




How do I replace a broken buckle on my backpack?

A broken hook end (male end) of your buckle is easy to replace. We'll show you how in just a few easy steps.

Written By: VAUDE Reparaturteam

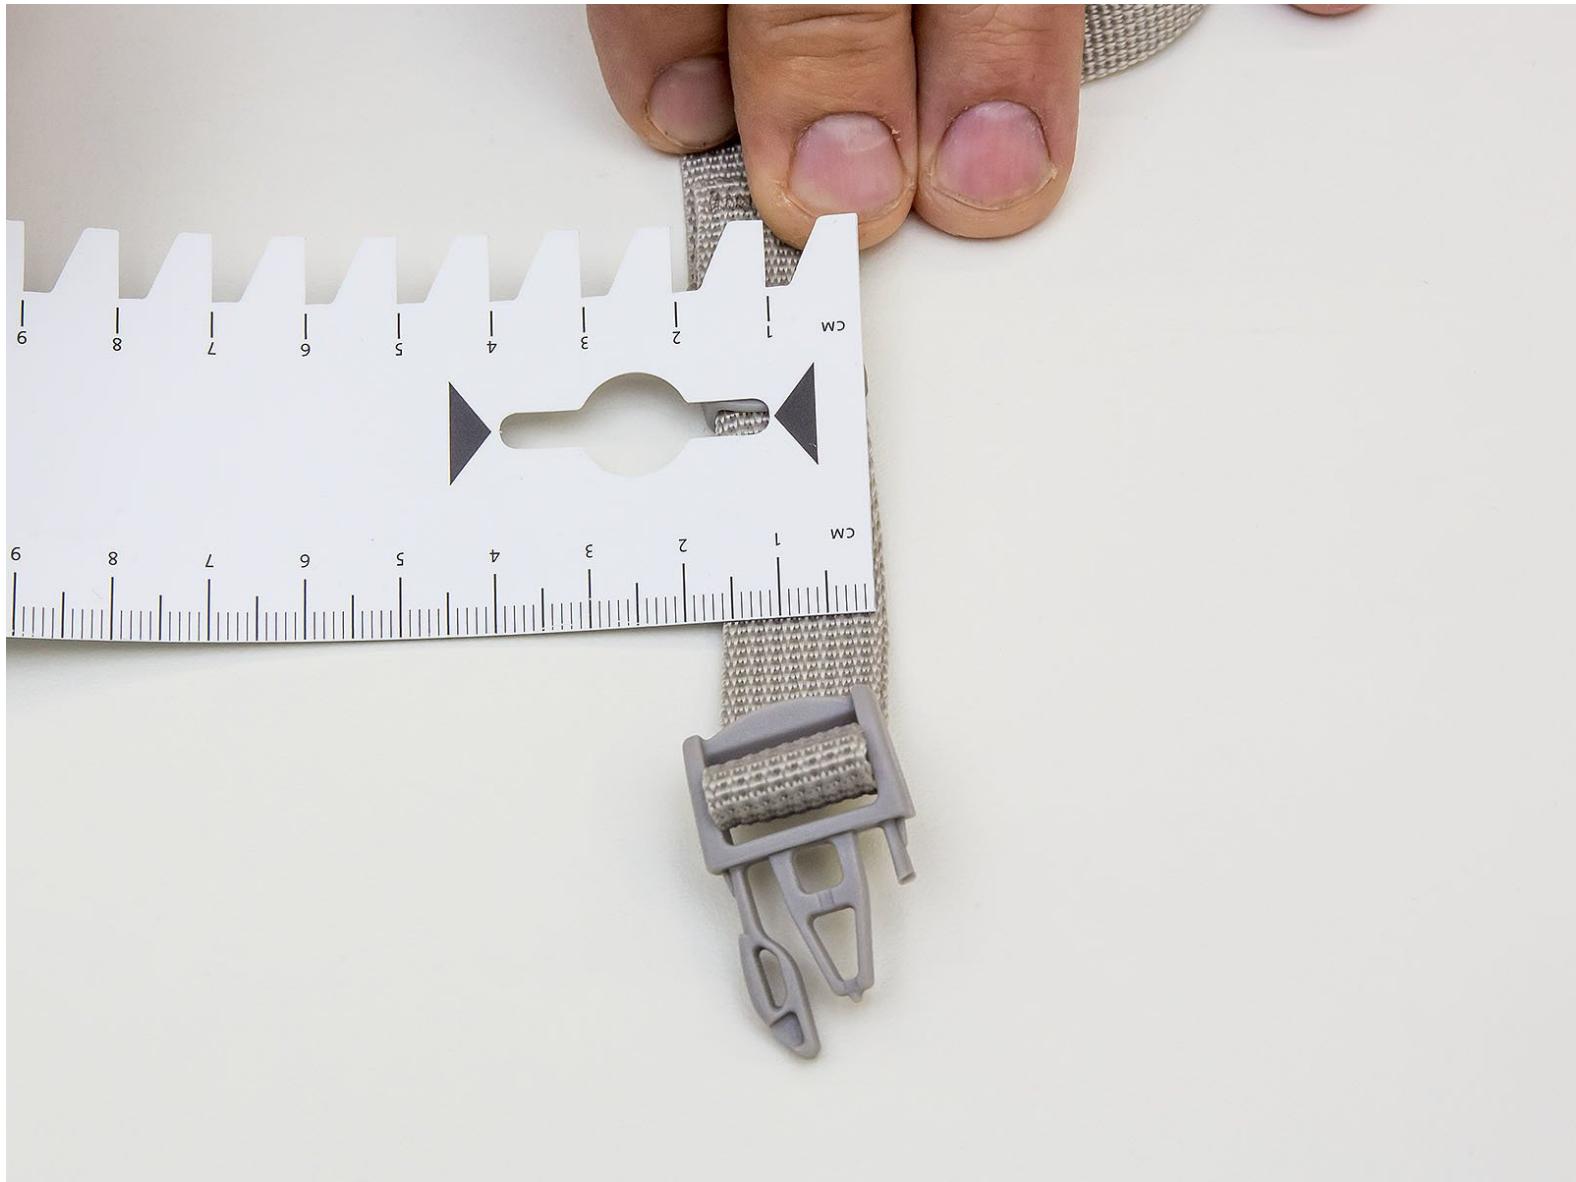

This document was generated on 2019-09-19 08:48:30 AM (MST).

INTRODUCTION

If the hook end (male end) of your buckle is broken, it's easy to replace. We'll show you how in just a few easy steps.


TOOLS:

- Flathead 3/32" or 2.5 mm Screwdriver (1)
- Measuring Tape (1)

PARTS:


- VAUDE Slide-in buckles Single Adjust (1)
- VAUDE Slide-in buckles Dual Adjust (1)

Step 1 — Buckle on backpack

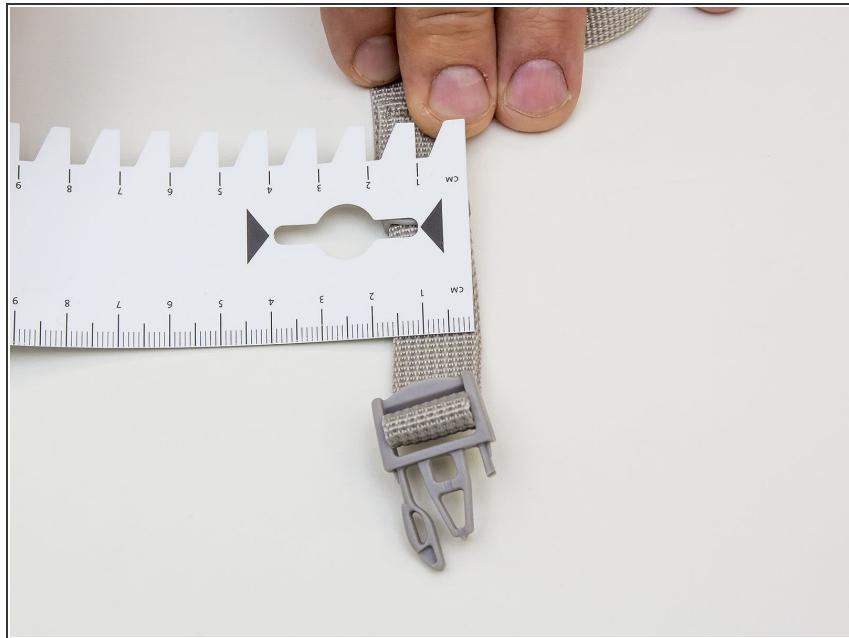

- In order to determine the correct buckle size, measure the webbing. The webbing illustrated here is 15 mm, so you would need a 15 mm buckle.

Step 2

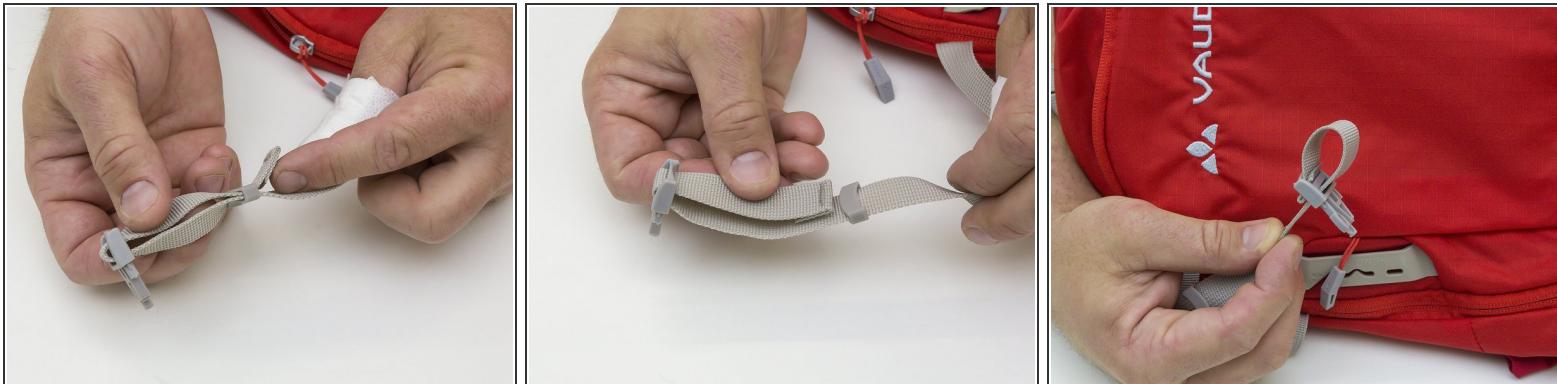

- Remove the broken buckle from the webbing by first pulling the webbing through the locking strap and then unthreading it from the buckle.

(i) Use a screwdriver or tweezers to help pull the webbing through, if necessary.

Follow the instructions in reverse order to finish your repair.