



How to Fix a Delta 5-Function Showerhead Model 75554

This repair guide helps fix a Delta 5-Function Shower head Model 75554. If not correctly fixed, it may result in slippery floors and hard water stains.

Written By: Faith Henson



This document was generated on 2019-10-20 01:30:14 PM (MST).

INTRODUCTION

This repair guide is a step-by-step of instructions to ensure you are using the correct materials and tools to fix your Delta 5-Function Showerhead Model 75554. This showerhead has a major leak in it, which I have found that it is where the screws onto the shower pipe itself. The reasoning behind this guide is that it gets very slippery when I walk into my shower because of how bad, and often the head is leaking.

TOOLS:

- [Teflon tape](#) (1)
- [Pipe Wrench](#) (1)
- [Wire Brush](#) (1)
- [Distilled White Vinegar](#) (1)
- [Warm water](#) (1)
- [Bowl](#) (1)
- [Pocket knife](#) (1)

Step 1 — How to Fix a Delta 5-Function Showerhead Model 75554



- Unscrew the head of the shower from the pipe with a pipe wrench.
- While using the pipe wrench, make sure not to clamp it too tight because it will crack the plastic.

Step 2



- Fill a large bowl with equal parts hot water and white distilled vinegar to get rid of hard water build up.

Step 3



- With the tip of a pocketknife, pick out the rubber, black washer in the attachment.
- Using your fingertips press a new 1" black rubber washer into the head attachment. The new washer will allow water to flow correctly with more pressure.


 Pocketknives can be very very sharp!

Step 4



- Wipe down with shower pipe with a hot water and vinegar soaked scrub brush.

Step 5

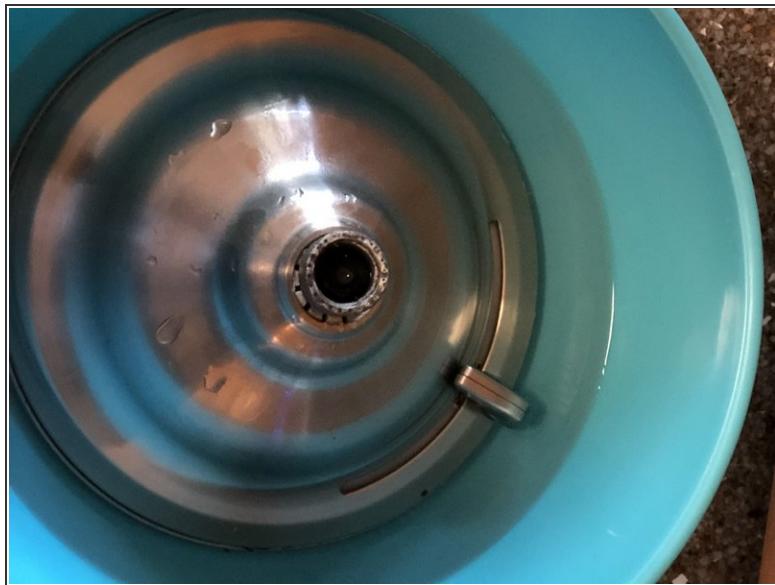

- Wrap Teflon tape around the legs of the spout about 3 times to ensure that it will screw on tight when the head is put back on.

① Now is the time to take the shower head out of the vinegar water.

Step 6



- Twist the shower head back onto the pipe and tighten it with the pipe wrench.