



# Hp 15-f305dx Screen Replacement

This guide will instruct you on how to replace your Hp 15-f305dx screen.

Written By: Brandon



 **TOOLS:**

- **Spudger** (1)
- **Phillips #0 Screwdriver** (1)

## Step 1 — Battery



! Turn off the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.

## Step 2



- Turn the computer upside down on a flat surface.

## Step 3




- Firmly slide the release latch to unlock the battery and slide the battery release latch to release the battery.

## Step 4




- Lift the battery from the middle and then pivot it outward to remove it from the comp.

## Step 5 — Screen

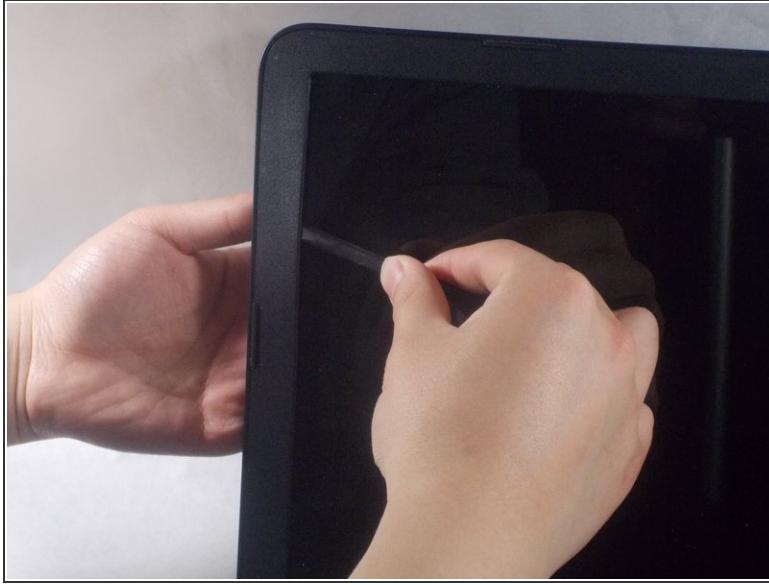

- Remove the bezel by prying it away from the screen using the spudger.

## Step 6

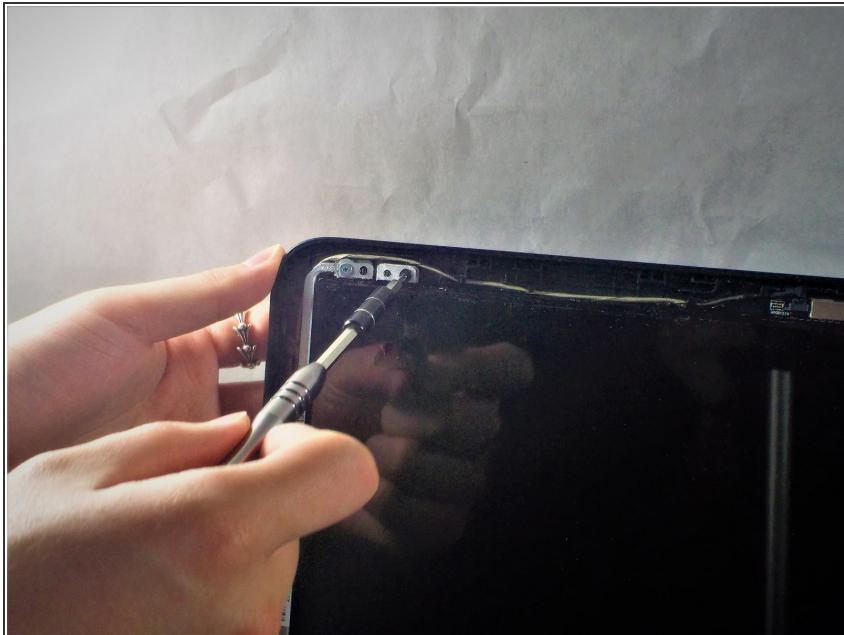


- Remove the four 3mm PH1 Phillips head screws in each corner of the screen and do not care about outer screws.

## Step 7



- Remove the screen and place the screen very softly on the keyboard.

## Step 8

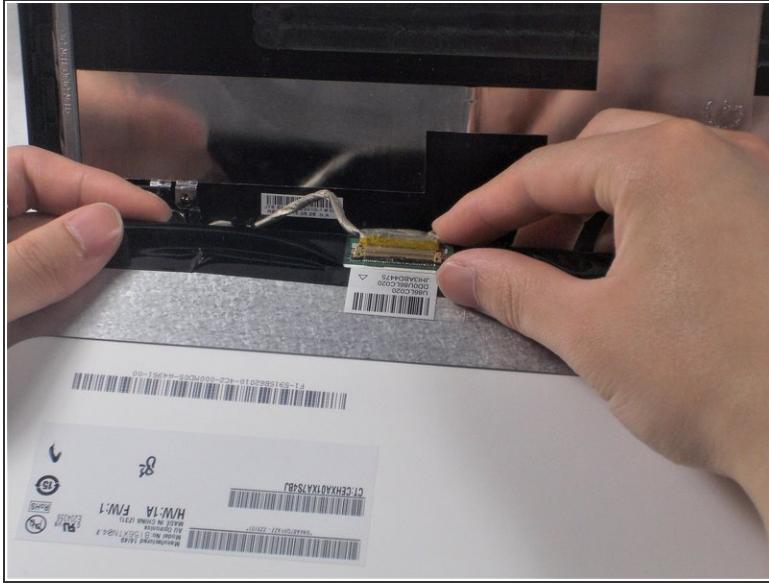

- Remove the sticker gently and disconnect the metal blade.

To reassemble your device, follow these instructions in reverse order.