



# Huawei Ascend W1 Antenna Replacement

This guide will show you the steps to removing the antenna.

Written By: Jaie Hillary



## INTRODUCTION

It is a fairly simple and straightforward guide. Just be gentle when you're removing the parts. They can break easily.

### TOOLS:

- [T6 Torx Screwdriver](#) (1)
- [Spudger](#) (1)
- [Small Needle Nose Pliers](#) (1)

## Step 1 — The phone's orientation.



- Flip the device over so that the back of the phone is facing you and the screen is against your palm.

## Step 2 — Removing the back cover.



- Locate the slit at the bottom of the back cover.
- Using your fingernail, lift up on the back cover to expose the battery.

## Step 3



- Lift the back cover off the phone.
- (i)* The back cover is snapped onto the phone so you will feel it unsnapping as you remove it.

## Step 4 — Removing the battery.




- Find the indented notch at the base of the battery.
- Lift the battery out of the phone with your fingers by pressing forward and lifting upward.

## Step 5 — Remove all the screws.




- After removing the battery, remove the screws using a T6 screwdriver.
- There are eleven screws that hold the middle cover to the rest of the phone.
- The screw that is marked by the orange circle is covered by a white dot.

## Step 6 — Removing lower section of the middle cover.

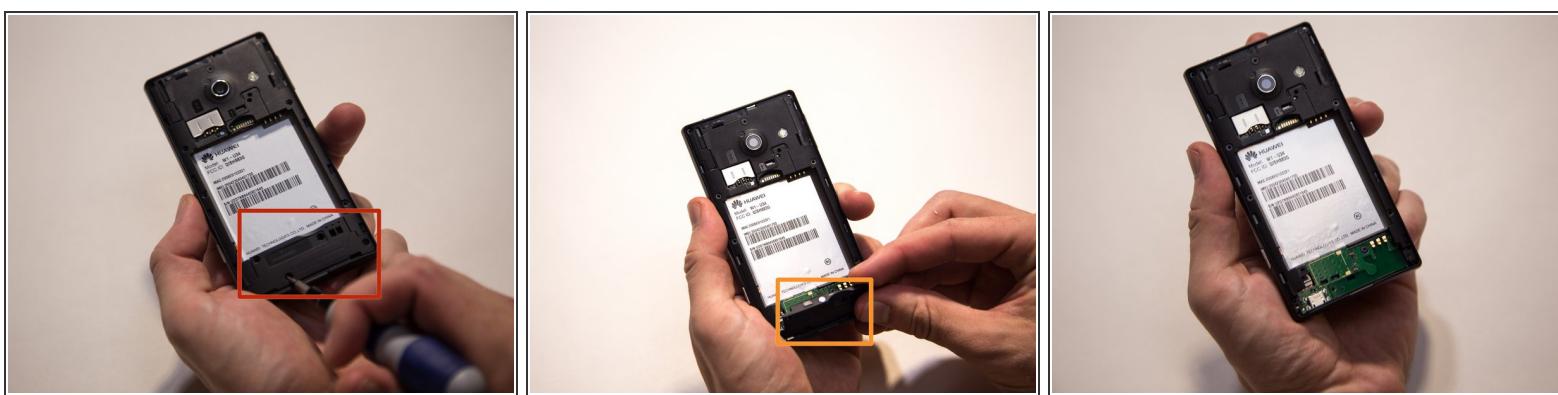

- After all the screws are removed, use your fingers to remove the lower section of the middle cover.
- Pull the lower section of the middle cover outward towards you, exposing the circuit board underneath.


## Step 7 — Removing the rest of the middle cover.

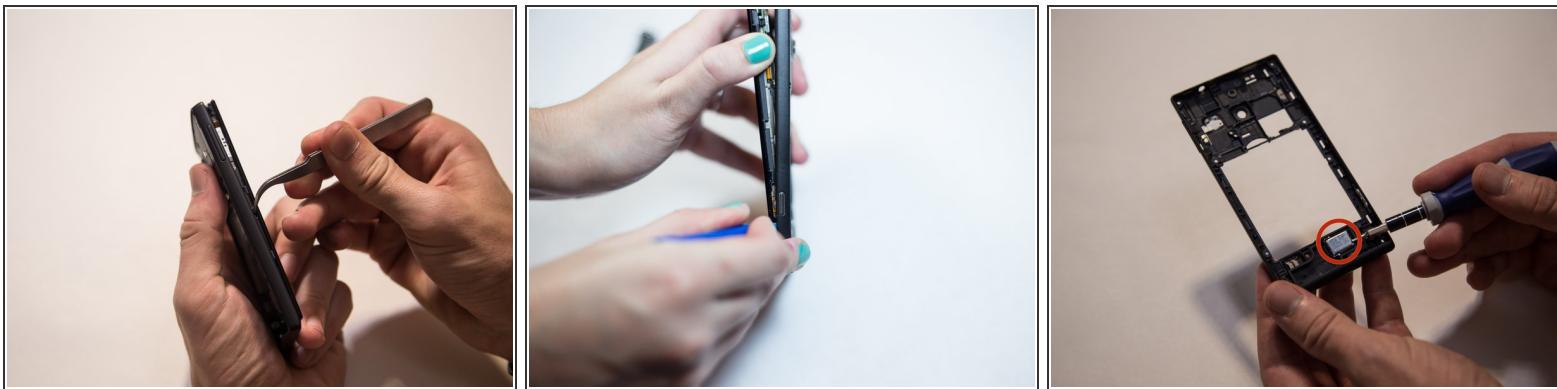

- Begin working your way around the sides of the cover plate, unsnapping it gently.
- The middle cover is a thin piece of plastic with the external speaker inside of it.

 Be **gentle** as you remove circuit cover. The parts might break if you are too forceful.

## Step 8 — Locating the antenna.

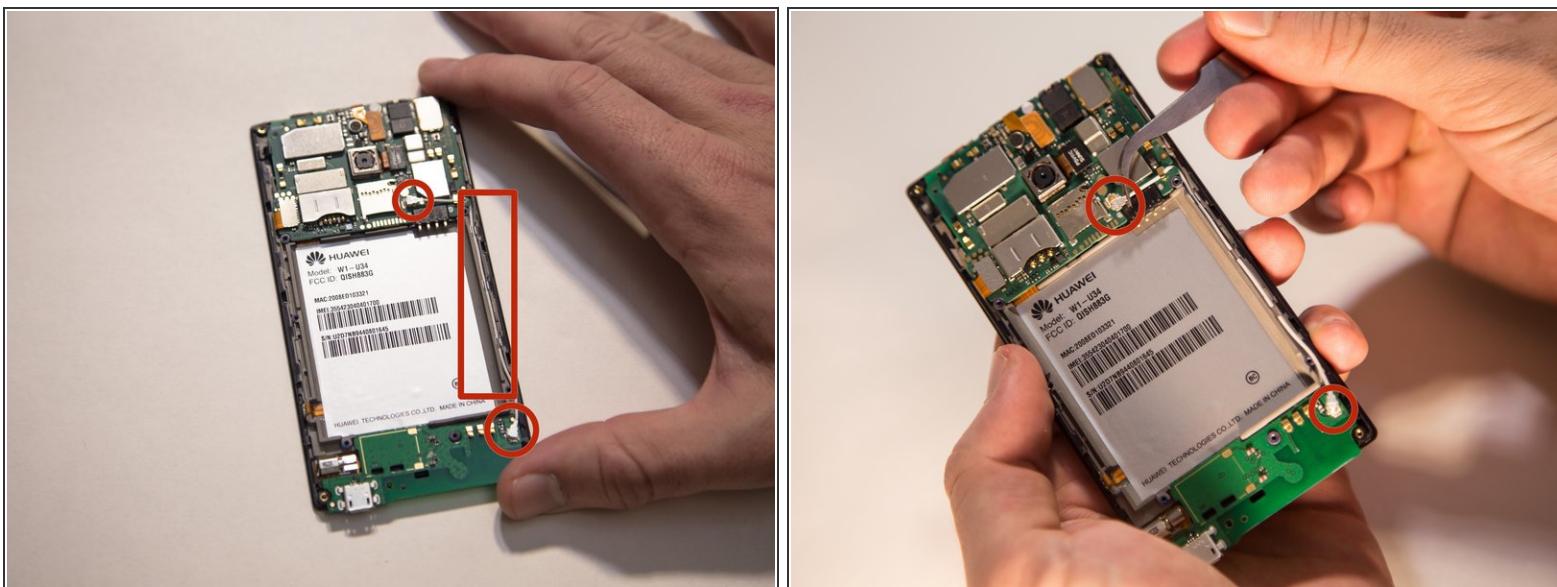

 The middle covers are removed.

- The antenna is a thin white wire that connects to the circuit board in two locations.

## Step 9 — Removing the antenna



- Lift gently at each connector of the white wire to disconnect the antenna from the port.

To reassemble your device, follow these instructions in reverse order.