



# Huawei Honor 10 Loudspeaker Unit Removal

This guide shows how to remove the loudspeaker unit including the vibration motor and the daughterboard cover for the Huawei Honor 10.

Written By: Dominik Schnabelrauch



## INTRODUCTION

Use this guide to remove the loudspeaker unit including the vibration motor and the daughterboard cover for the Honor 10.

You'll need **replacement adhesive** to reattach components when reassembling the device.

### TOOLS:

- [iOpener](#) (1)
- [iFixit Opening Picks set of 6](#) (1)
- [Suction Handle](#) (1)
- [Tweezers](#) (1)
- [Phillips #00 Screwdriver](#) (1)
- [Spudger](#) (1)

## Step 1 — Rear Glass



- Before you begin, switch off your phone.
- Apply a [heated iOpener](#) to a long edge of the phone to loosen the adhesive beneath the rear glass. Apply the iOpener for at least two minutes.

## Step 2



ⓘ If the phone's rear glass is cracked, the suction cup may not stick. Try [lifting it with strong tape](#), or superglue the suction cup in place and allow it to cure so you can proceed.

- Press a suction cup onto the back cover.
- Lift the back cover's right edge with your suction cup, opening a slight gap between the back cover and the frame.
- Insert the tip of an opening pick in the gap you created and slide it to the bottom right corner.

## Step 3



*(i)* **Apply more heat** if the adhesive becomes hard to cut. During the removal process, the back cover is under tension all the time and is likely to break if the adhesive isn't softened enough.


- Insert a second opening pick at the bottom right corner of the rear glass.
- Slide the opening pick along the bottom edge of the rear glass to cut the adhesive and leave it in the bottom left corner.

## Step 4



- Insert a third opening pick at the bottom left corner of the rear glass.
- Slide the opening pick along the left edge of the rear glass to cut the adhesive.
- Leave the opening pick at the top left corner of the rear glass.

## Step 5

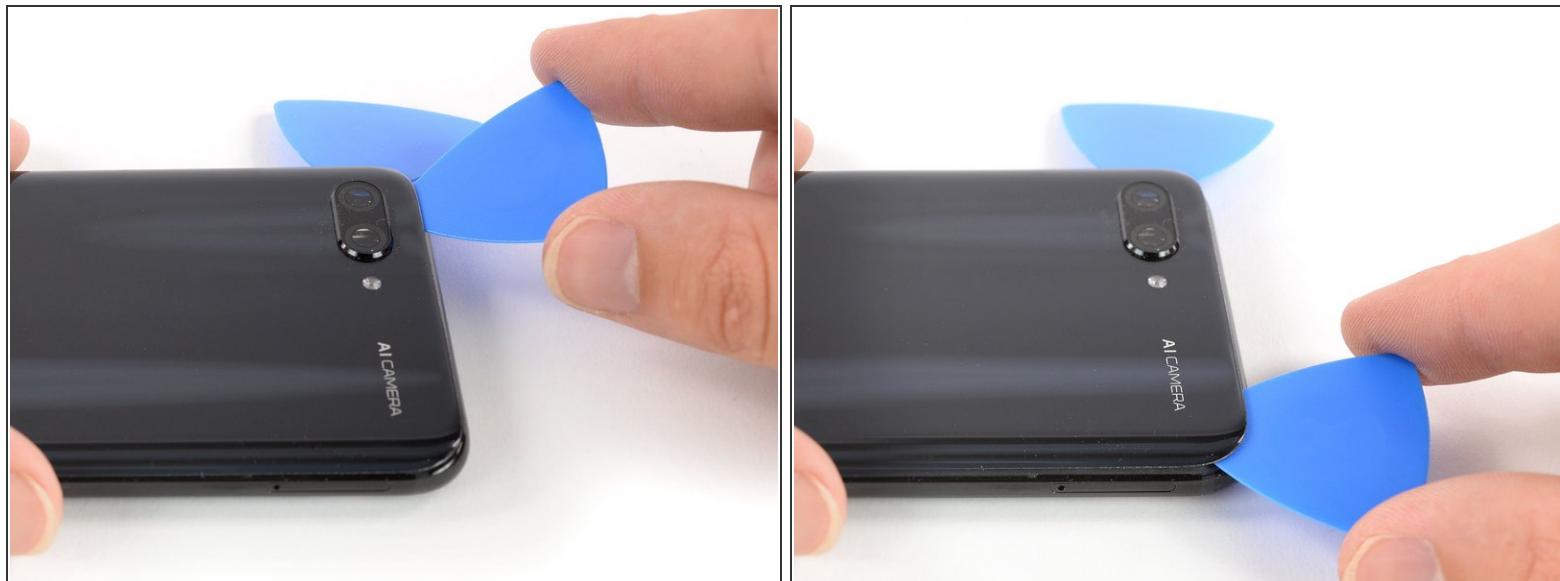

- Insert a fourth opening pick at the top left corner of the rear glass.
- Slide the opening along the top edge of the rear glass and cut the remaining adhesive with it.

## Step 6



- Carefully lift the rear glass of the Huawei Honor 10 and remove it.

## Step 7 — Battery disconnect



- Use a pair of tweezers to carefully peel the black foil off the loudspeaker and daughterboard cover.
- Remove the foil completely.

## Step 8



- Remove the three Phillips #00 screws (2.9 mm length) that secure the metal bracket on top of the battery, interconnect, and display flex cable.

## Step 9



- Use a pair of tweezers to remove the metal shield that covers the connectors of the interconnect cable, the battery and the display flex cable.

## Step 10




- Use a spudger to pry up and disconnect the battery flex cable.

## Step 11 — Loudspeaker Unit



- Remove the seven Phillips screws securing the loudspeaker unit:
  - Three silver 2.9 mm long screws
  - Four black 3.4 mm long screws

## Step 12

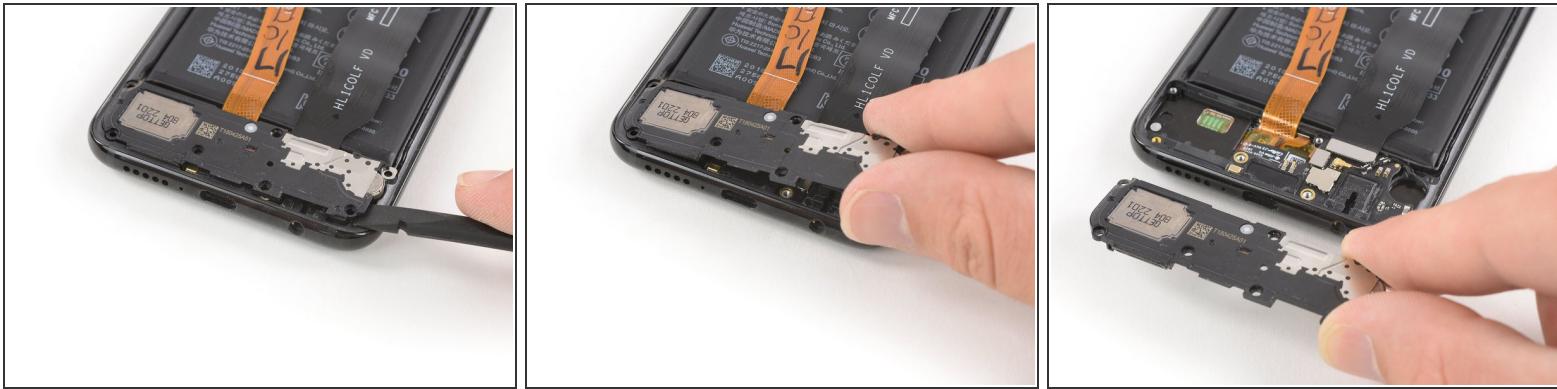

ⓘ There's a little bit of adhesive under the loudspeaker. It's possible to remove the loudspeaker without heating the adhesive but if you're having a hard time removing it, you can [use an iOpener](#) to soften the adhesive.

- Slide the flat end of a spudger under the right side of the loudspeaker unit.
- Pry up the loudspeaker unit until you can get a good grip.
- Remove the loudspeaker unit.

To reassemble your device, follow these instructions in reverse order.