




Huawei Honor 6x Back Cover Replacement

Use this guide to open your Huawei Honor 6x and access its components.

Written By: Hudson Brooks

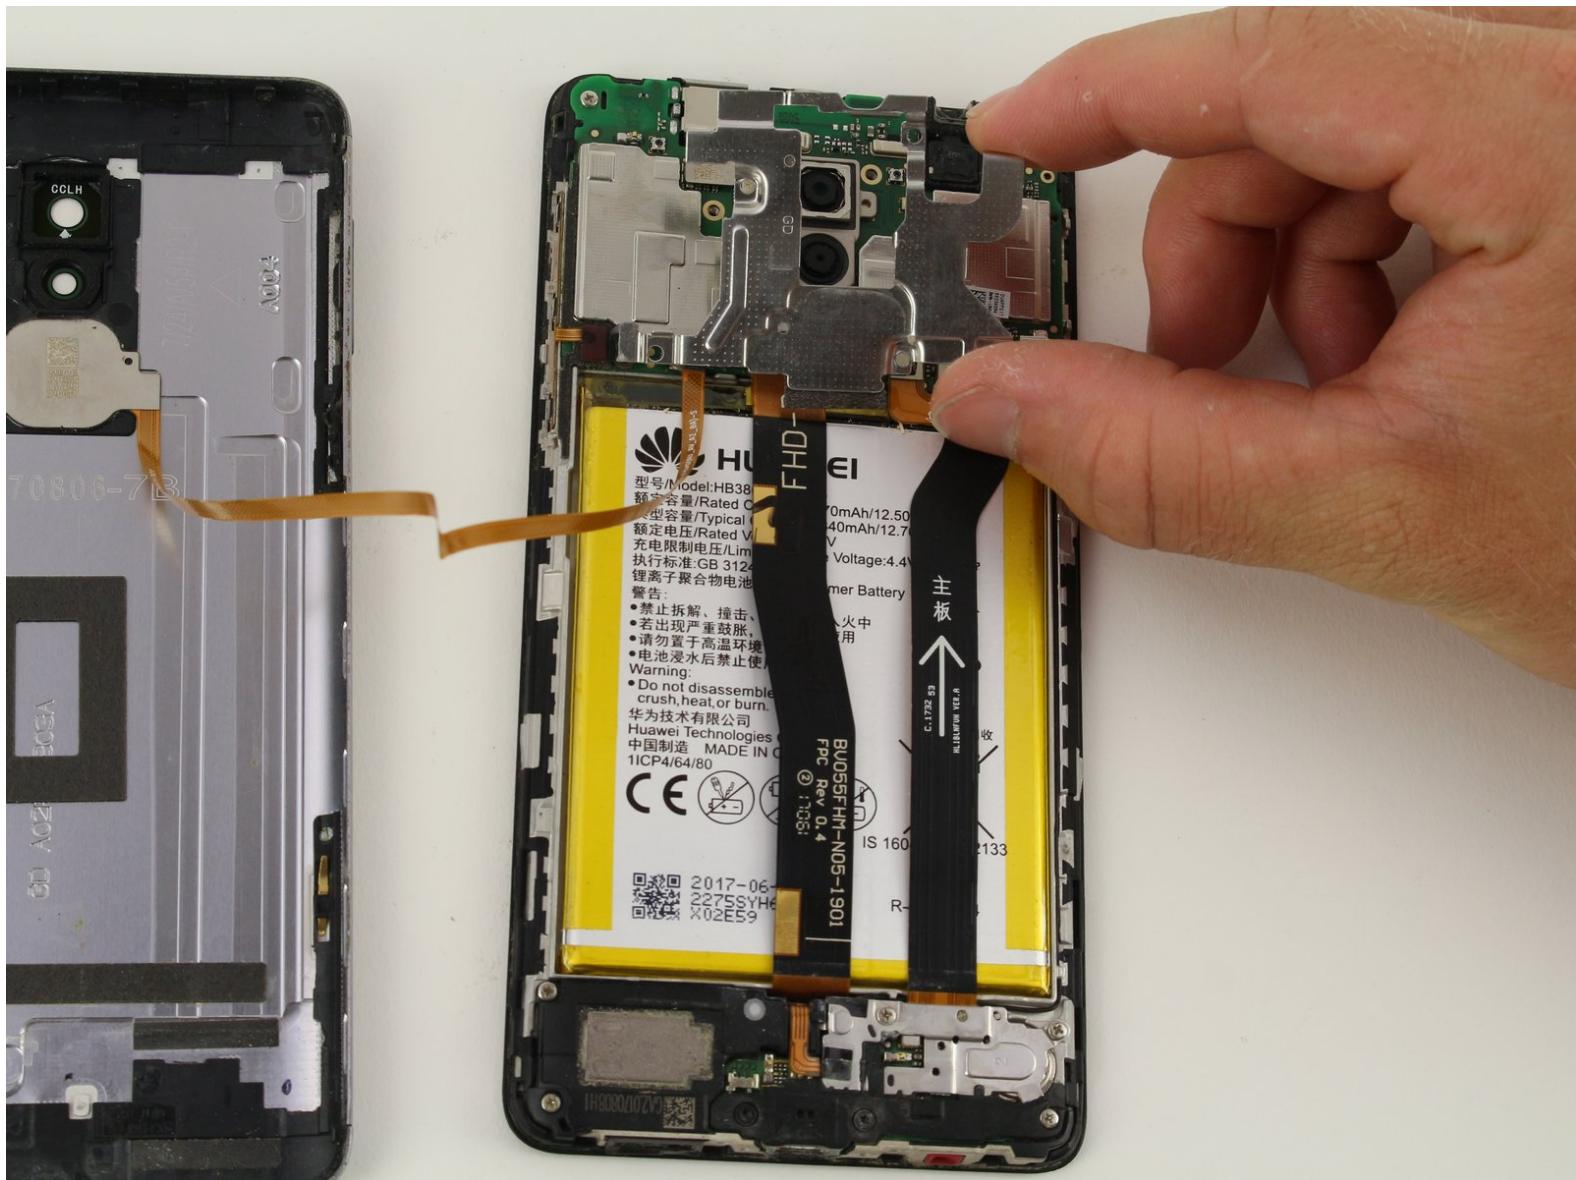

INTRODUCTION

This guide will be detailing how to separate the screen and back panel in your Huawei Honor 6x. This the first step in most replacement guides for this device.

TOOLS:

- [SIM Card Eject Tool](#) (1)
A small paper clip works sufficiently
- [Spudger](#) (1)
- [iFixit Opening Tools](#) (1)
- [Phillips #0 Screwdriver](#) (1)

Step 1 — SIM Card




- Turn off the device.

Step 2




- Insert the SIM Card Eject Tool into the SIM card tray hole.
- Press the eject tool into the hole until the tray clicks open.

Step 3

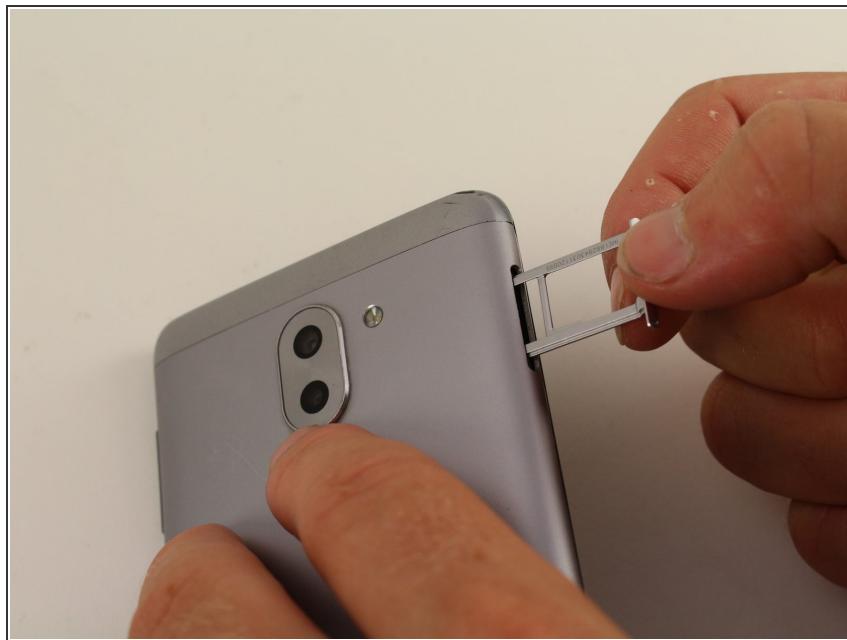

- Remove the SIM tray from the device using two fingers.
- ☒ When reinserting the SIM card, be sure it is properly aligned with the SIM tray.

Step 4

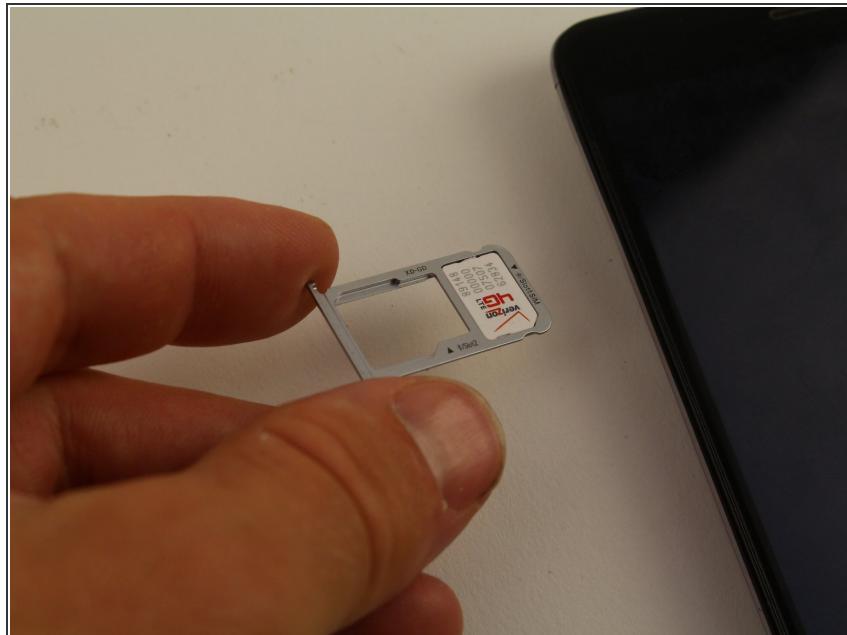

- Remove the SIM card from the compartment using two fingers.

Step 5 — Back Cover




- Insert a plastic opening tool into the Micro USB charging port with the angled side of the tool facing the screen.
- Pry the screen off the back of the phone by pushing down on the opening tool.

Step 6



- Slide the opening tool or spudger along the bottom of the phone and around the edge.

Step 7

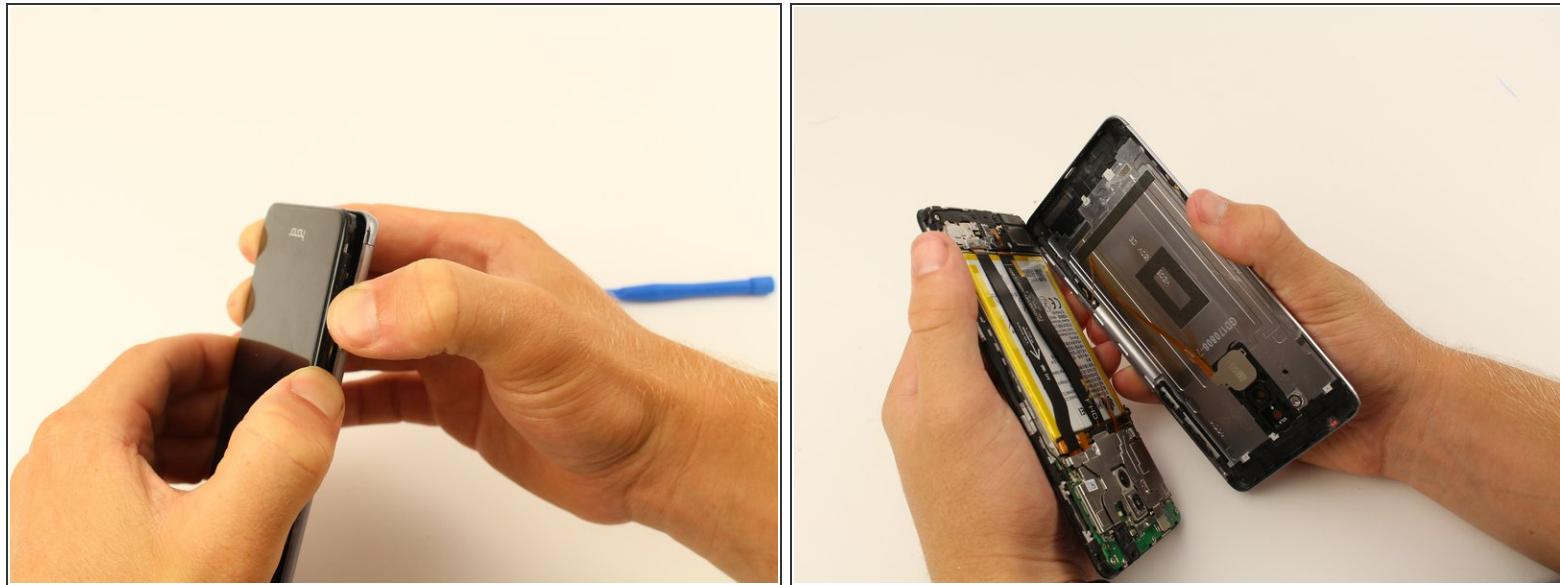

- Once three sides of the screen are detached, pry the phone apart using two hands.


⚠ When separating the back panel from the screen, do not pull them too far apart. There is an interconnect that is attached to both sides that could break, or tear, if pulled too far.

Step 8



- Remove the five 4mm Phillips #00 screws using a screwdriver.

Step 9

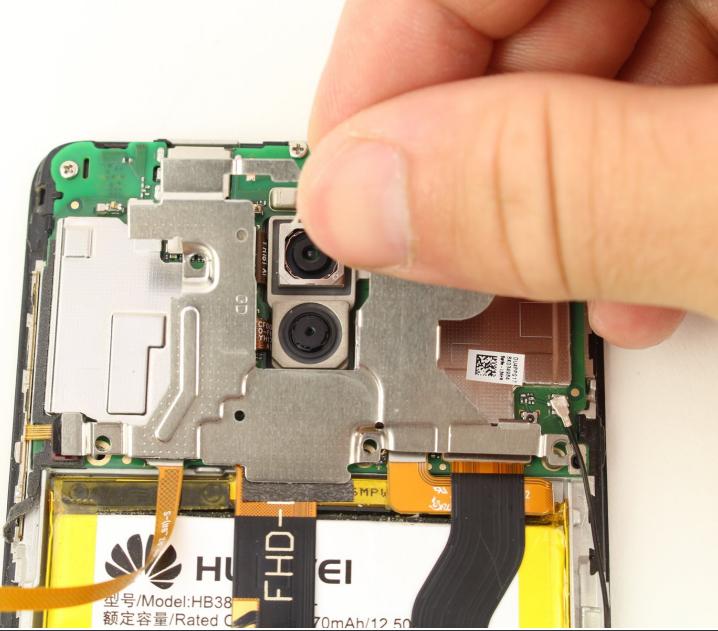

- Remove the motherboard cover from the device using a spudger or your fingers.

To reassemble your device, follow these instructions in reverse order.