



Huawei MediaPad M3 Display Assembly Replacement

This guide will be helpful for removing the display assembly of the Huawei MediaPad M3 tablet.

Written By: Kefan Lin




INTRODUCTION

This guide is about how to replace the Display assembly of Huawei MediaPad M3. Removing the display is a prerequisite of removing or displacing many other parts such as the front camera, the motherboard, and the rear camera. It is an 8.40 inch touchscreen with a resolution of 2560*1600 pixels at a pixel density of 359 pixels per inch. The display itself is thin and fragile; therefore all steps should be followed carefully.

TOOLS:


- [Phillips #00 Screwdriver](#) (1)
- [Heat Gun](#) (1)
- [iFixit Opening Picks set of 6](#) (1)
- [Suction Handle](#) (1)
- [iFixit Opening Tools](#) (1)

Step 1 — Display Assembly

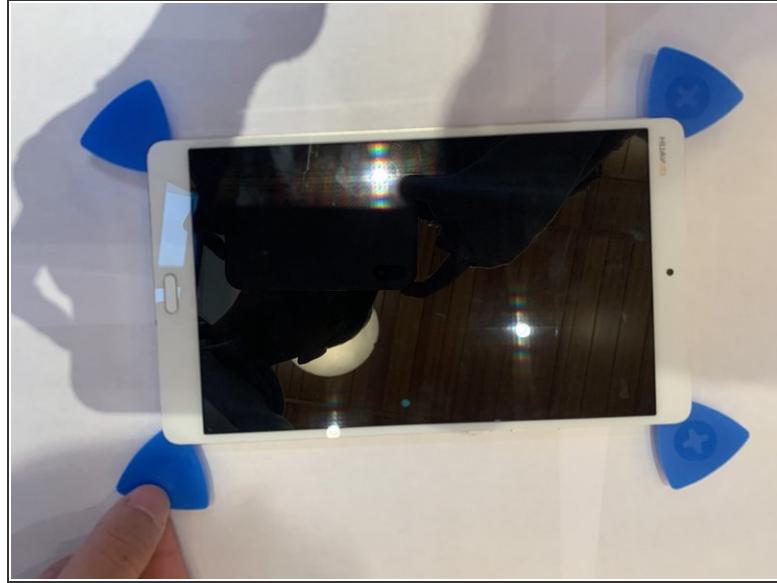


- Use a heat gun to heat the display. It may take up to 30 seconds.
- Slide in the opening picks to the four corners of the tablet and peel off the display carefully.

Step 2

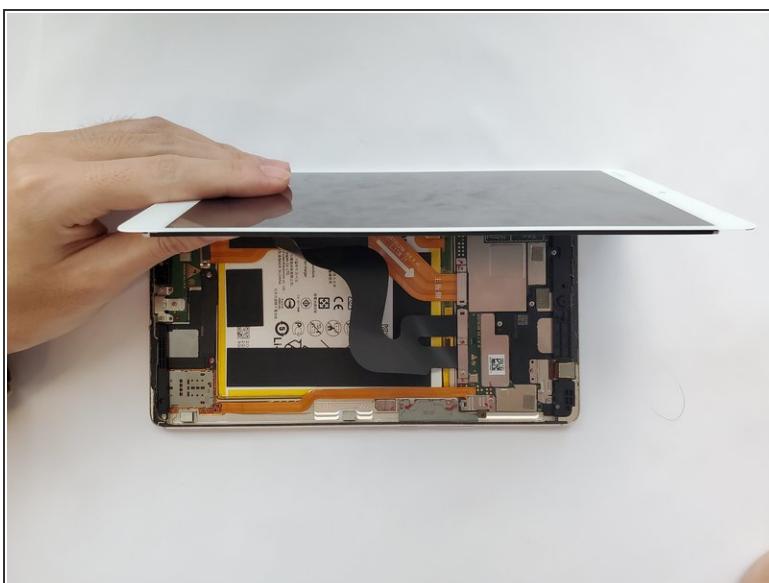

- Open the display carefully.
- Use a Phillips #00 screwdriver to remove the two 3.0mm screws.

Step 3

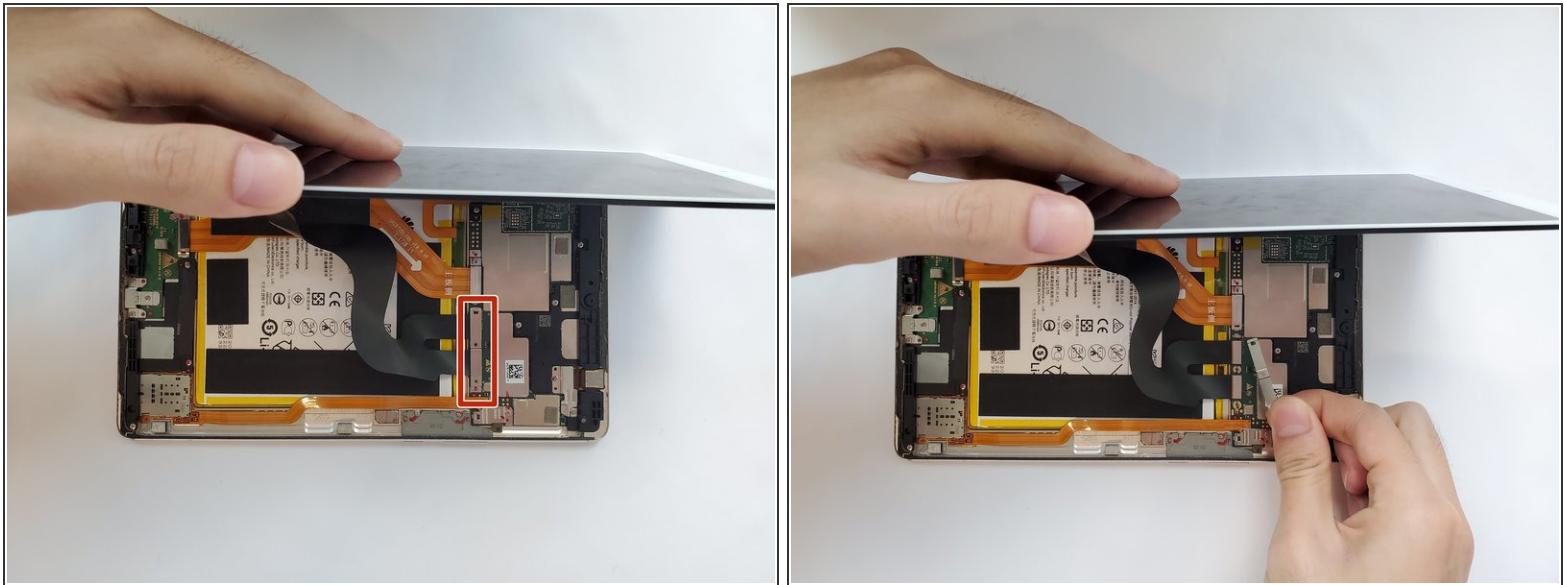


- After removing the two screws, use your hand to take out the silver metal bracket.

Step 4



- Use the plastic opening tool to disconnect the two ribbon cable connectors.

Step 5

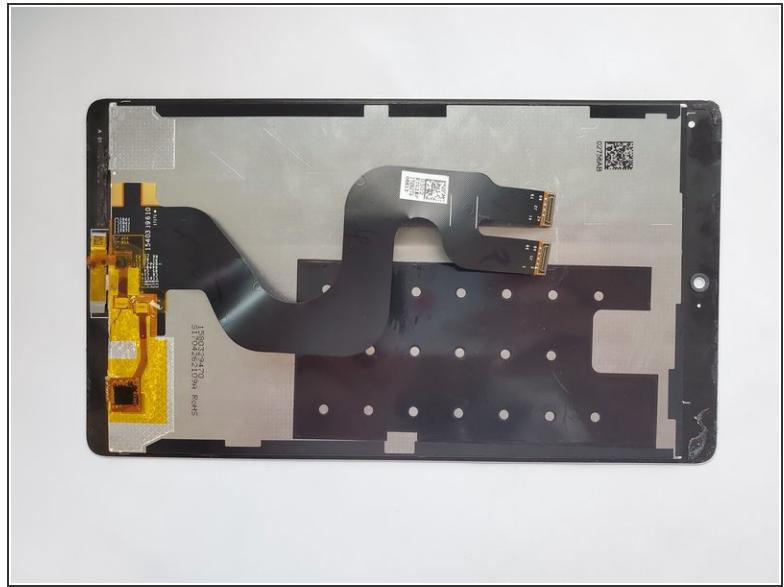

- Remove the display assembly from the device.

To reassemble your device, follow these instructions in reverse order.