




# Huawei MediaPad M3 Rear Camera Replacement

This guide is about how to replace the rear camera of Huawei MediaPad M3.

Written By: Kefan Lin

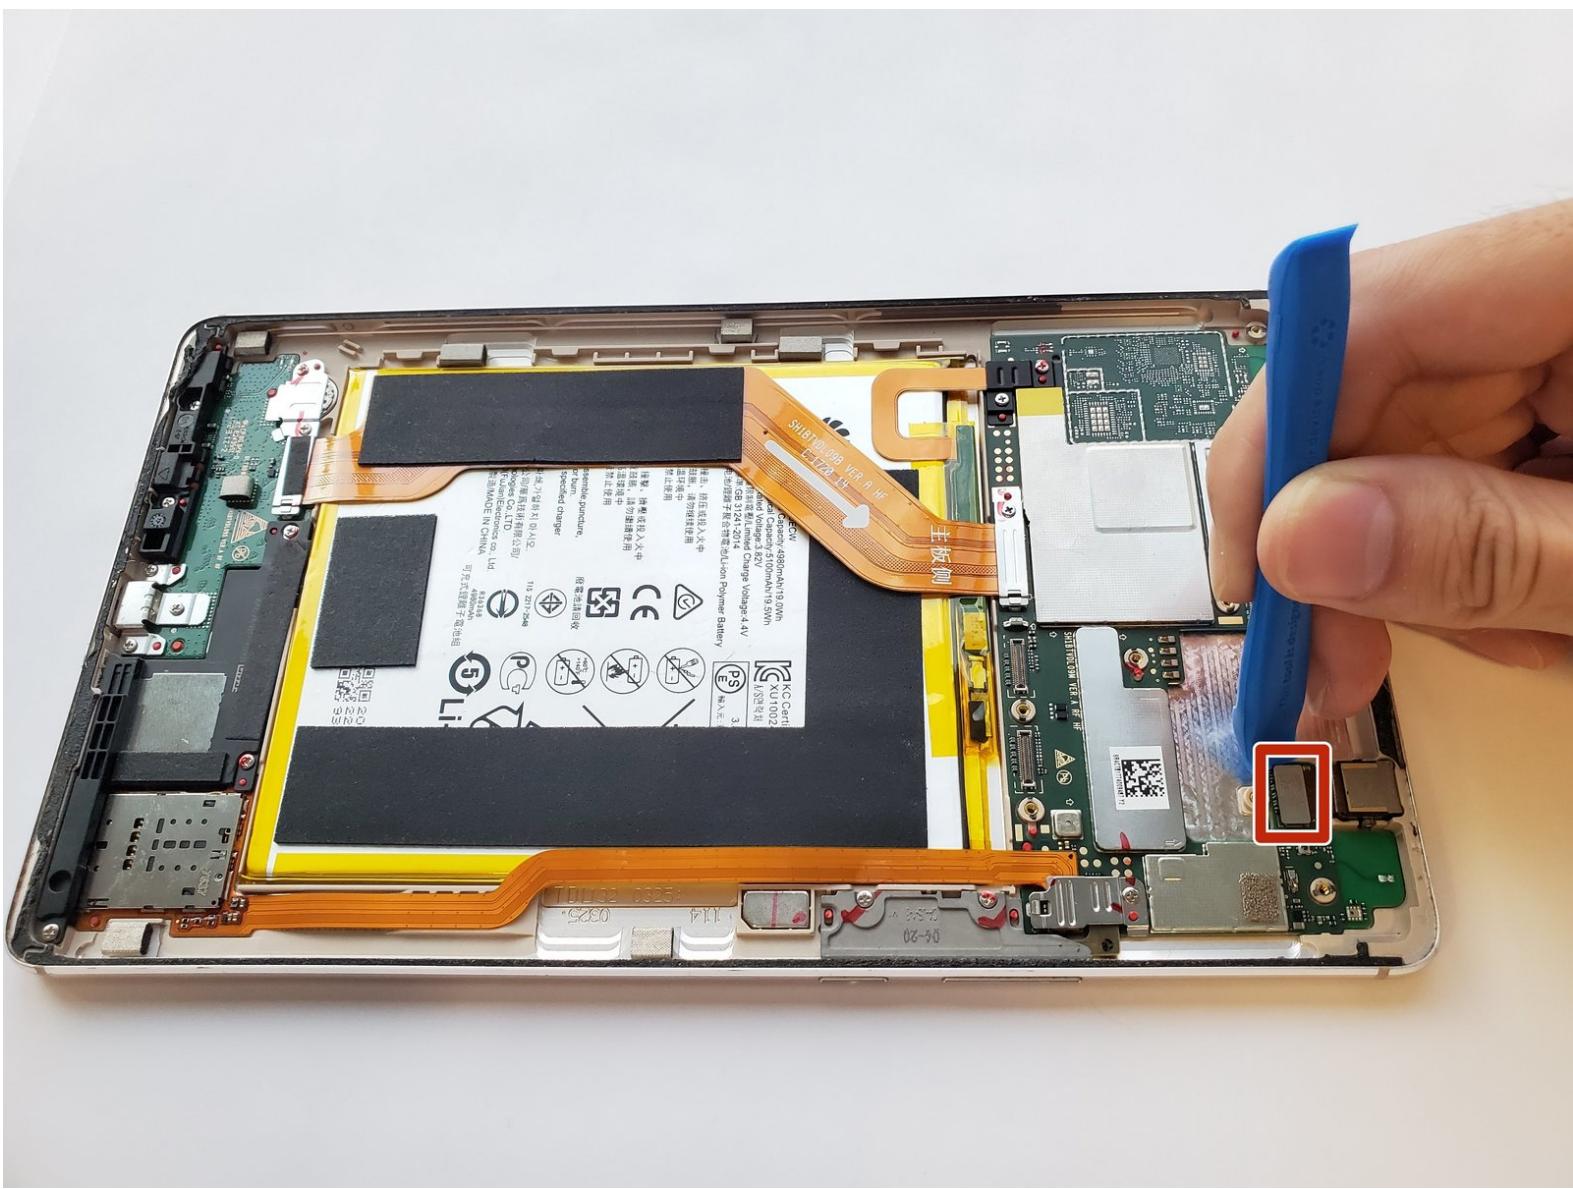

## INTRODUCTION

This guide is about how to replace the back camera of Huawei MediaPad M3. A prerequisite of this guide is removing the display. Please see the “Display assembly” guide. Rear camera has 8-mega pixels with a flashlight. Screws and the camera itself are relatively small; please store them carefully for reassembly.

## TOOLS:

- Heat Gun (1)
- iFixit Opening Picks set of 6 (1)
- Suction Handle (1)
- Phillips #00 Screwdriver (1)
- iFixit Opening Tools (1)

## Step 1 — Display Assembly




- Use a heat gun to heat the display. It may take up to 30 seconds.
- Slide in the opening picks to the four corners of the tablet and peel off the display carefully.

## Step 2



- Open the display carefully.
- Use a Phillips #00 screwdriver to remove the two 3.0mm screws.

## Step 3

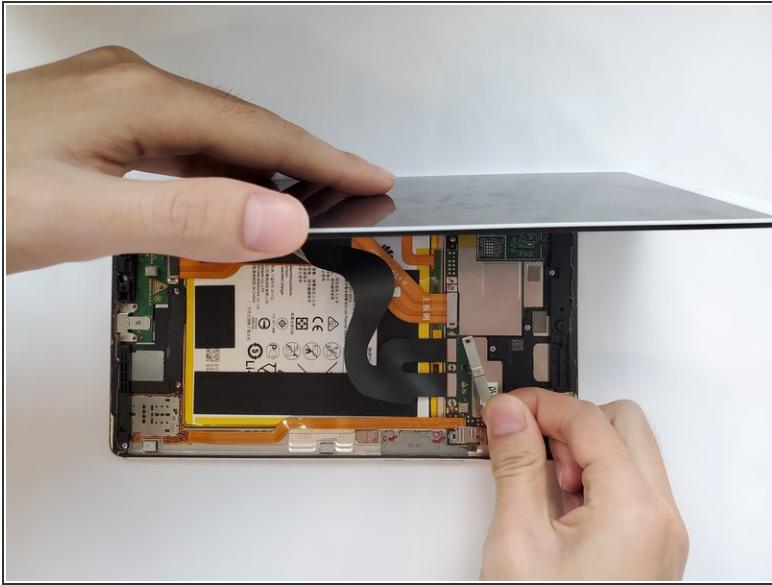


- After removing the two screws, use your hand to take out the silver metal bracket.

## Step 4




- Use the plastic opening tool to disconnect the two ribbon cable connectors.

## Step 5

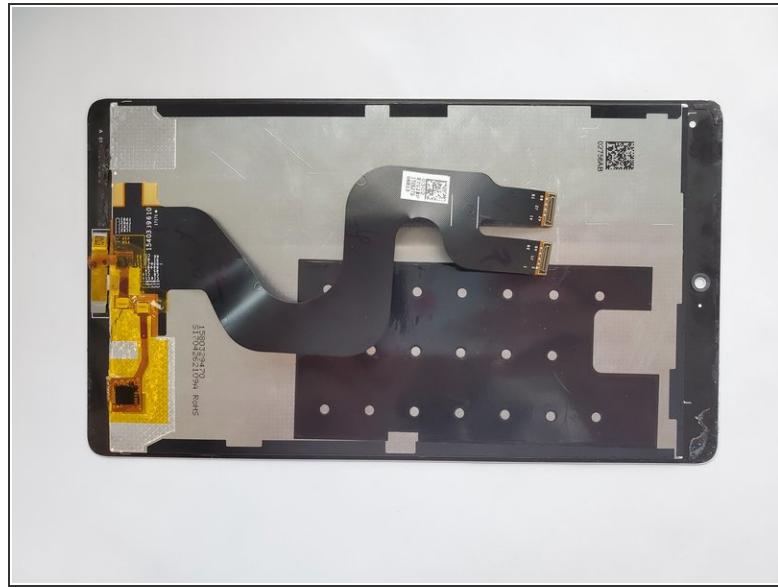

- Remove the display assembly from the device.

## Step 6 — Front Camera

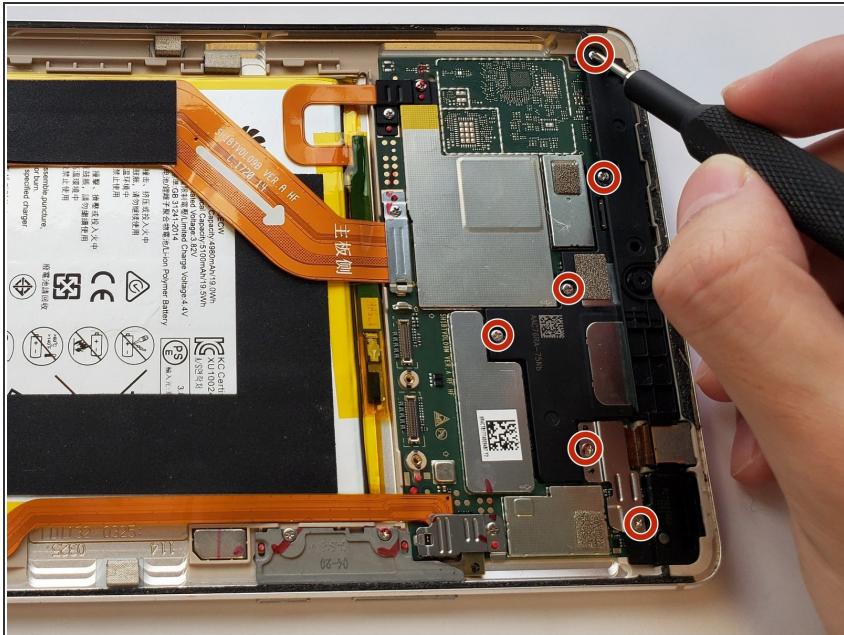

- Use a Phillips #00 screwdriver to remove the six 3.0mm screws.

## Step 7




- Use your hand to remove the silver metal bracket.

## Step 8



- Use your hand to remove the two black plastic covers.

## Step 9

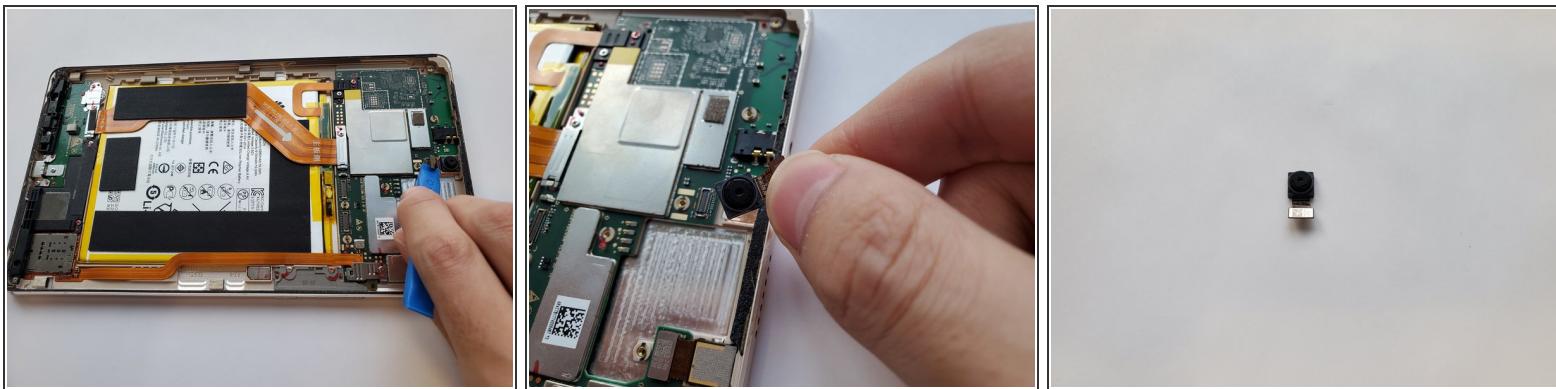

- Use a plastic opening tool to remove the front camera.

## Step 10 — Rear Camera



- Disconnect and remove the camera from the motherboard.

To reassemble your device, follow these instructions in reverse order.