




Huawei Mediapad t1 7.0" Touchscreen Replacement

Follow the guide to replace touchscreen glass


Written By: Smilzo

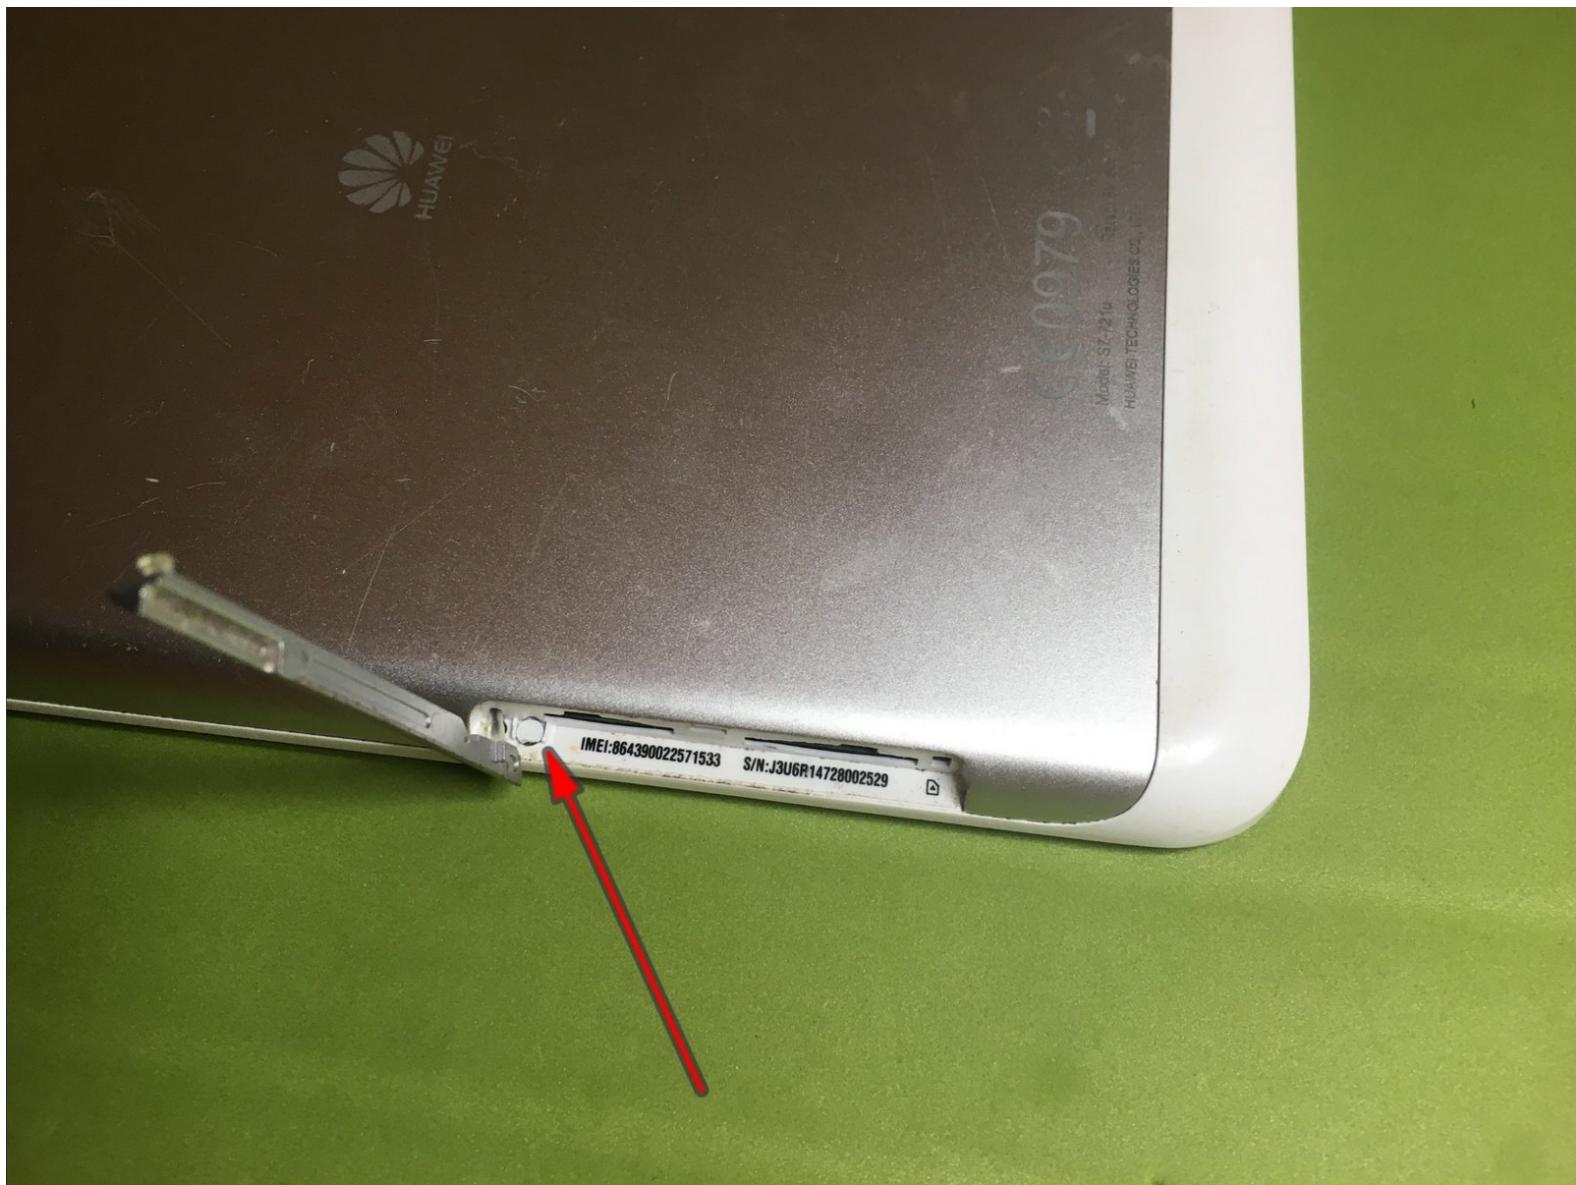

INTRODUCTION


Follow the guide to replace touchscreen glass

Step 1 — Touch Screen

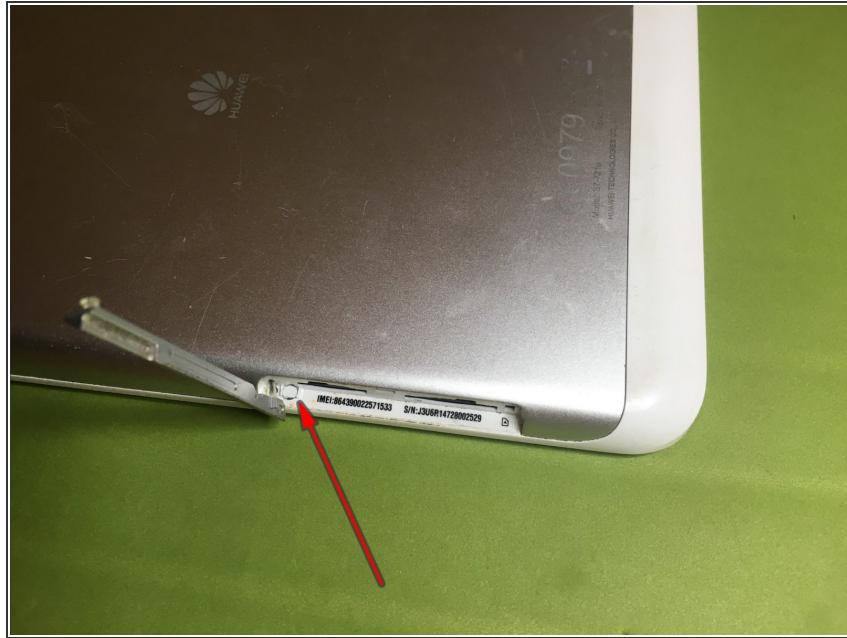


- Open the SD slot and remove the screw hidden under the sticker.

Step 2

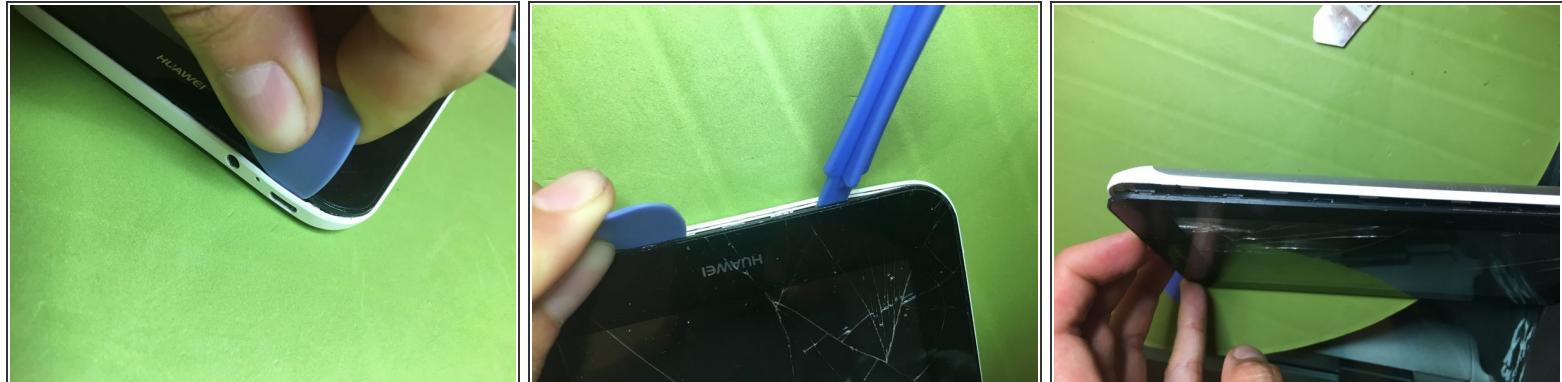

- Use an opening pick to disengage the clips securing the back cover.

Step 3

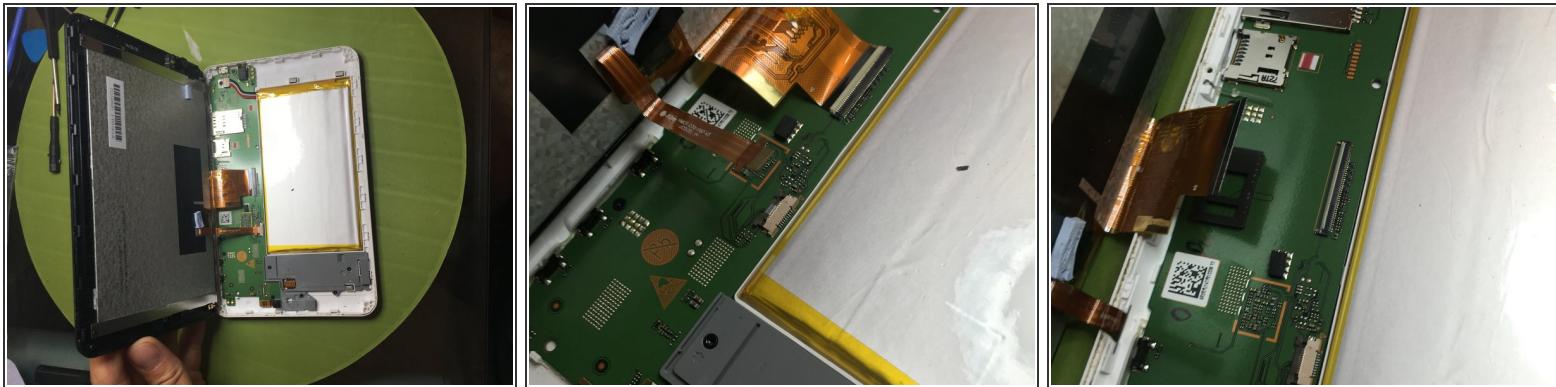

- Carefully swing up the display assembly, still connected by the touchscreen and display ribbon cables.
- Disconnect the touchscreen connector.
- Disconnect the display connector.

Step 4



- Remove the 6 screws that secure the 2 metal stripes holding the display.
- Remove the display.

Step 5



- Apply heat on the panel edges. Use an opening pick to separate the glass panel from the plastic frame.

Step 6



- Remove any remaining adhesive and piece of glass to allow adhesive and glass panel replacement.

To assemble the device, follow these instructions in reverse order.