




Huawei P8 Lite Earpiece Speaker Replacement

Guide to safe replacement of the Huawei P8 Lite earpiece speaker.

Written By: Brayden Mann

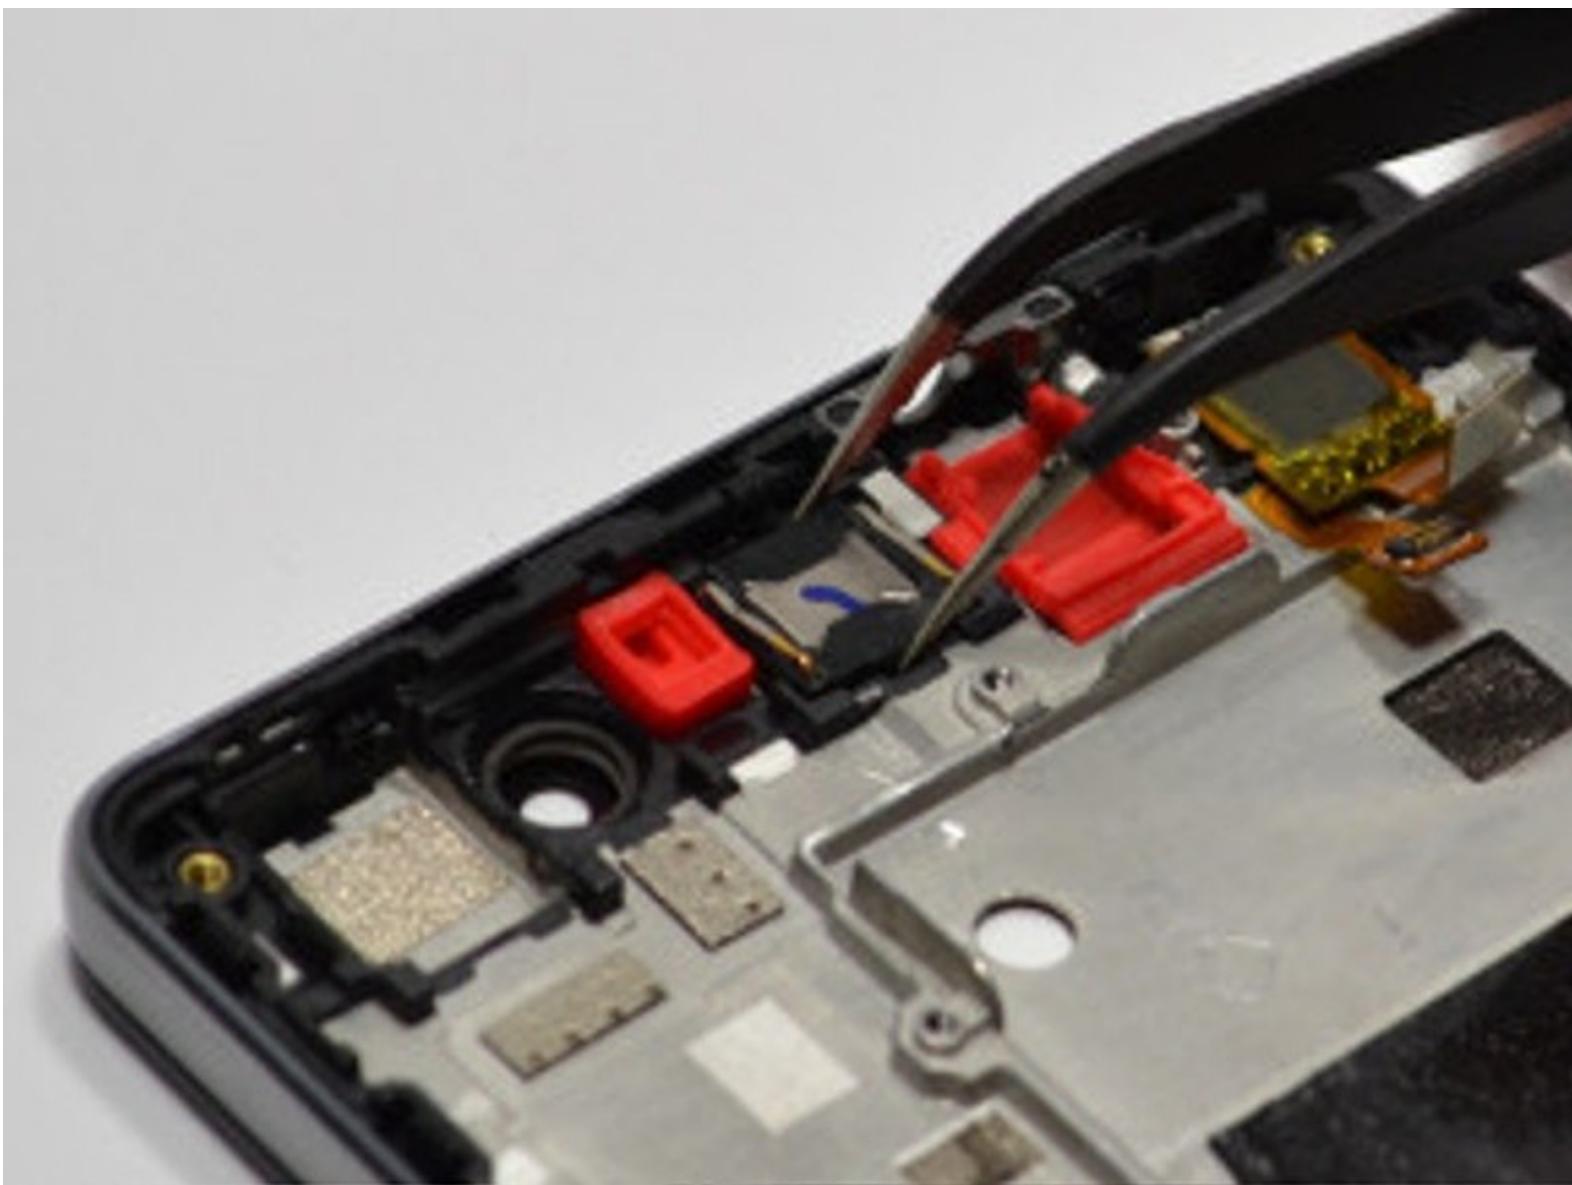

INTRODUCTION

This guide will instruct step-by-step how to disassemble the P8 Lite and replace the earpiece speaker. A [breakdown kit](#) and a replacement earpiece speaker will be required. Review the device [Teardown Guide](#) to get started.

TOOLS:


- [Phillips #000 Screwdriver](#) (1)
- [SIM Card Eject Tool](#) (1)
- [Spudger](#) (1)
- [T5 Torx Screwdriver](#) (1)
- [Tweezers](#) (1)

Step 1 — Remove Back Cover and Loudspeaker



- Use the [Spudger tool](#) to get access to the loudspeaker. **Locate** where the headphone jack is, then move about one-inch to the right and begin to **gently pry** the back-cover off the phone with the flat end of the Spudger tool. Make sure to **pry apart the entire perimeter** of the back-cover to prevent bending/cracking of the plastic.
- Tools used: [Spudger tool](#) (used as a wedge to pry off the back-cover and loudspeaker.)

Step 2

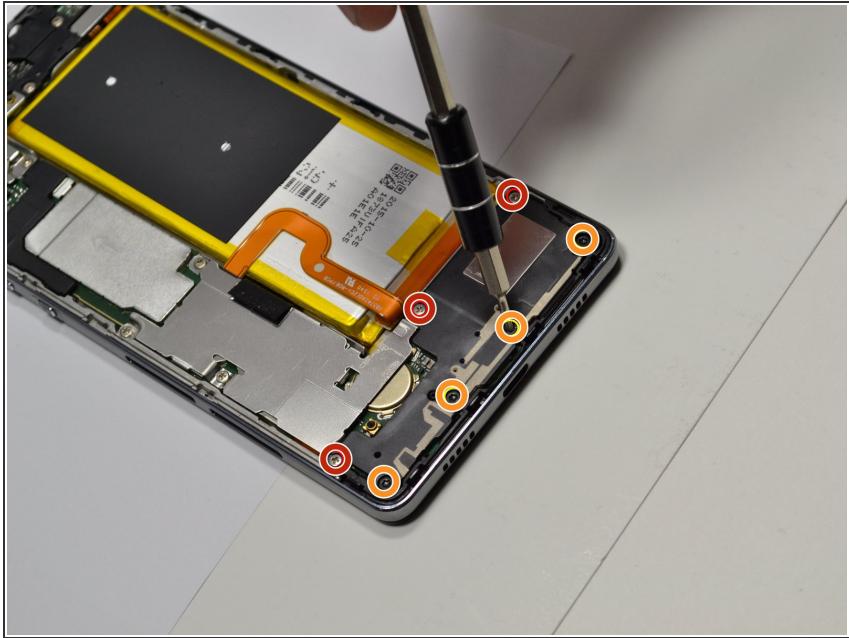


- Remove three silver Phillips 000 screws.
- Remove three T5 Torx screws.

Step 3



- **Gently**, use the flat end of the [Spudger tool](#), or a metal opening tool to **lift** and **remove** the loudspeaker from the phone. The loudspeaker is the entire portion of the phone where the screws were extracted.

Step 4 — Earpiece Speaker

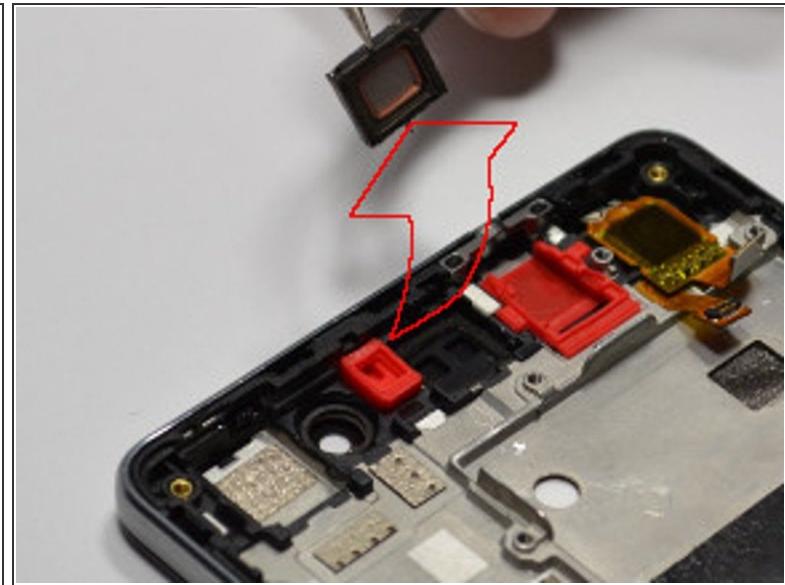

- Use Tweezers to grip earpiece speaker and lift out from phone. Insert replacement earpiece speaker into slot.

To reassemble your device, follow Teardown Guide steps 12, 6, 5, 4, 3, 2, 1 in that order.