




Huawei P8 Lite Earpiece Speaker Replacement

This guide will explain how to replace the Earpiece Speaker for the Huawei P8 Lite.

Written By: Adam Jansen

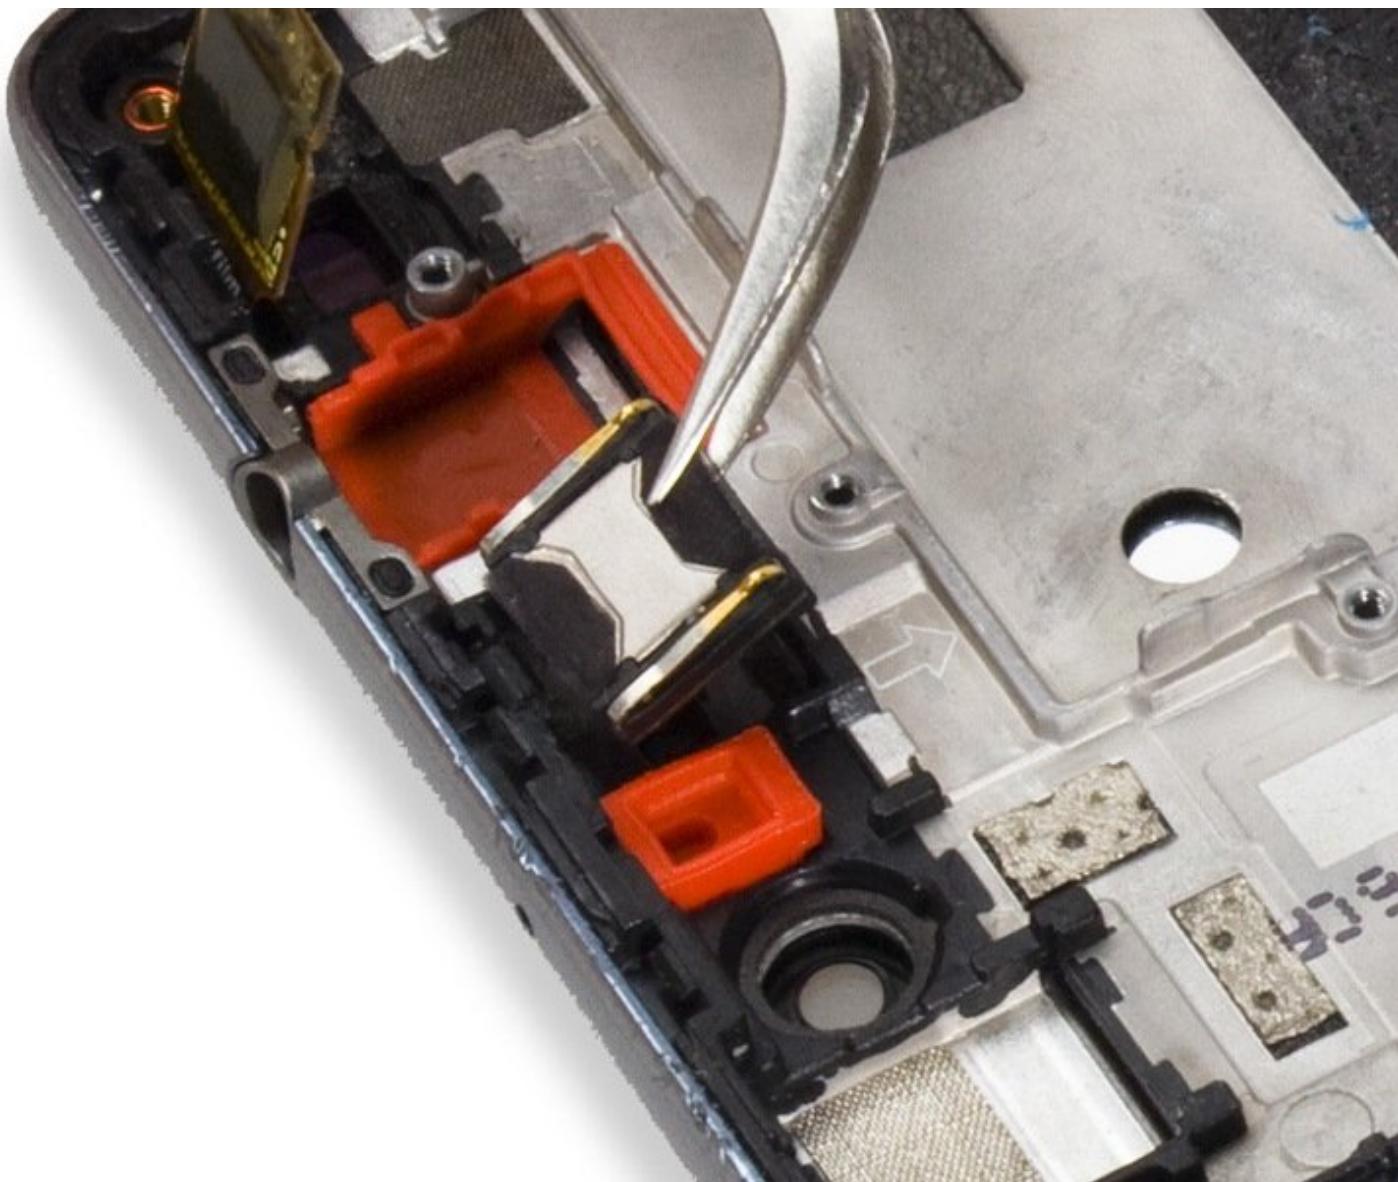

INTRODUCTION

This guide will explain how to replace the Earpiece Speaker for the Huawei P8 Lite.

TOOLS:

- [64 Bit Driver Kit \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [Phillips #0 Screwdriver \(1\)](#)
- [Phillips #000 Screwdriver \(1\)](#)
- [T5 Torx Screwdriver \(1\)](#)
- [Tweezers \(1\)](#)
- [Spudger \(1\)](#)

Step 1 — Back Cover



- Use an Opening Tool and start to lever up the back cover of your Huawei P8 Lite at the bottom of your phone.

Step 2




- There are clips around the whole mid frame, holding down the back cover. Open all of them with the Opening Tool.
 - When all clips are open, remove the back cover from the rest of the phone.
- (i)** If the back cover doesn't come freely, there are probably some additional clips that need to be disconnected.

Step 3 — Loudspeaker



- Use a tweezer to remove the warranty sticker which sits on a screw in the bottom right of your phone.

Step 4

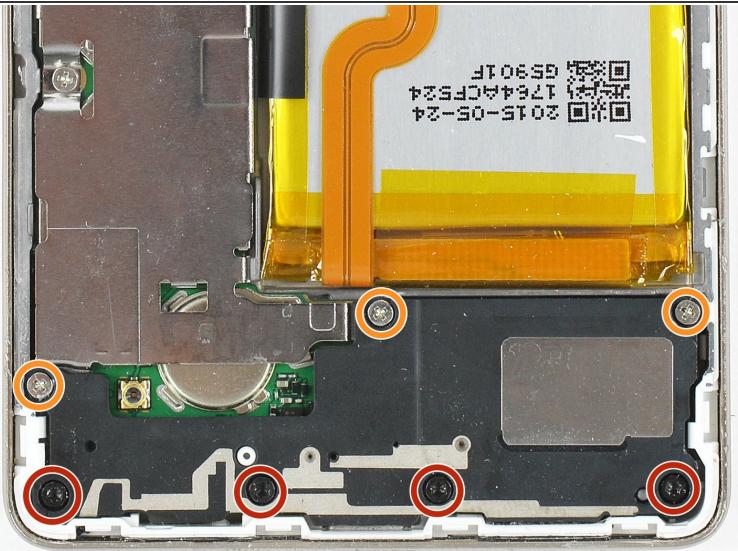


- Remove the 4 black Torx T5 screws which hold down the lower part of the loudspeaker.
- Remove the three silver Phillips #00 screws which hold down the upper part of the loudspeaker.

Step 5



- Remove the loudspeaker carefully.

Step 6 — Motherboard

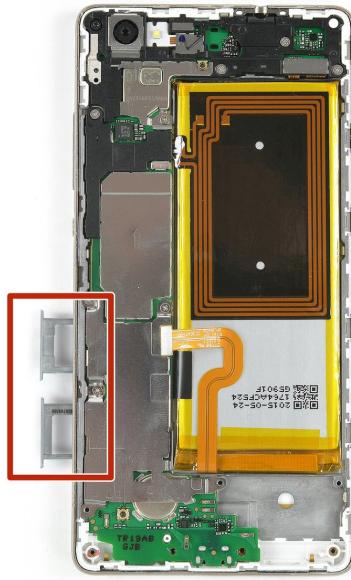

- Continue by removing the SIM and SD card trays on the side of the device.

Step 7





- Remove the two Torx T5 screws. One may be cover with a liquid indicator.
 - Remove the five Phillips #000 screws.
 - Take away both securing brackets covering the motherboard.
- i** If your phone has an NFC antenna, taking away the cover will automatically free its flex connector from the motherboard.

Step 8




- Remove the three Phillips #000 screws on the silver panel.

Step 9

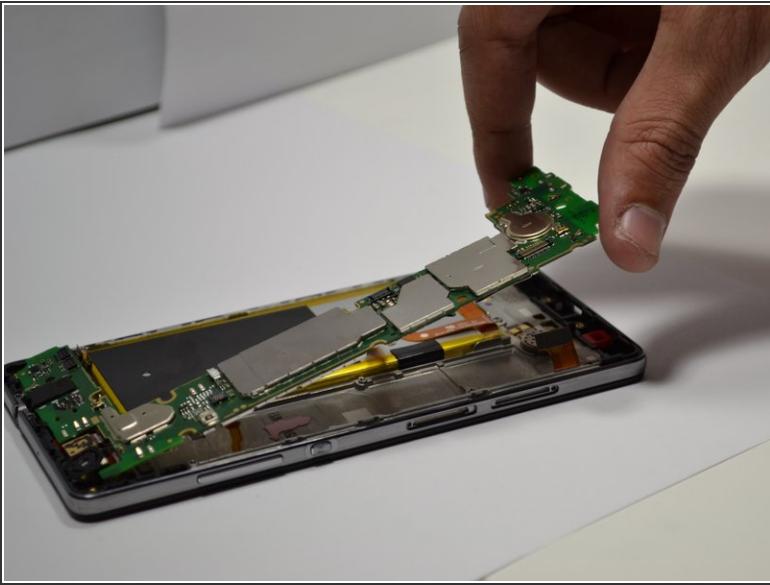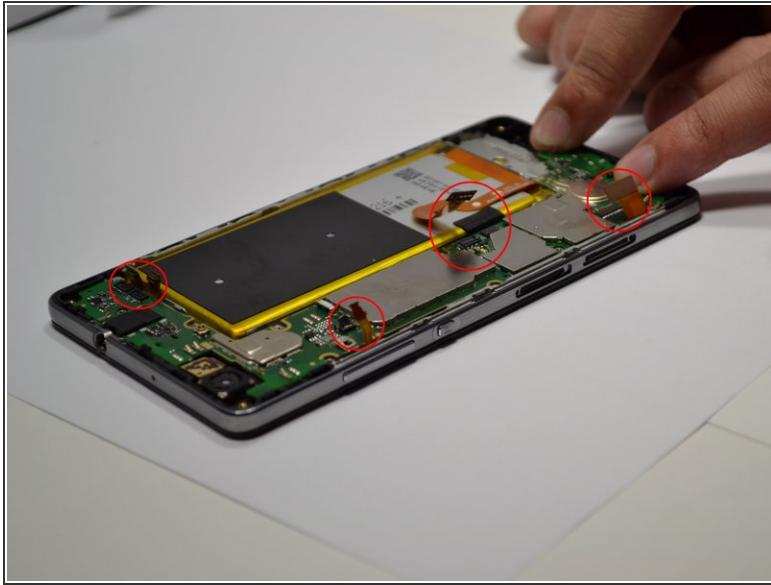

- Carefully separate the four connectors holding the motherboard in place.
- Remove the motherboard from the device.

Step 10 — Earpiece Speaker

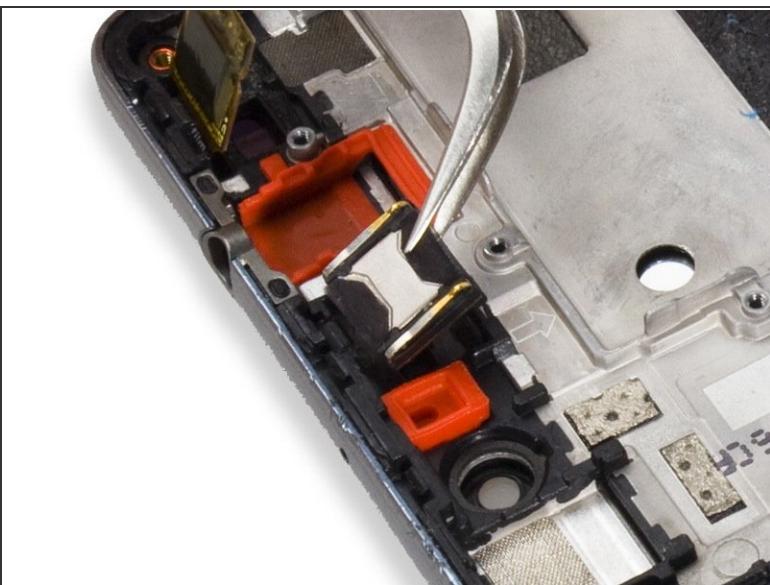

- Using the [Tweezers](#), carefully remove the Earpiece Speaker.
- Insert the new Earpiece Speaker and follow these steps in reverse order to reassemble the device.

To reassemble your device, follow these instructions in reverse order.