



Huawei P8 Lite Loudspeaker Replacement

Guide to safe replacement of the P8 Lite loudspeaker.

Written By: Brayden Mann



INTRODUCTION

This guide will instruct step-by-step how to disassemble the P8 Lite and replace the loudspeaker. A [breakdown kit](#) and replacement loudspeaker will be required. Review the device [Teardown Guide](#) to get started.

TOOLS:


- [Phillips #000 Screwdriver](#) (1)
- [Spudger](#) (1)
- [T5 Torx Screwdriver](#) (1)
- [Tweezers](#) (1)
- [SIM Card Eject Tool](#) (1)
- [64 Piece Bit Driver Kit](#) (1)

Step 1 — Remove Back Cover and Loudspeaker



- Use the [Spudger tool](#) to get access to the loudspeaker. **Locate** where the headphone jack is, then move about one-inch to the right and begin to **gently pry** the back-cover off the phone with the flat end of the Spudger tool. Make sure to **pry apart the entire perimeter** of the back-cover to prevent bending/cracking of the plastic.
- Tools used: [Spudger tool](#) (used as a wedge to pry off the back-cover and loudspeaker.)

Step 2

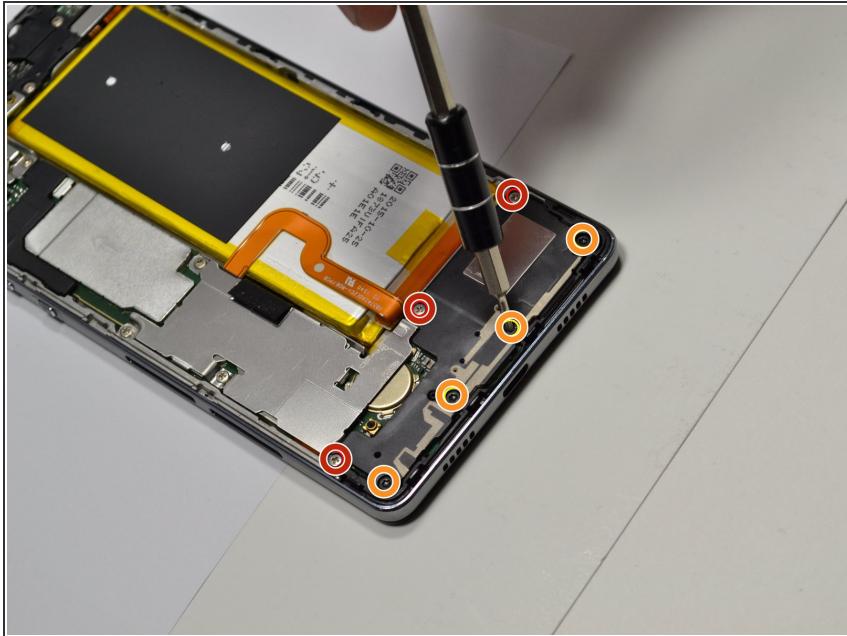

- Remove three silver Phillips 000 screws.
- Remove three T5 Torx screws.

Step 3



- **Gently**, use the flat end of the [Spudger tool](#), or a metal opening tool to **lift** and **remove** the loudspeaker from the phone. The loudspeaker is the entire portion of the phone where the screws were extracted.

To reassemble your device, follow Teardown Guide steps 4, 3, 2, 1 in that order.