




Infinity v2 10.1 Camera Replacement

In this replacement guide, we will be showing you how to replace the broken camera in the Infinity v2 10.1.

Written By: sammytarbokas

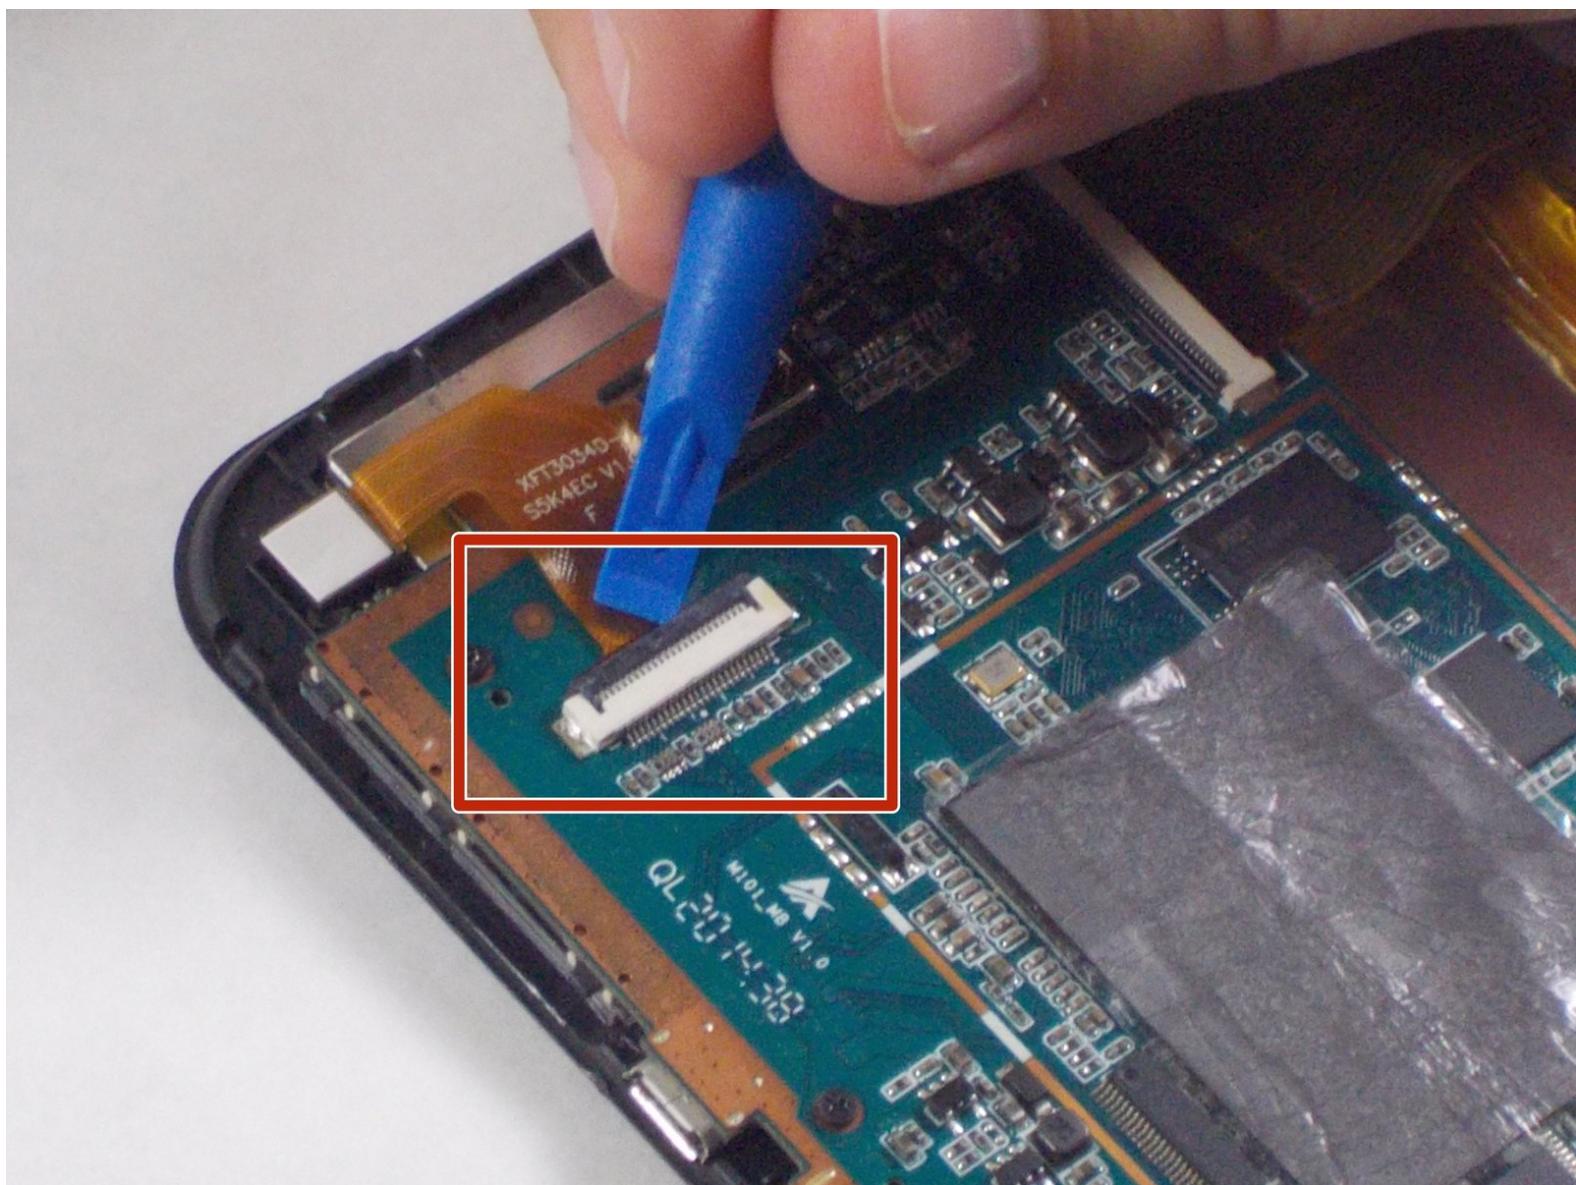

INTRODUCTION

The Infinity v2 10.1 camera should be replaced when it no longer turns on, the lens is cracked or water damaged, or when it takes a distorted image. Replacing the camera is a simple process, without any previous repair experience required. You will simply disconnect the camera from the motherboard, which you can do using your fingers. All you will need is a tool to open the device and a new camera to replace with the old one.

TOOLS:

- [iFixit Opening Tools \(1\)](#)

Step 1 — Back Case



- Slightly pry open one corner of the device by using your finger nail to separate the screen from the back case.
- Use an opening tool to carefully detach the back case from the tablet. Start by inserting the tool where your fingernail opened a gap, and work around all four sides of the device.

(i) There will be a slight click noise as you free each tab.

- Once the case is completely free, carefully lift it and place it face up on the workstation, being cautious not to damage the speaker wires connecting the two halves.


Step 2



- Remove the speakers from the case by gently lifting them up and out of their slots.


This document was generated on 2020-01-23 12:42:49 AM (MST).

Step 3 — Camera

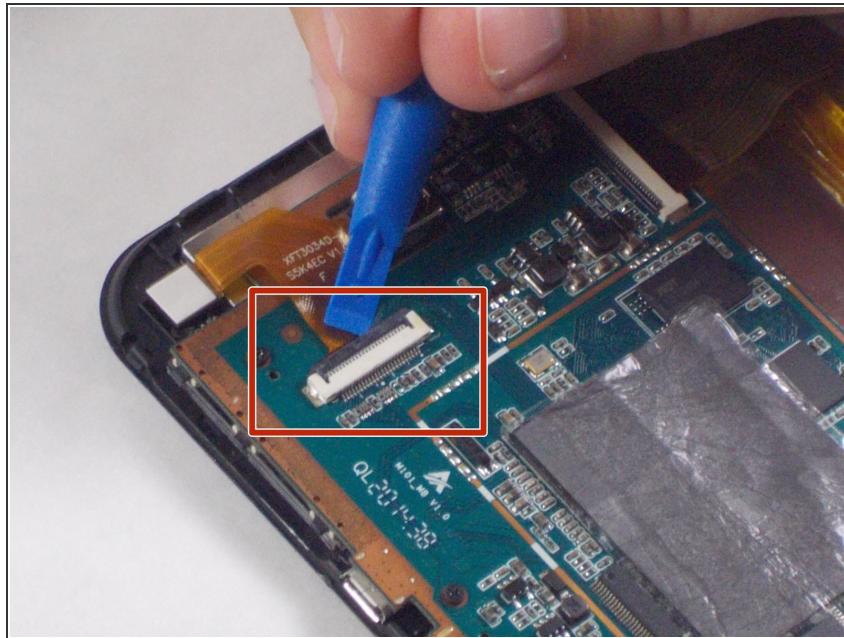

- Use your thumb or opening tool to lift the black connector holding in the ribbon cable.

Step 4

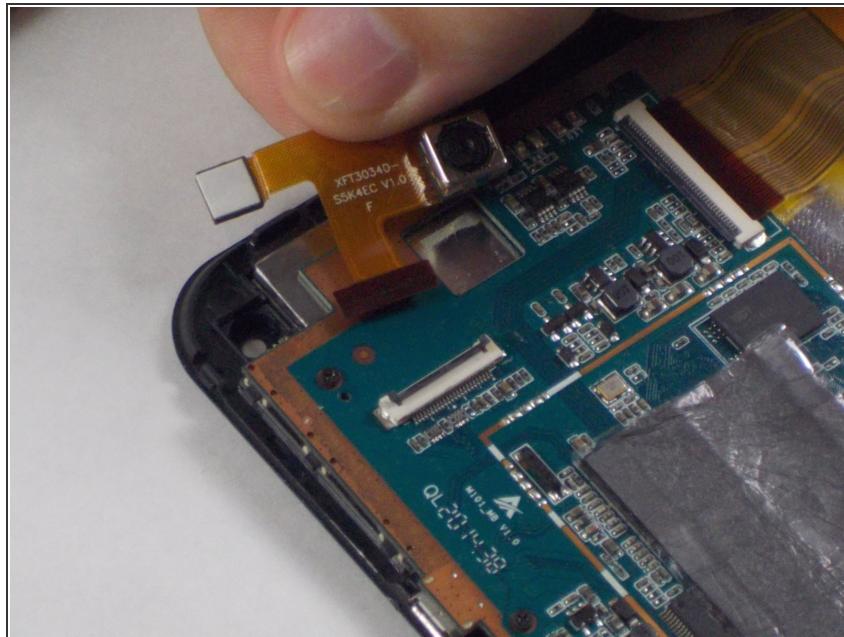

- Remove the camera by gently picking it up and pulling it free from the connector.

 Avoid touching the lens of either camera.

To reassemble your device, follow these instructions in reverse order.