



Inspiron 7359 2-in-1 Screen Replacement

This guide shows how to replace the screen for an Inspiron 7359 2-in1 laptop.

Written By: Dominique



INTRODUCTION

This guide will help you replace the touchscreen LCD. Be extremely careful while replacing the touchscreen LCD.

TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [Anti-Static Wrist Strap](#) (1)
- [iFixit Precision Bit Driver](#) (1)
- [Metal Spudger](#) (1)

Step 1 — Disassembling the Inspiron 7359 2-in-1



 Turn off device before starting.

- Turn the laptop upside down with the logo facing the surface of the table.

Step 2




- Use a Phillips #0 screwdriver to remove the ten 8mm screws from the back case of the laptop.

Step 3



- Use a spudger to separate the back cover from the laptop.
- ⓘ Start from one corner and work your way around the edge of the cover.
- ⚠ Be careful not to bend or crack the back cover.

Step 4

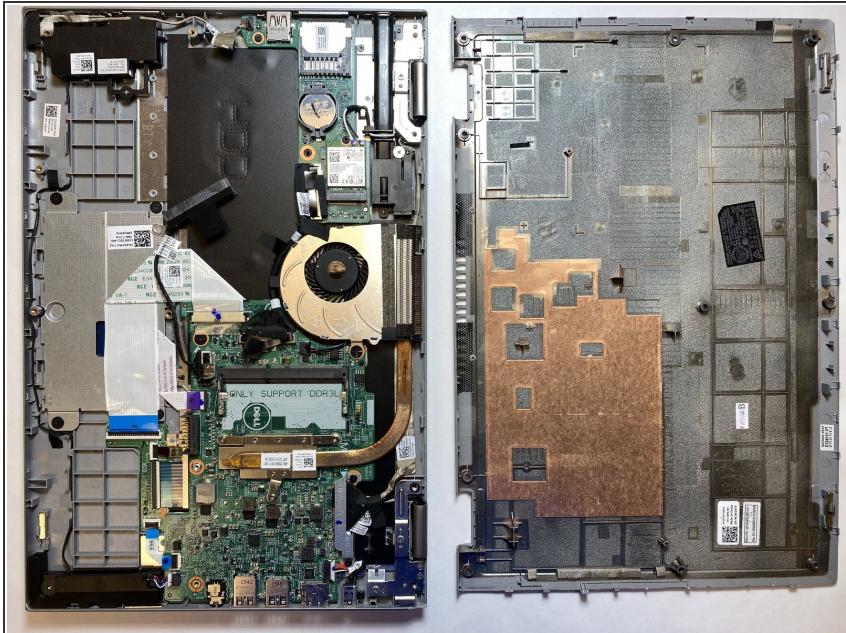

- All hardware components should be exposed.


Step 5 — Screen



- Using a spudger or opening pick, carefully pry in between the screen and the screen backing.


 After opening the LCD Screen, slowly and carefully open the laptop so the front of the screen touches the keyboard.

Step 6

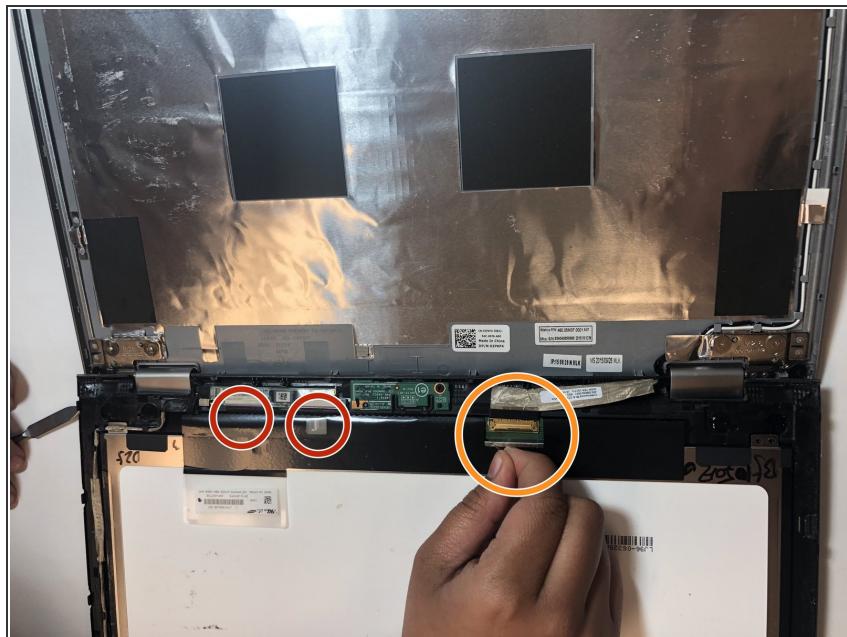

- Slowly peel back the tape that is attached to the screen itself.
- Once the tape is removed, gently disconnect the attached cables.

Step 7

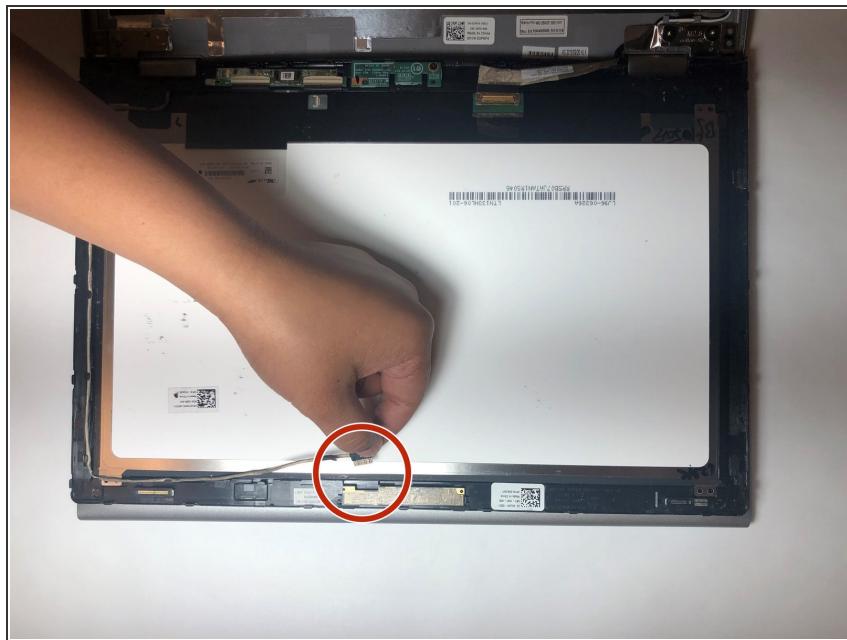

- Carefully disconnect the attached cable.
- Once you remove the attached cable, gently lift up the LCD panel.

To reassemble your device, follow these instructions in reverse order.