



JBL Charge 2 Speakers Replacement

Written By: Mauzor Ilonzo



INTRODUCTION

How to disassemble the JBL Charge 2 for replacing speakers.

TOOLS:

- [Phillips #1 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [Metal Spudger \(1\)](#)

Step 1 — Battery




- Remove the screen cover from the speaker using a metal spudger.

Step 2




- Using a Phillips #1 screwdriver (PH1), remove the (4) four 8mm screws.
- Remove the end cap of the device. Repeat the same process to remove the other end cap.

Step 3

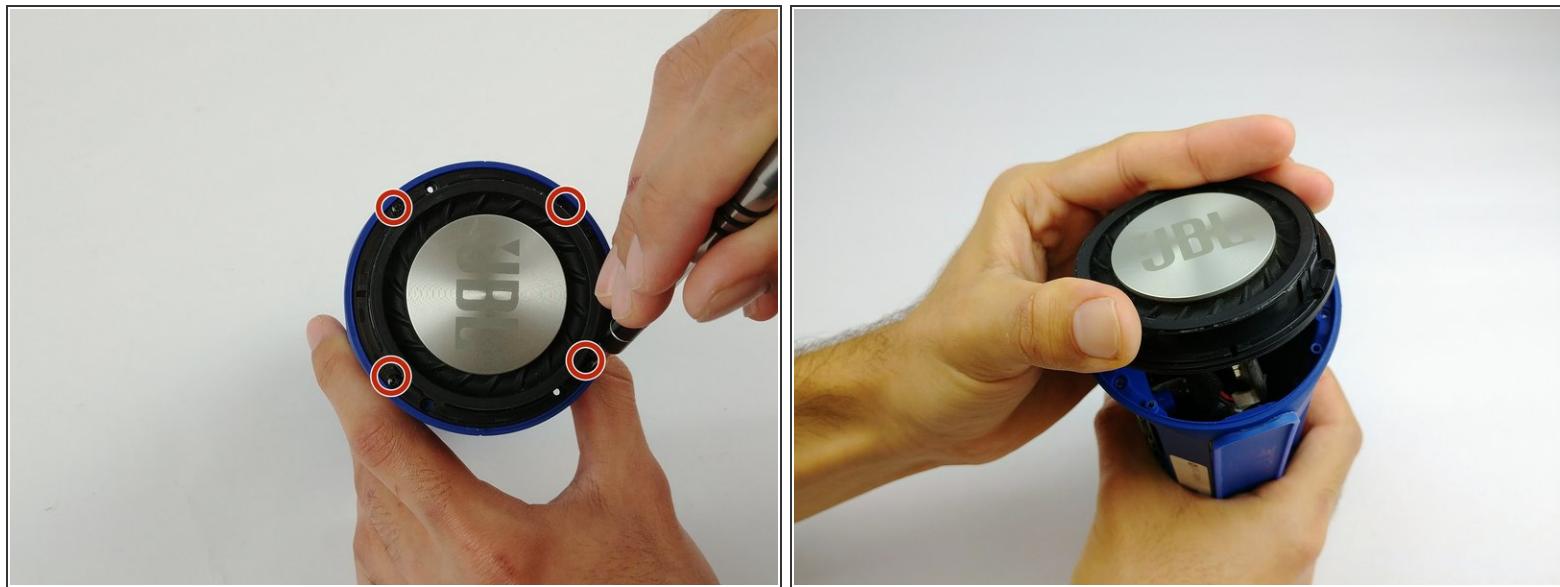

- To remove the end diaphragms, use a Phillips #1 screwdriver (PH1) and remove the (4) four 6mm screws.
- Twist off the end cap and remove them from the device.

Step 4

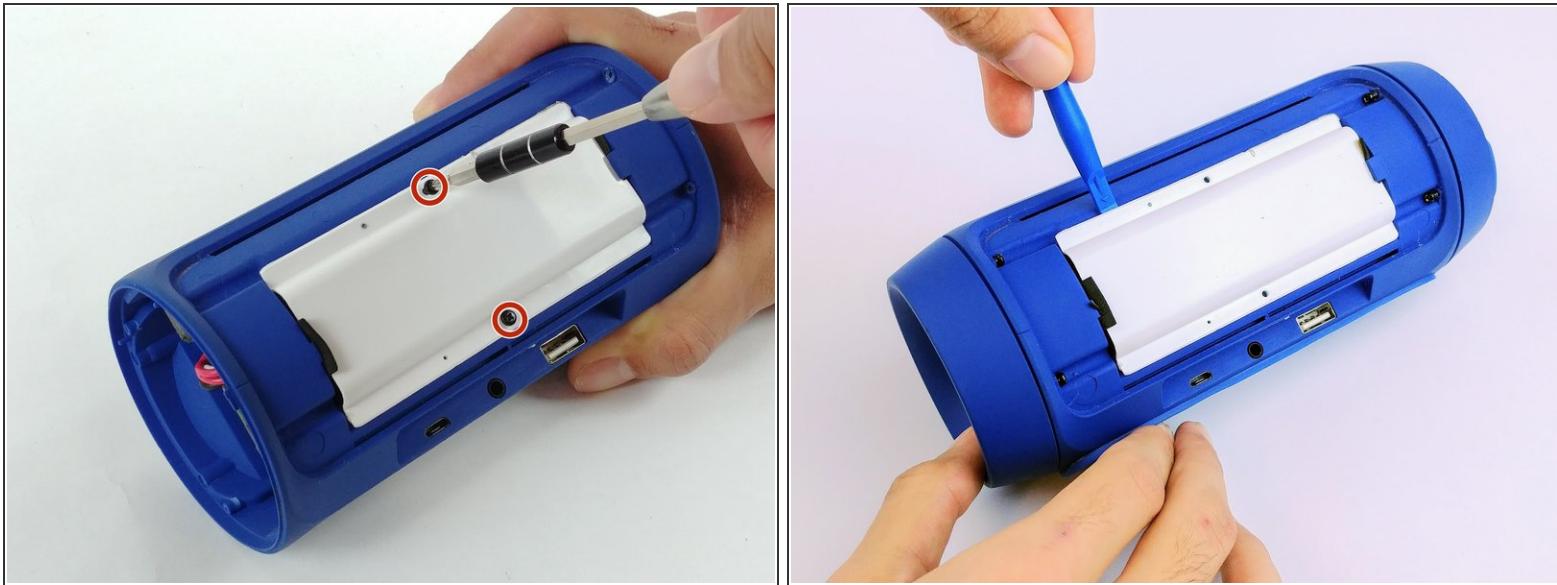

- Use a Phillips #1 screwdriver (PH1) to remove the (2) two screws from the battery cover.
- Pry away the plastic battery cover with a plastic spudger.

Step 5



- Disconnect the battery connector with a plastic opening tool and wiggle the connector free.

Step 6



- Scrape the battery wire sealant off with a plastic opening tool, and ensure it is free of the body of the speaker and wires.
- Slide the battery free.

Step 7 — Speakers



- Remove the opposite screen cover using a metal spudger

Step 8



- Use the Phillips #1 screwdriver (PH1) to remove the (8) eight screws.
- Pull out the speakers from the device.

Step 9



- Disconnect the wiring from the speaker by using the fine tip pry tool.
- Remove the speakers from the device.

To reassemble your device, follow these instructions in reverse order.