



# JBL Flip 3 Speaker Replacement

JBL Flip 3 Speaker Replacement

Written By: Faizan Naveed



 **TOOLS:**

- [Pry Bar \(1\)](#)
- [Phillips #00 Screwdriver \(1\)](#)

## Step 1 — Removing Speaker Grill Part 1



- Using a pry opening tool, pry into the speaker grill covering as seen in the photos.

## Step 2 — Removing Speaker Grill Part 2



- Continue to pry open the grill all the way around until it can be removed from the unit itself as seen in the pictures.

## Step 3 — Remove Speaker Screws





- Remove all 8 speaker screws using a Philips 00 screwdriver.

## Step 4 — Remove Speaker from Housing



- Using a pry tool, remove speakers from housing as seen in the picture.

## Step 5 — Remove Speaker Connection

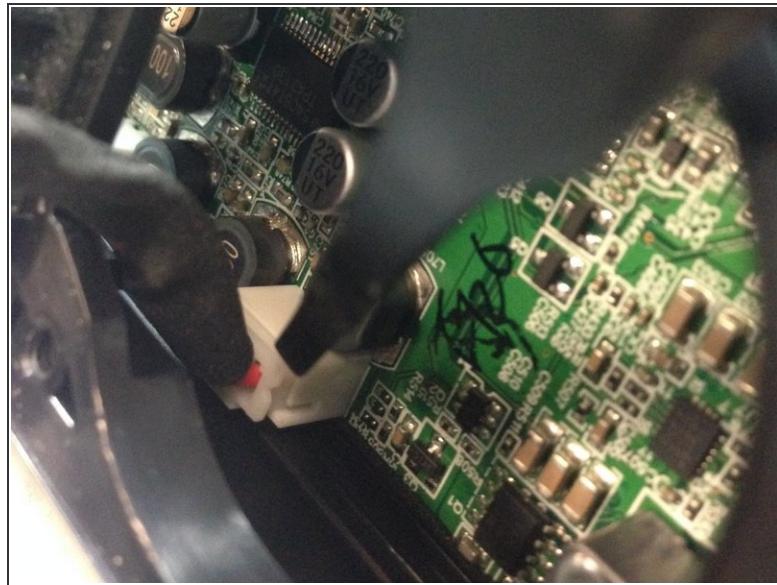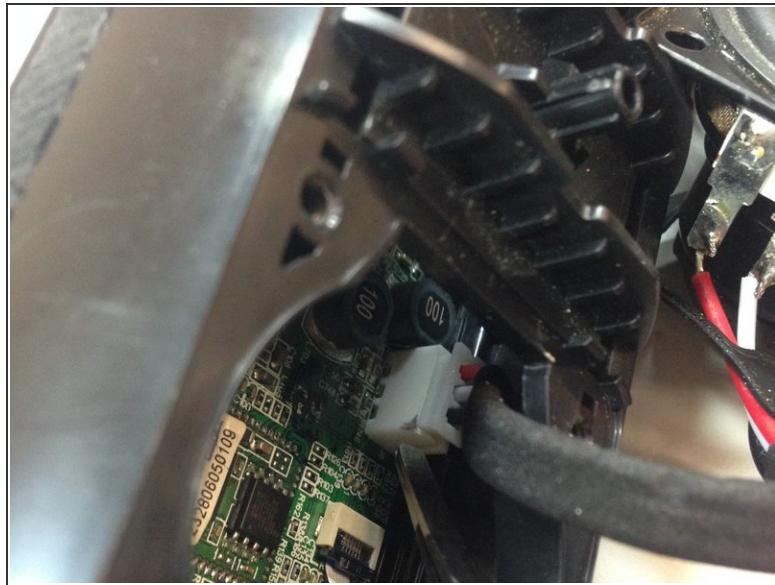

- Using tweezers, carefully remove both side speakers from the motherboard as shown in the pictures.

To reassemble your device, follow these instructions in reverse order.