




Jabra Freeway Battery Replacement

In this guide you will be replacing the battery of the Jabra Freeway.

Written By: Alec Wilson

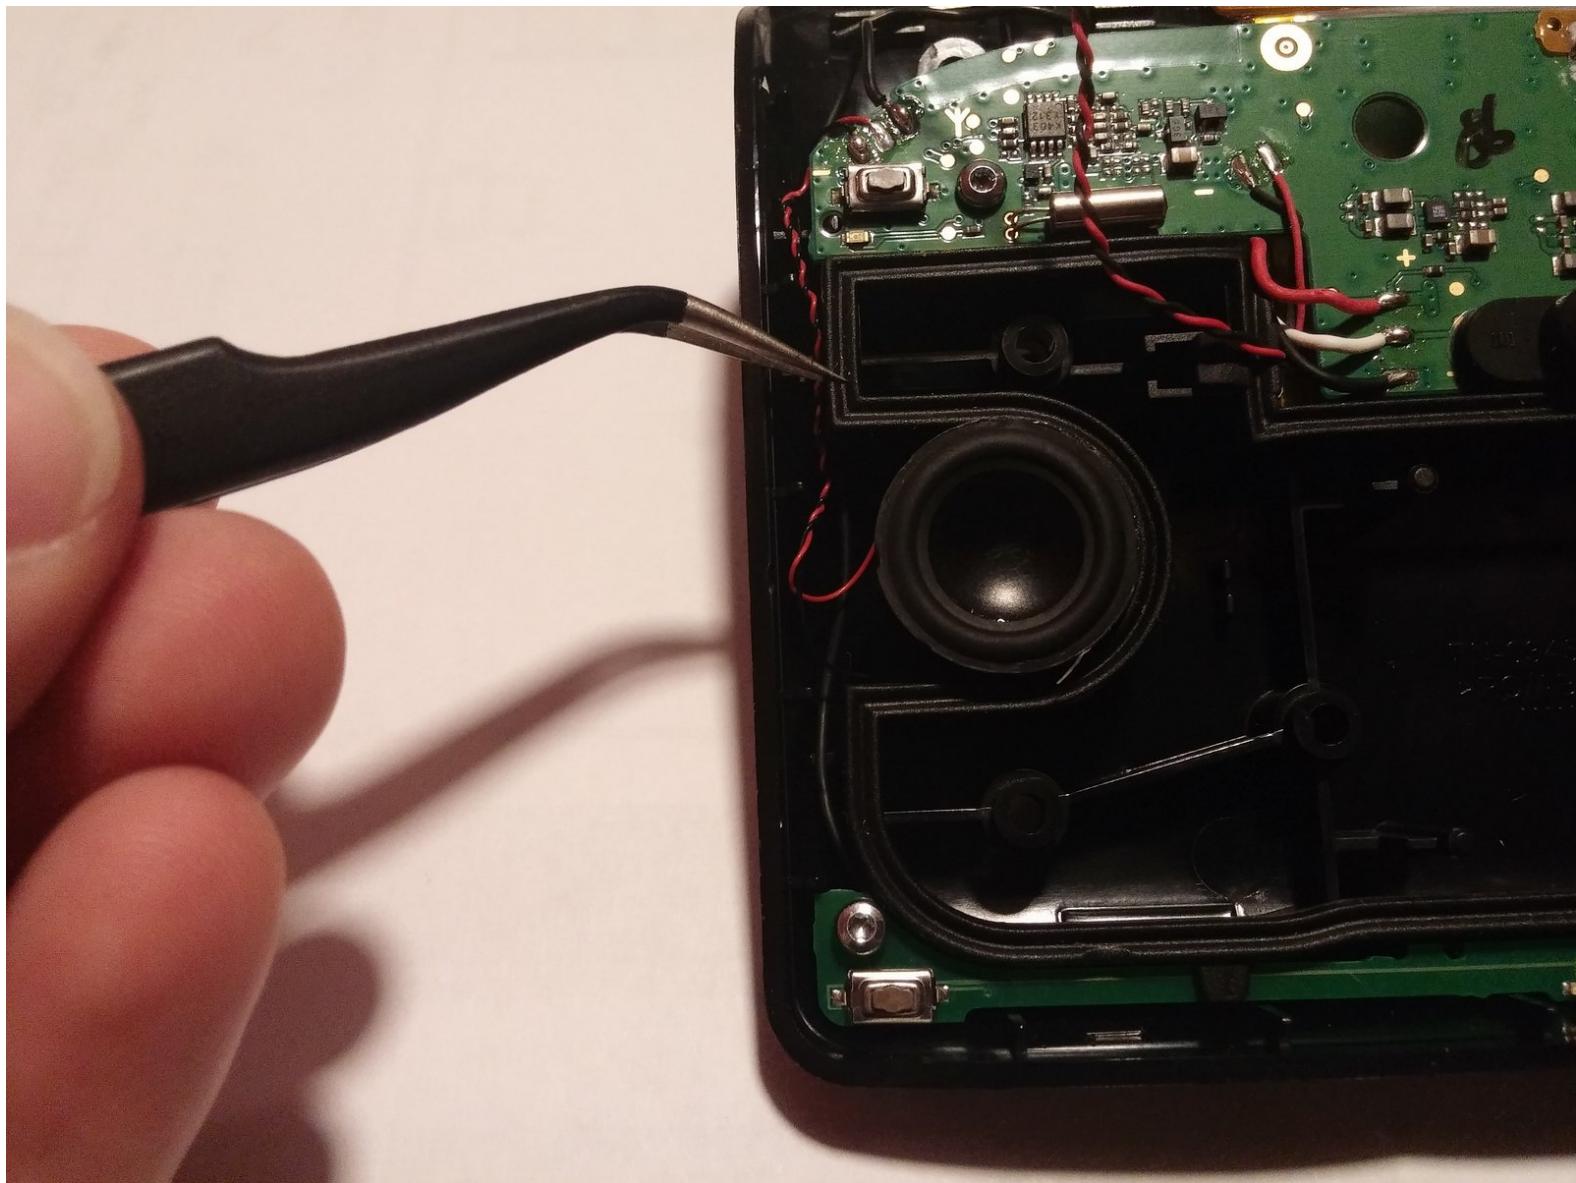

INTRODUCTION

This guide will show you how to replace the battery on the Freeway.

TOOLS:

- [Spudger \(1\)](#)
- [T9 Torx Screwdriver \(1\)](#)
- [Soldering Iron \(1\)](#)
- [T6 Torx Screwdriver \(1\)](#)
- [Tweezers \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

Step 1 — Front Panel



⚠ Turn off the device before proceeding. Failure to do so may result in device damage or injury to oneself.

- Remove the rubber pads from the bottom of the device using the spudger.

Step 2



- Remove the eight 6mm T9 screws.


(i) Two of these screws are underneath the foam padding. This padding is glued on and will be destroyed in this process. Poking through the foam minimizes the damage to the device.

Step 3




- Gently lift the front panel off of the device and carefully rest it to the side.

Step 4 — Battery

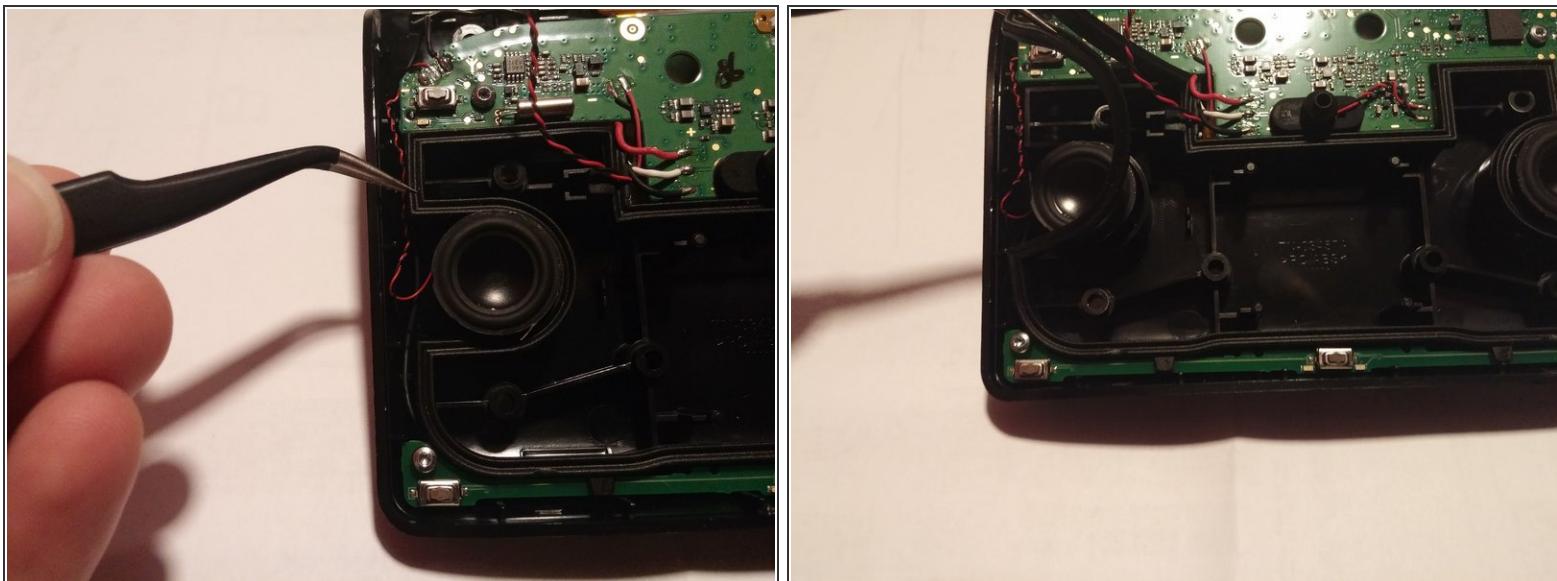


- Remove the rubber gasket using tweezers.

Step 5

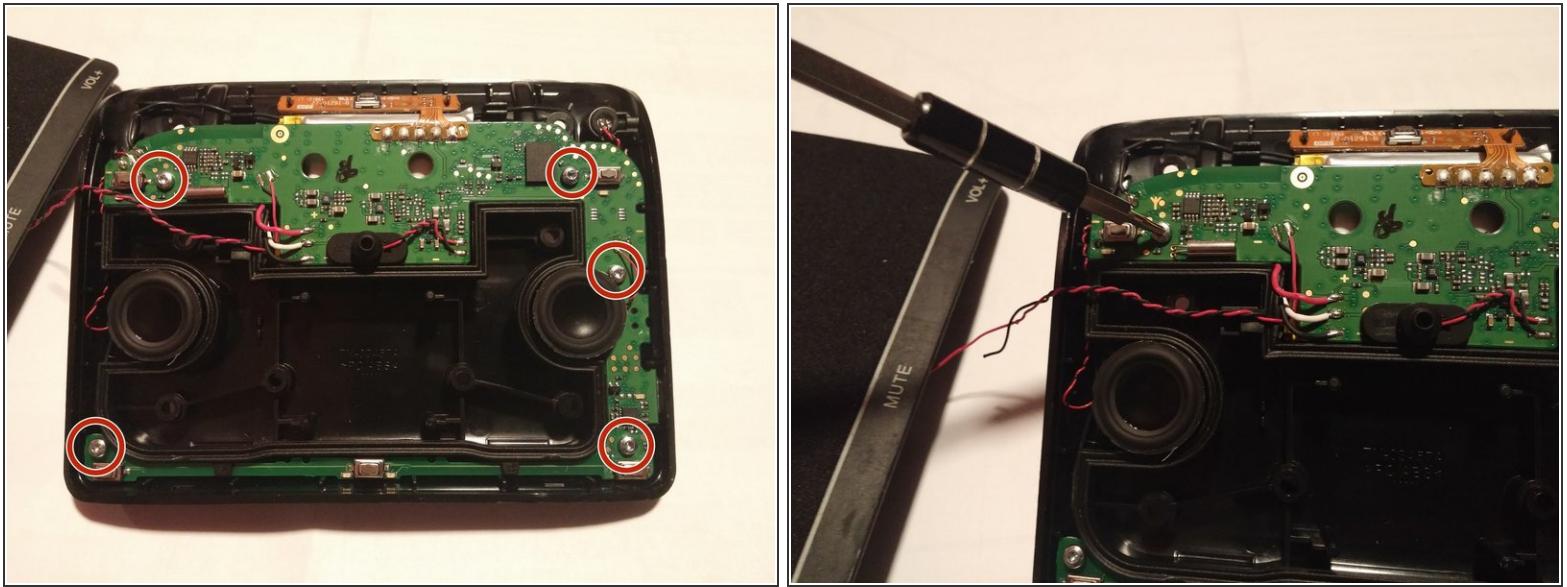


- Remove the five 6mm T6 screws connecting the circuit board to the rear panel.

Step 6

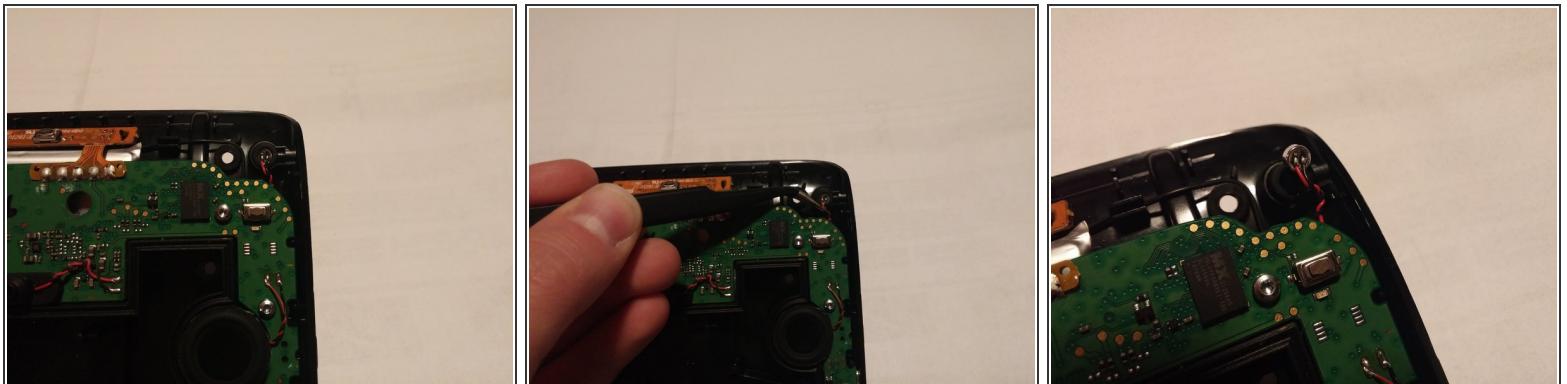


- Remove the microphone from microphone slot.

Step 7

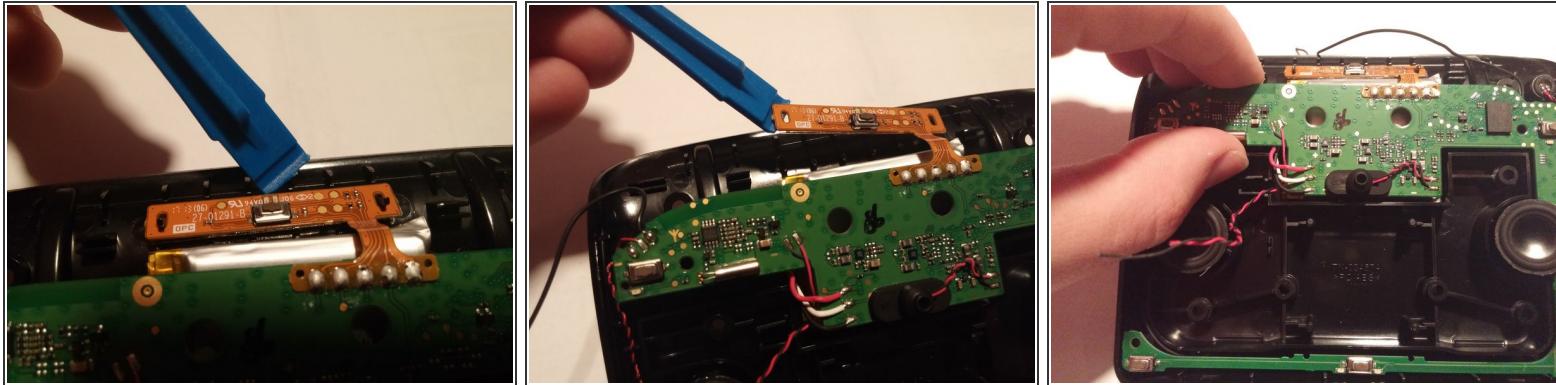

- Carefully use the plastic opening tool to lift the circuit board up.

Step 8

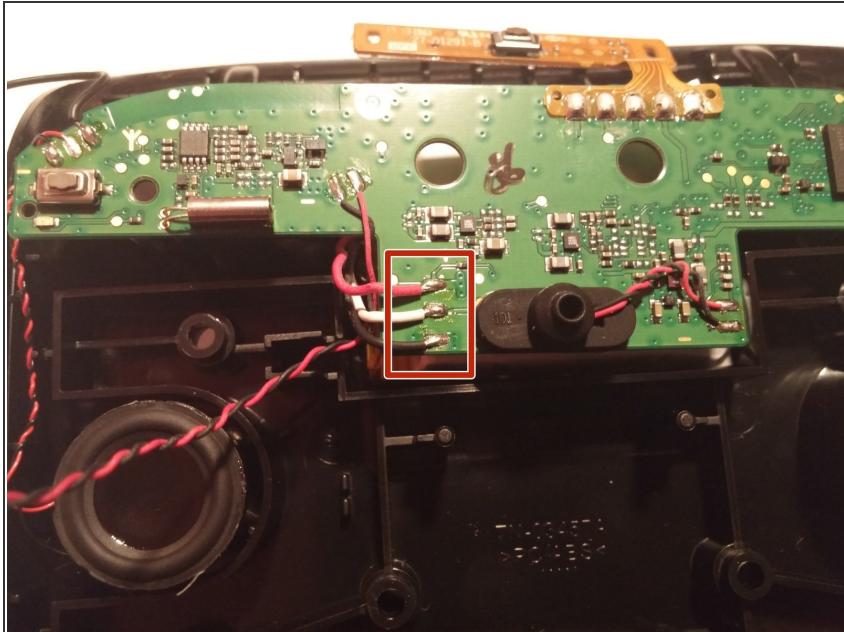

- Desolder the three wires connecting the battery.
- Please refer to the [soldering technique guide](#) for instructions on desoldering and soldering.

To reassemble your device, follow these instructions in reverse order.