



# Jabra Freeway Microphone Replacement

In this guide you will be replacing the microphone of the Jabra Freeway.

Written By: Alec Wilson



## INTRODUCTION

In this guide you will be replacing the microphone of the Jabra Freeway.

### TOOLS:

- [Heavy-Duty Spudger \(1\)](#)
- [T9 Torx Screwdriver \(1\)](#)
- [Tweezers \(1\)](#)
- [Soldering Iron \(1\)](#)
- [Solder \(1\)](#)

## Step 1 — Front Panel



**⚠** Turn off the device before proceeding. Failure to do so may result in device damage or injury to oneself.

- Remove the rubber pads from the bottom of the device using the spudger.

## Step 2



- Remove the eight 6mm T9 screws.


**(i)** Two of these screws are underneath the foam padding. This padding is glued on and will be destroyed in this process. Poking through the foam minimizes the damage to the device.

## Step 3




- Gently lift the front panel off of the device and carefully rest it to the side.

## Step 4 — Microphone

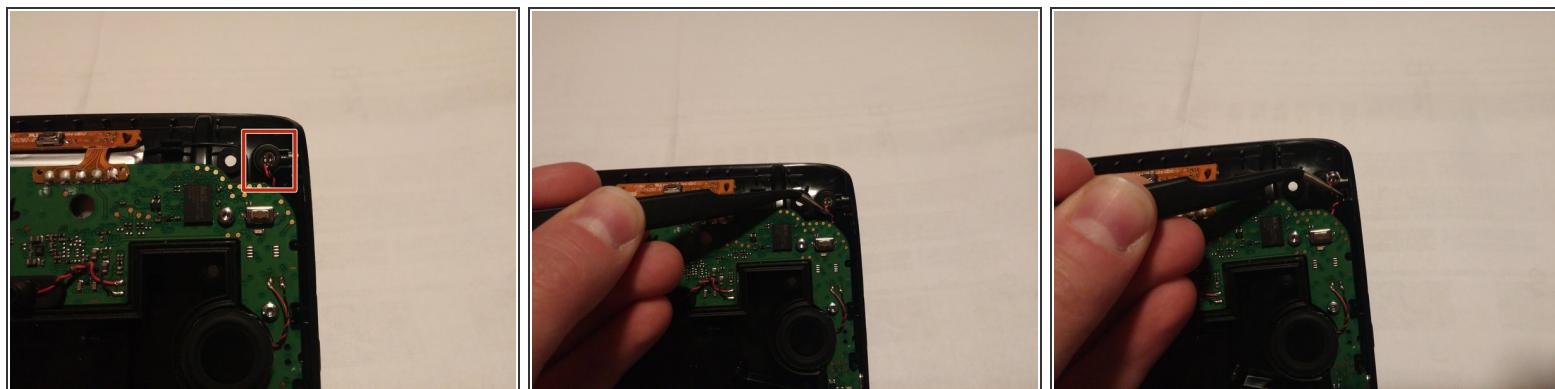

- Remove the microphone from the microphone holding slot.

## Step 5

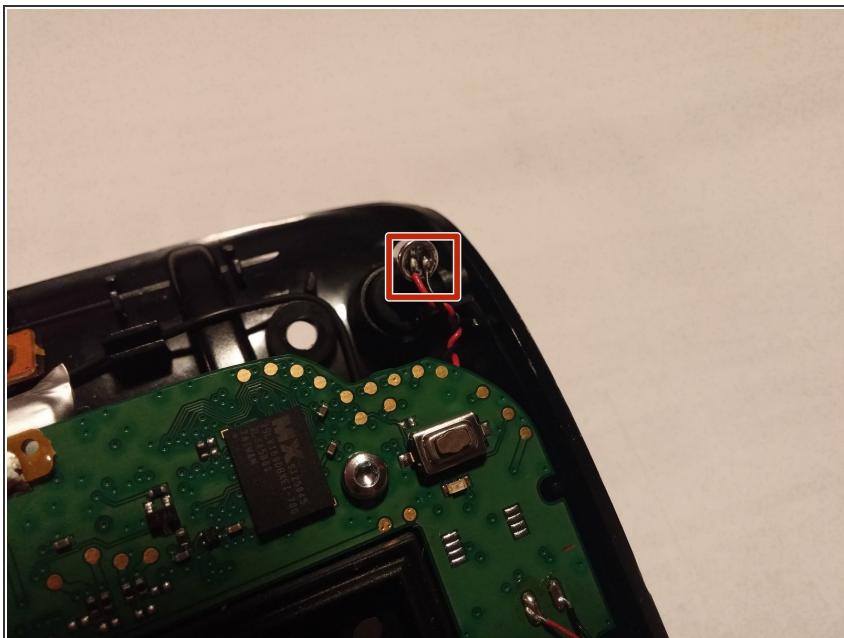

- Desolder the two wires connecting to the microphone.
- Please refer to the [soldering technique guide](#) for instructions on desoldering and soldering.

To reassemble your device, follow these instructions in reverse order.