




Keyboard by why! Replace W253EU (German)

Replace keyboard after damage or to exchange it with a specific model.


Written By: Felice Suglia

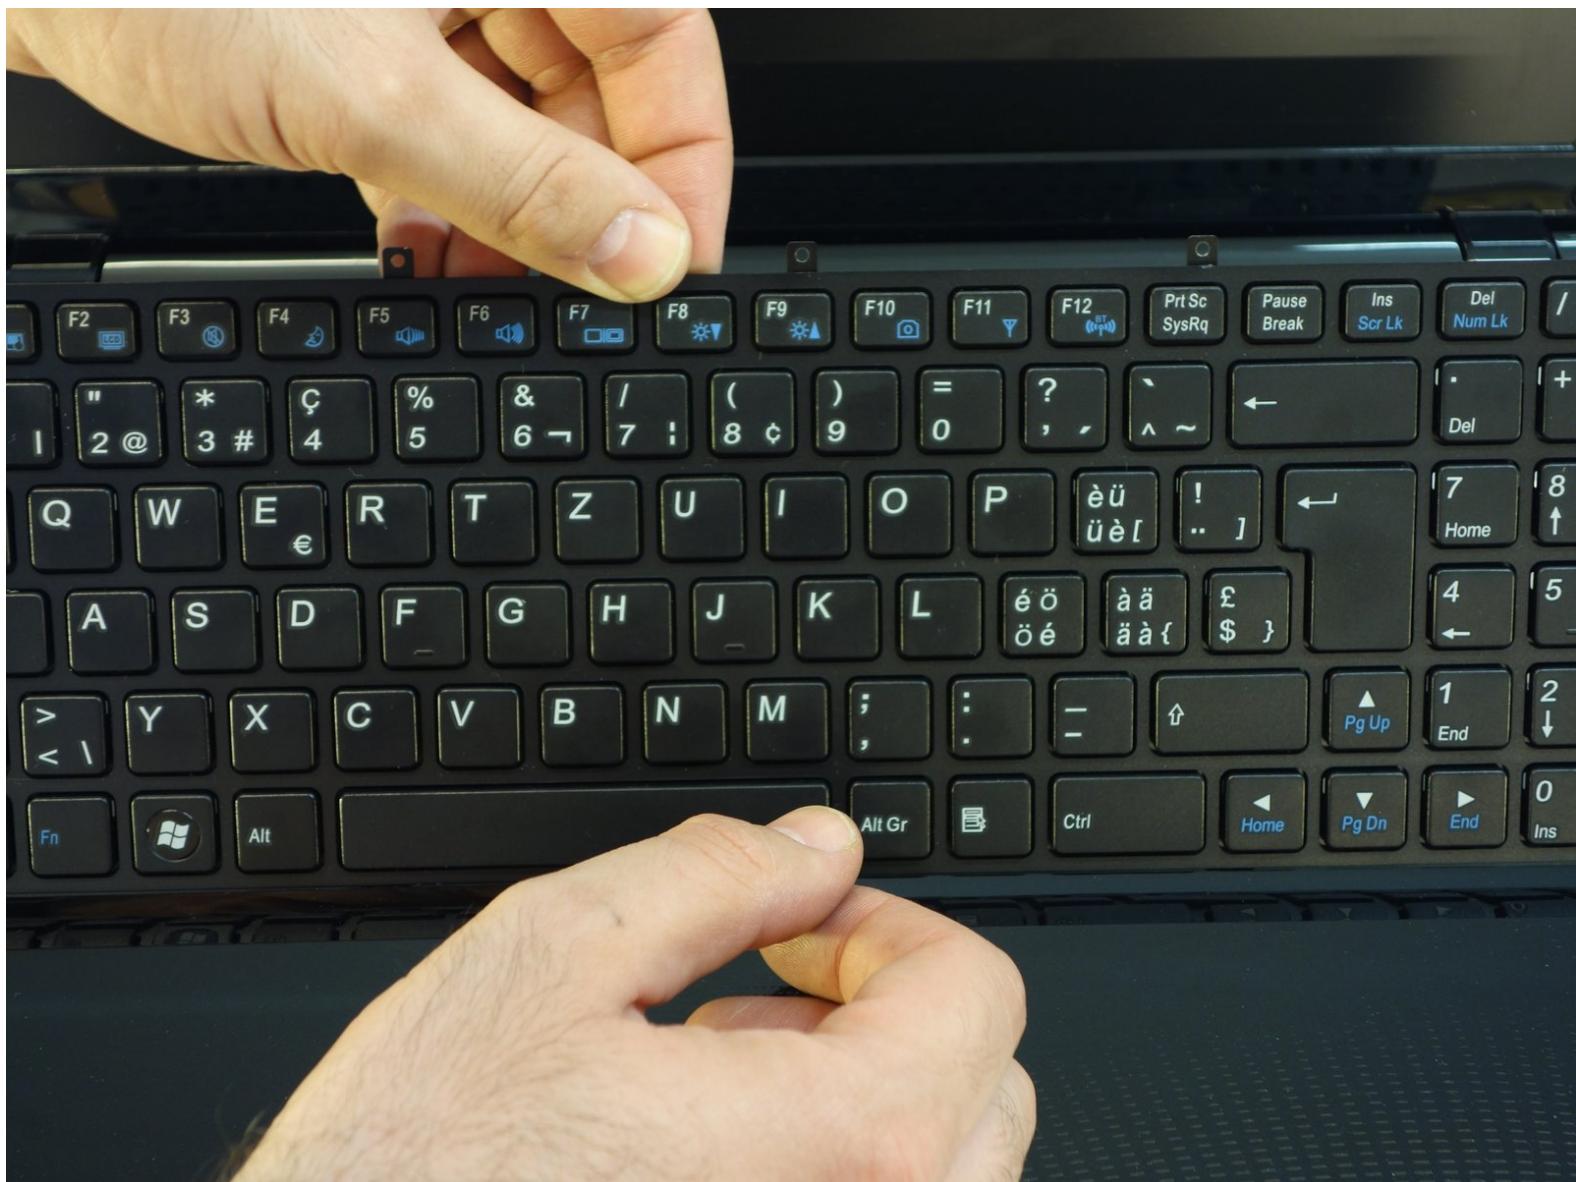

 **TOOLS:**


- Phillips #1 Screwdriver (1)

Step 1 — Battery from why! Remove W253EU

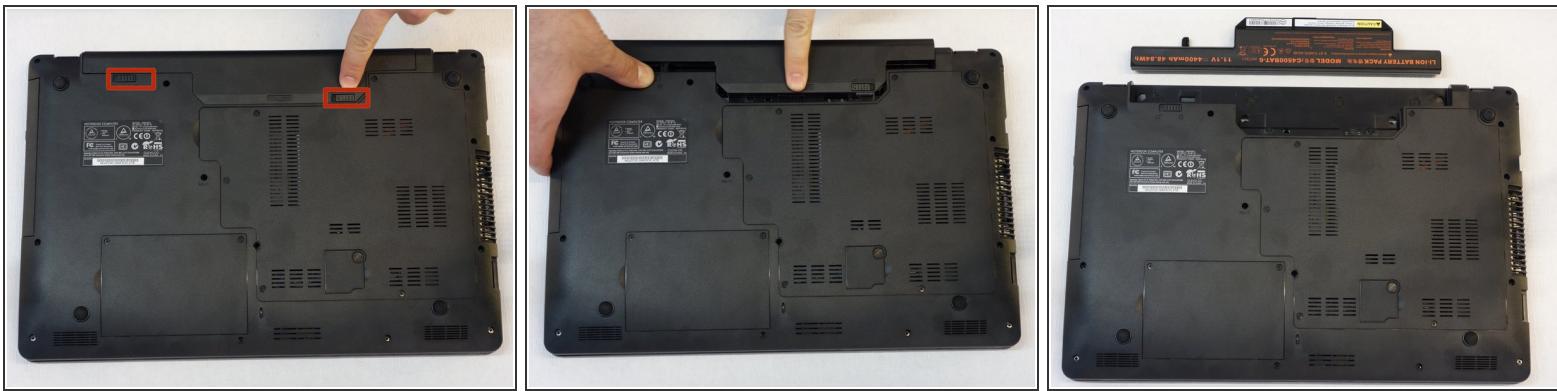


- Turn off the computer.
- *(i)* Before each operation it is important to start with the removal of the accumulator.
- Take the slide unlocked into position, remove the battery.

Step 2 — keyboard

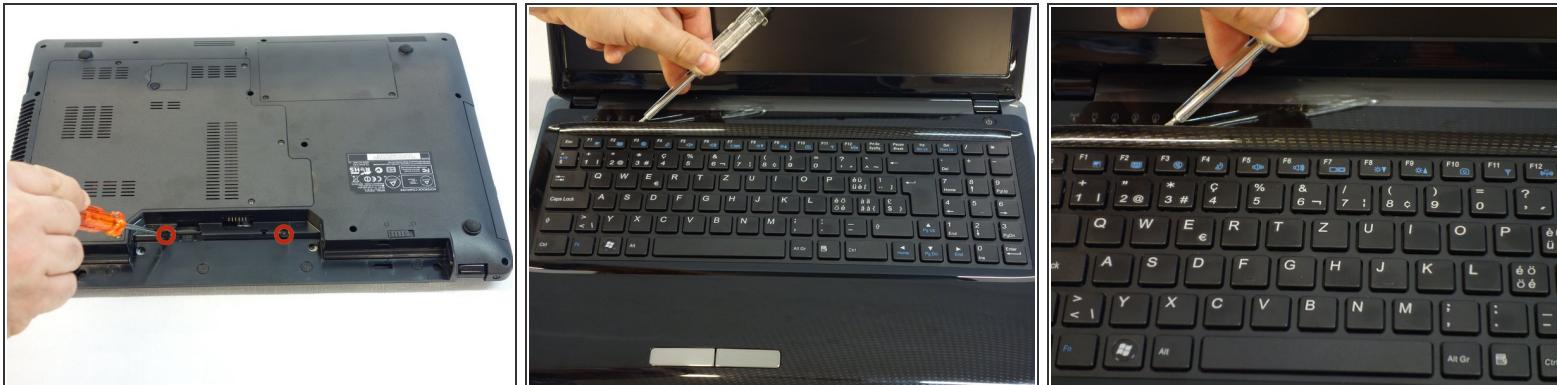


- With the screwdriver Phillips # 1, unscrew the two screws which are located in the slot of the accumulator.
- Insert a standard screwdriver into the slot in the cover above the keyboard.
- Lift the cover with the usual care.

Step 3

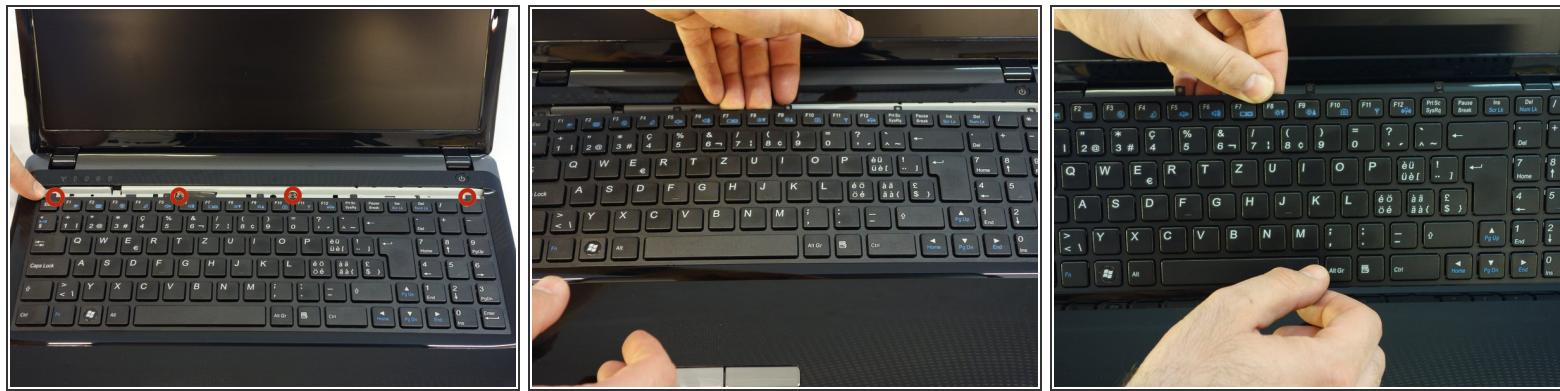

- With the Phillips # 1 screw, remove the four screws securing the keyboard in the upper part.

Step 4

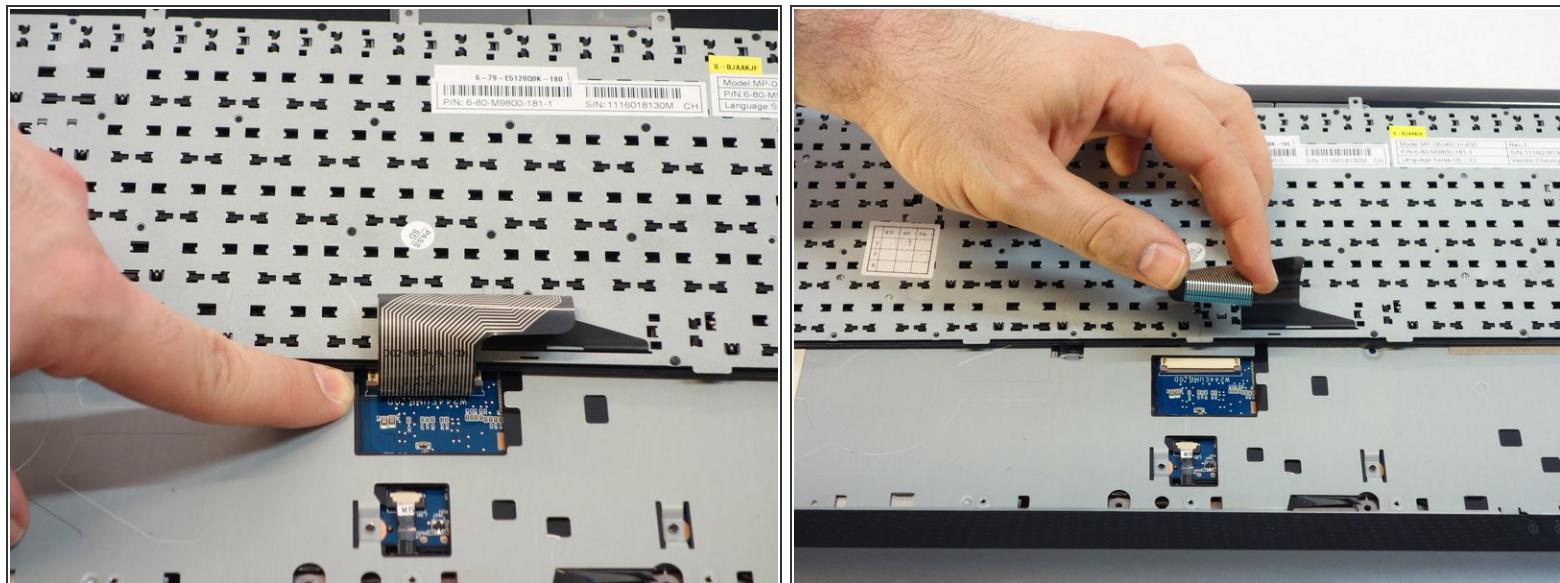

- Now turn the keyboard towards the screen.
- Carefully remove the connection cable in the direction of the plug axis.

For reassembly, follow the instructions in reverse order.