




Kodak EasyShare C913 Capacitor Replacement

How to remove and install the capacitor.

Written By: Alan Galarza

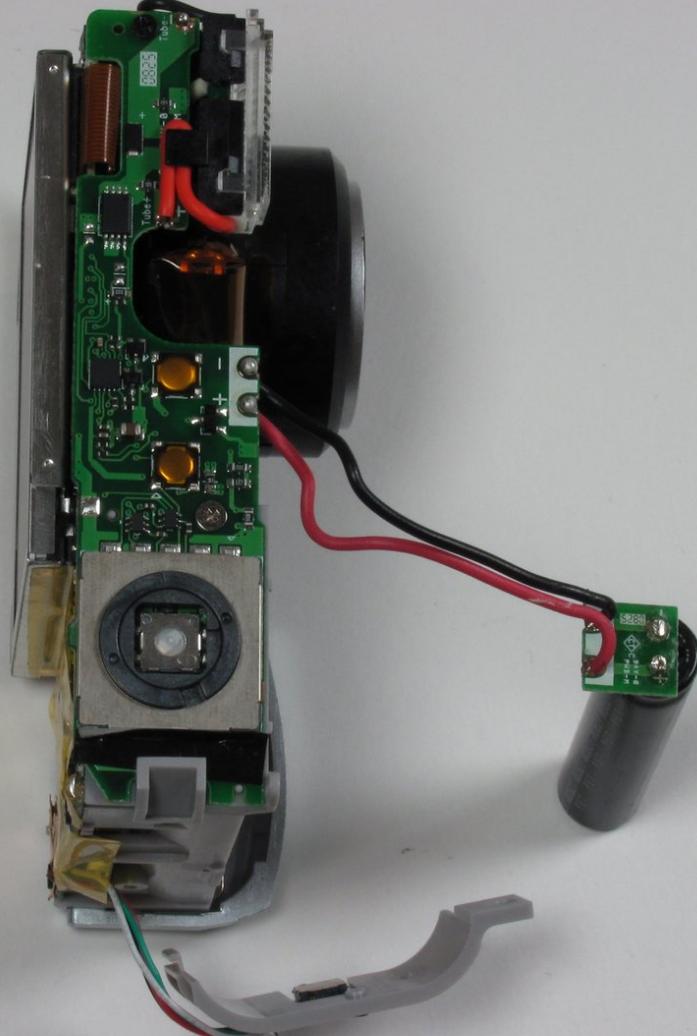

INTRODUCTION

Use this guide to remove the capacitor.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)

Step 1 — Batteries



- Position the camera with the bottom facing up.
- With your finger, slide the battery cover in the direction of open arrow.
- The battery cover will spring open, so be careful to lift it up gently.

Step 2 — Back Case




- Use a Phillips #00 screwdriver to remove the seven 4.5mm screws.
 - There are 2 on the left
 - There are 2 on the right
 - There are 3 on the bottom

Step 3




- Firmly grasp and pull back casing off.

Step 4 — Front Case

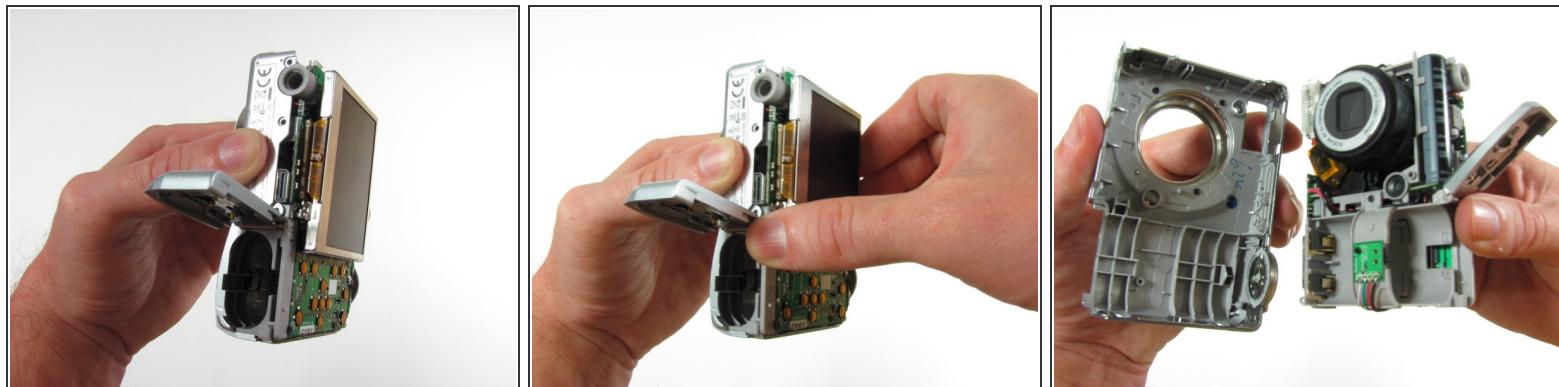

- With battery door open, grasp the front case and remove it from the camera.

Step 5 — Capacitor

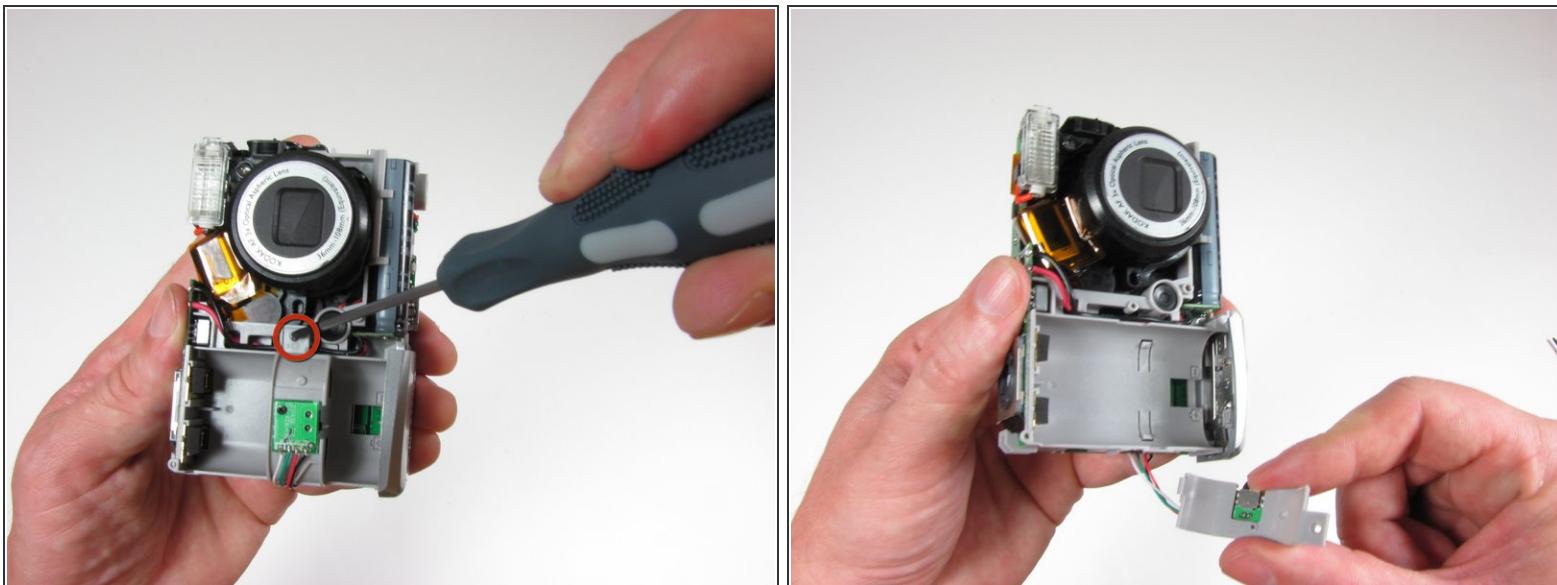


- Orient the camera with the lens facing you.
- Use a Phillips #00 screwdriver to remove the one 2.2mm screw on the plastic bridge.
- Lift the plastic bridge off and place it to the side.

Step 6




 Do not touch the capacitor contact points for any reason. This will result in a severe shock.

Step 7

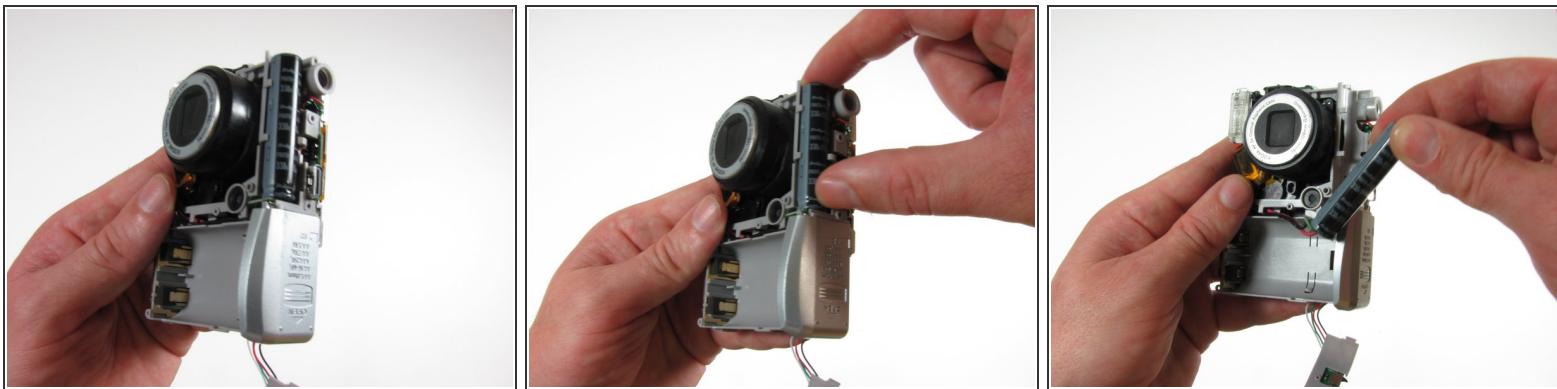

- Grasp the capacitor, carefully remove it from its holder, and place it off to the side.

Step 8

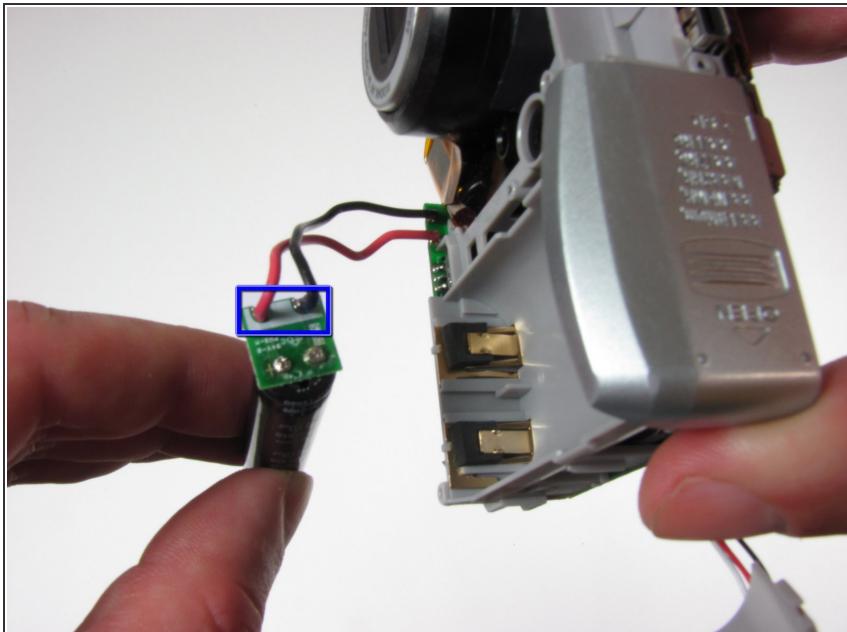

- De-solder the connections at the base of the capacitor

To reassemble your device, follow these instructions in reverse order.