



Koss Porta Pro Speaker Holder Replacement

Replacement of speaker holder from another hoop.

Written By: Дмитрий Кропенко



 **TOOLS:**

- 2.5 mm Flathead Screwdriver (1)
- Flush Wire Cutters (1)
- Precision Utility Knife (1)

 **PARTS:**


- M2.5x7mm (1)
- Double-Sided Tape (1)
- Double-sided Foam Tape (1)

Step 1 — Remove cushion



- Remove cushion using knife.

Step 2 — Remove comfortZone label

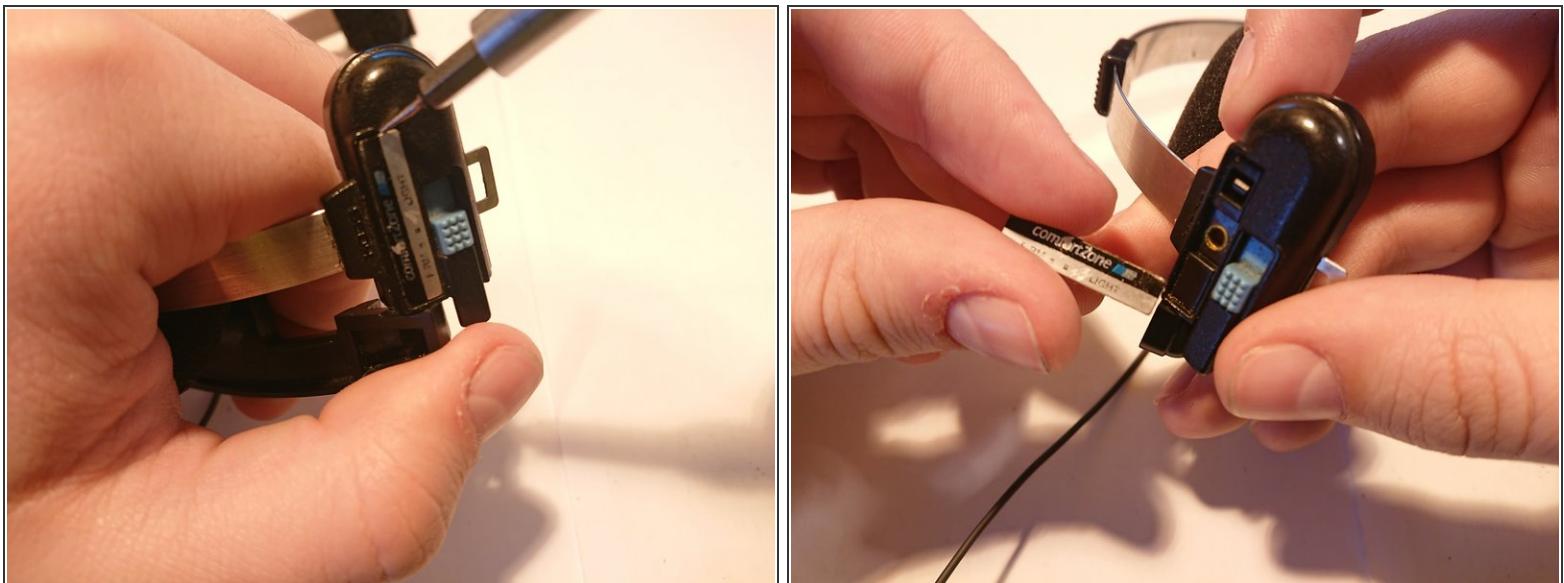

- Remove label using flat screwdriver.

Step 3 — Remove clip



- Use screwdriver to start bending edges of clip.
- Continue bending with pliers or cutters.
- Push clip with screwdriver and pull with cutters from another side.

Step 4 — Remove hoop holder




- Press tenon using screwdriver to remove shield.
- Remove hoop from hoop holder.

Step 5 — Assemble hoop holder



- Place hoop in hoop holder.
- Close hoop holder with shield.
- Insert M2.5x8 screw into hole and tighten the nut.

Step 6 — Stick cushion and label

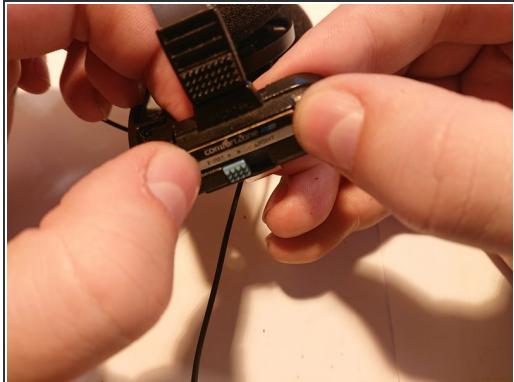

- Stick comfortZone label over the screw. Use double-sided foam tape if head of screw is too high.
- Stick cushion. Use additional double-sided tape if cushion has bad holding.

Left and right sides are the same so you can use this guide for both.