



# Kyocera DuraForce Pro Speakers Replacement

Replacing the speakers of a Kyocera DuraForce Pro.

Written By: Dylan Ulbricht



 **TOOLS:**

- [iFixit Opening Tools \(1\)](#)
- [JIS #0 Screwdriver \(1\)](#)

## Step 1 — Speakers





- Flip the phone over and remove the back cover with the plastic opening tool.
- Remove the 8 screws with the JIS #0 screwdriver bit.

## Step 2



- Using the plastic opening tool, pry up the battery.
- Remove the battery's cable with a pair of tweezers.

## Step 3

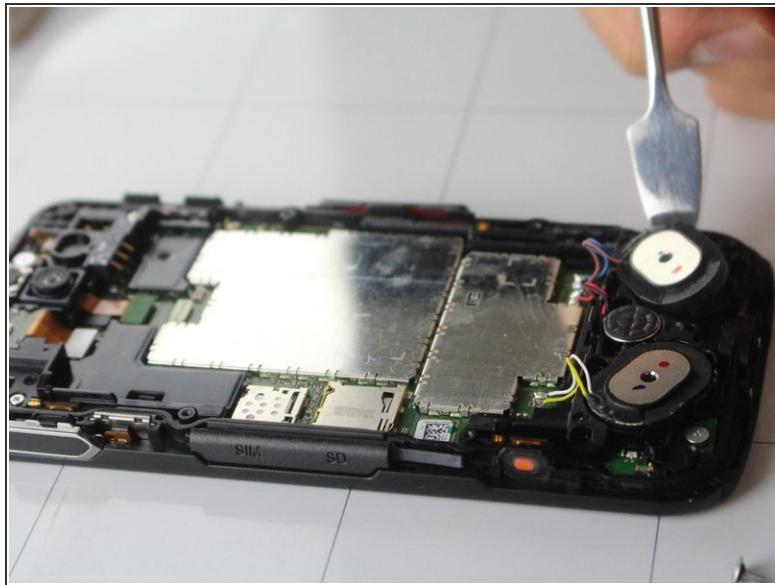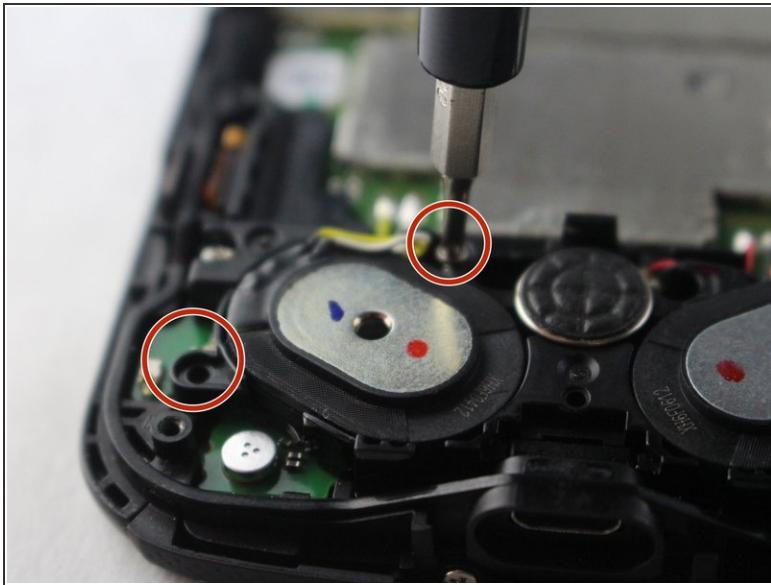

- Remove the 2 screws that are holding each of the speakers in place.
- Use the metal spudger to wedge underneath the adhesive to remove the speakers.
- Desolder the connecting wires to remove, then resolder when connecting new speakers.

To reassemble your device, follow these instructions in reverse order.