



Kyocera Hydro Life Power Button Replacement

This guide provides steps to replace the power button for the Kyocera Hydro Life phone.

Written By: Haley Brown



INTRODUCTION

This guide will show you how to disassemble the Kyocera Hydro Life phone in order to replace the power button.

TOOLS:

- [Tweezers \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [Phillips #00 Screwdriver \(1\)](#)

Step 1 — Power Button




- Remove the back cover.
- *(i)* Pry the cover upward from the gap above the charger port as displayed.

Step 2



- Remove the battery.

Step 3

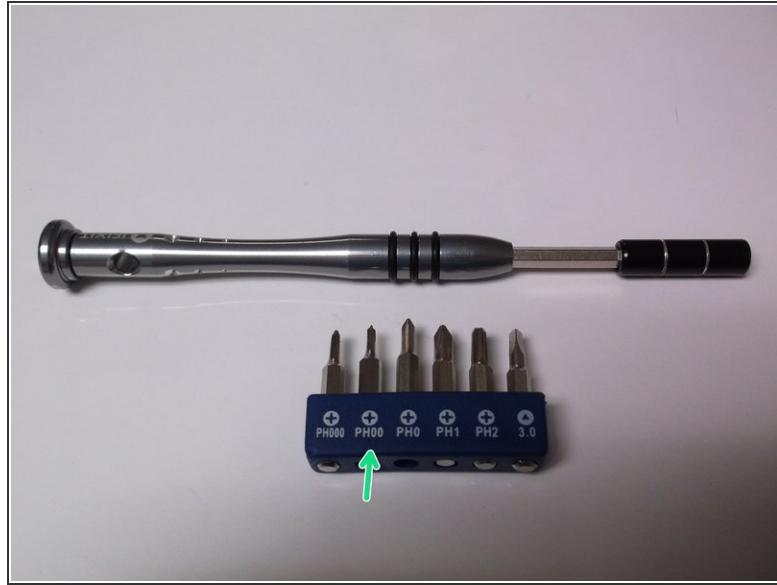

- Use a PH00 screwdriver to remove the 6 screws from the mid-frame.

⚠ Removing the screws too carelessly can result in them being damaged or stripped.

Step 4



- Remove the back panel trim.


⚠ The back panel trim is fairly thin, be cautious when removing it.

Step 5



- Remove the back panel.
- *i* Pry off the 4 corners first.

Step 6

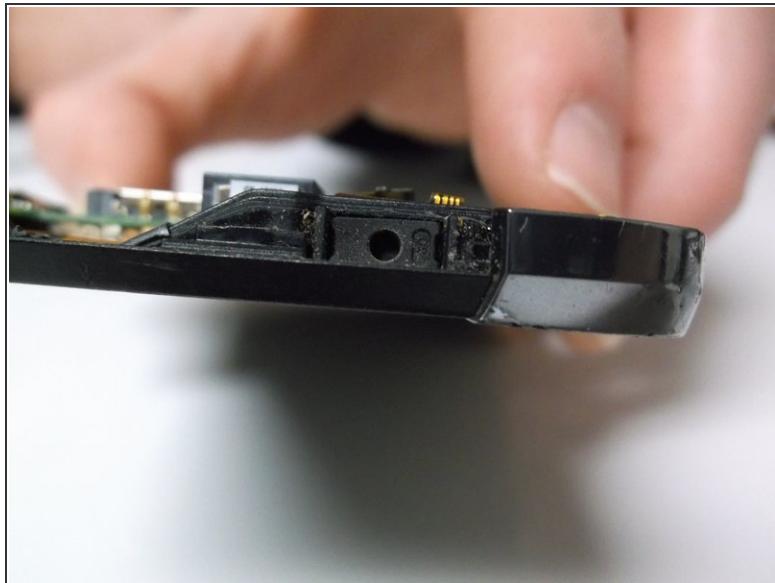

- Remove the power button with the tweezers.

To reassemble your device, follow these instructions in reverse order.