



# Kyocera Hydro Life Rear-Facing Camera Replacement

A step-by-step rear camera replacement guide for the Kyocera Hydro Life smartphone.

Written By: Morgan Marshall



## INTRODUCTION

A step-by-step rear camera replacement guide for the Kyocera Hydro Life smartphone.

### TOOLS:

- **Eyeglasses Repair Kit Screwdriver Size #00 (1)**
- **Prying and Opening Tool Assortment (1)**
- **Tweezers (1)**

## Step 1 — Rear-Facing Camera



- Flip the phone so that the screen is facing down.
- Gently remove the back cover with the grip at the bottom of the phone.

## Step 2



- Use the tab marked "PULL" to remove the battery from its enclosure.

## Step 3




- Remove the six Phillips #00 screws from the back of the enclosure.
- Use a plastic opening tool to gently remove the plastic piece surrounding the back of the phone enclosure.

## Step 4



- Remove the white sticker.

## Step 5

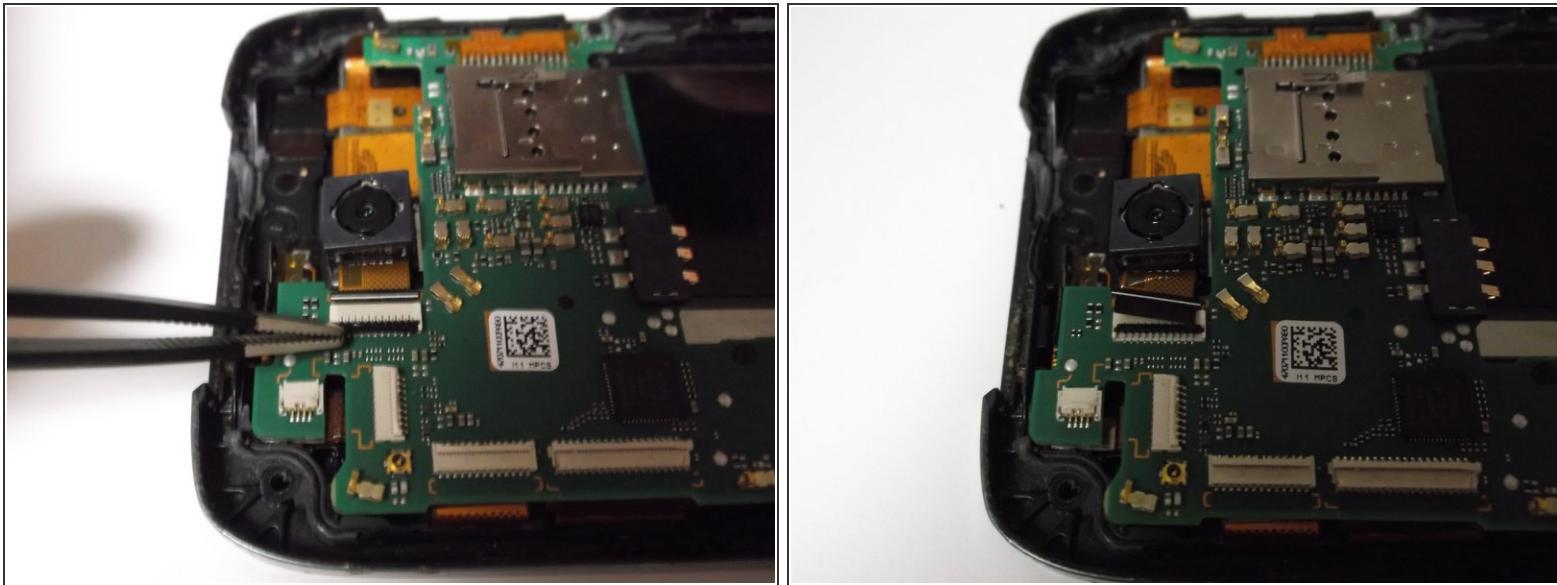

- Using a pair of pliers, gently pry open the camera ribbon slot.

*(i)* This will not take much pressure to open.


## Step 6



- Gently remove the camera ribbon.


*(i)* Be very careful not to rip the ribbon.  
Use tweezers if needed.

## Step 7

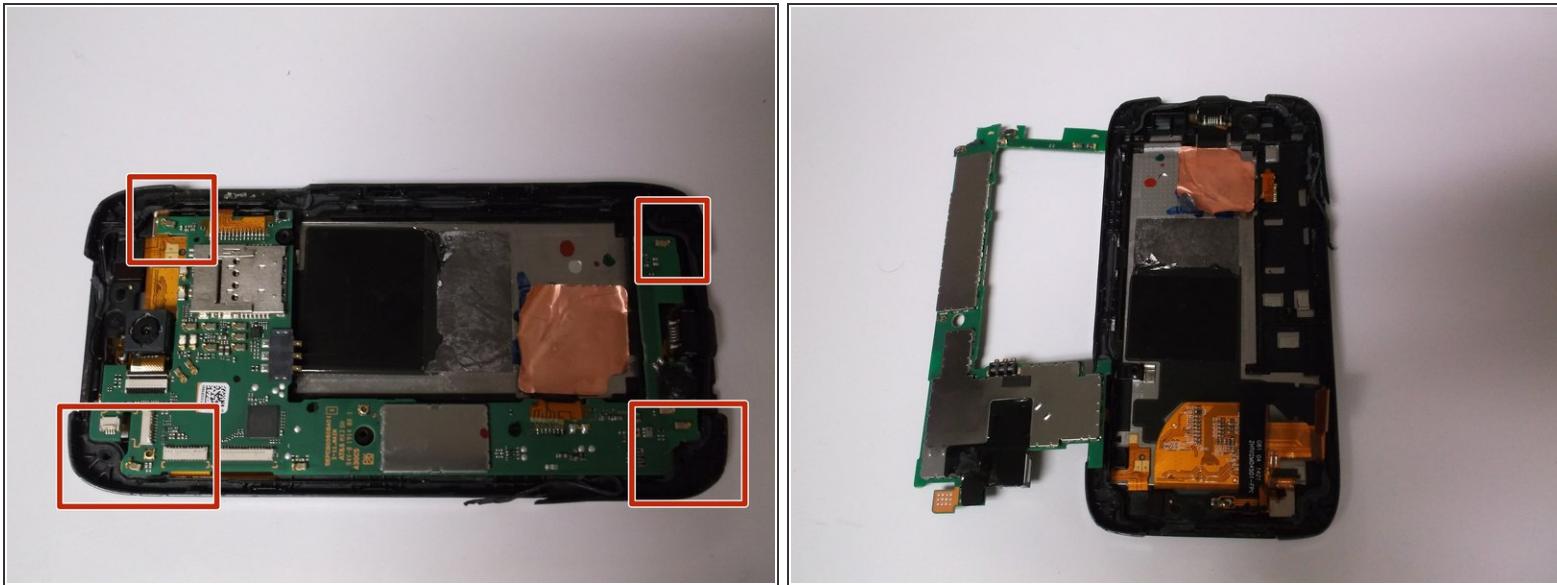

- Using a plastic prying tool, gently loosen all 4 corners of the motherboard.
- Lift the motherboard away from the phone enclosure.

## Step 8

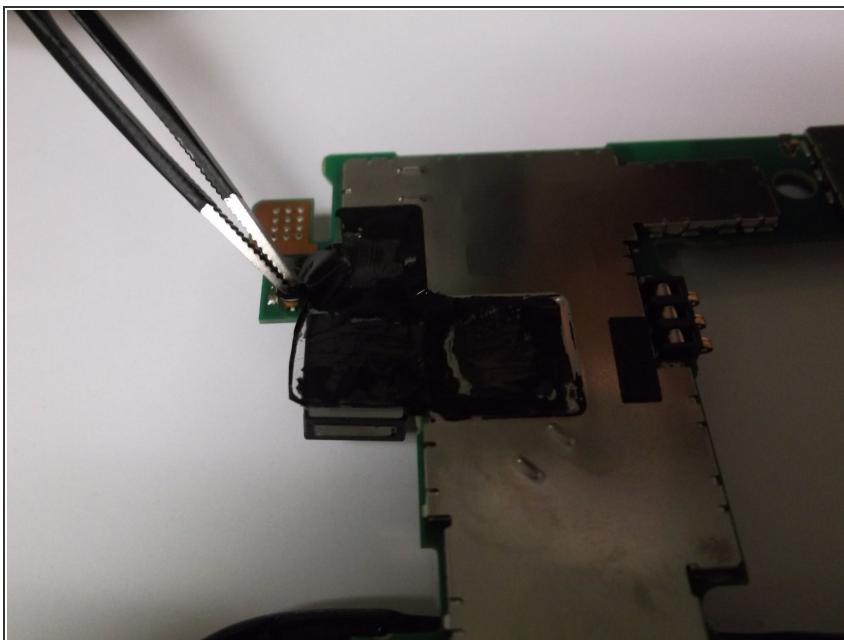

- Remove the black sticker.

**⚠** Be careful when removing the sticker. The sticker will need to be replaced after replacing the camera.

## Step 9



- Remove the camera from the motherboard.

**⚠** This step requires breaking metal.

**i** Only cut along the camera square.

To reassemble your device, follow these instructions in reverse order.