




LG Aristo Screen Replacement

This guide will accomplish the importance about your screen. What are the main issue? Also how to replace it if necessary.

Written By: Geobanny Cardenas

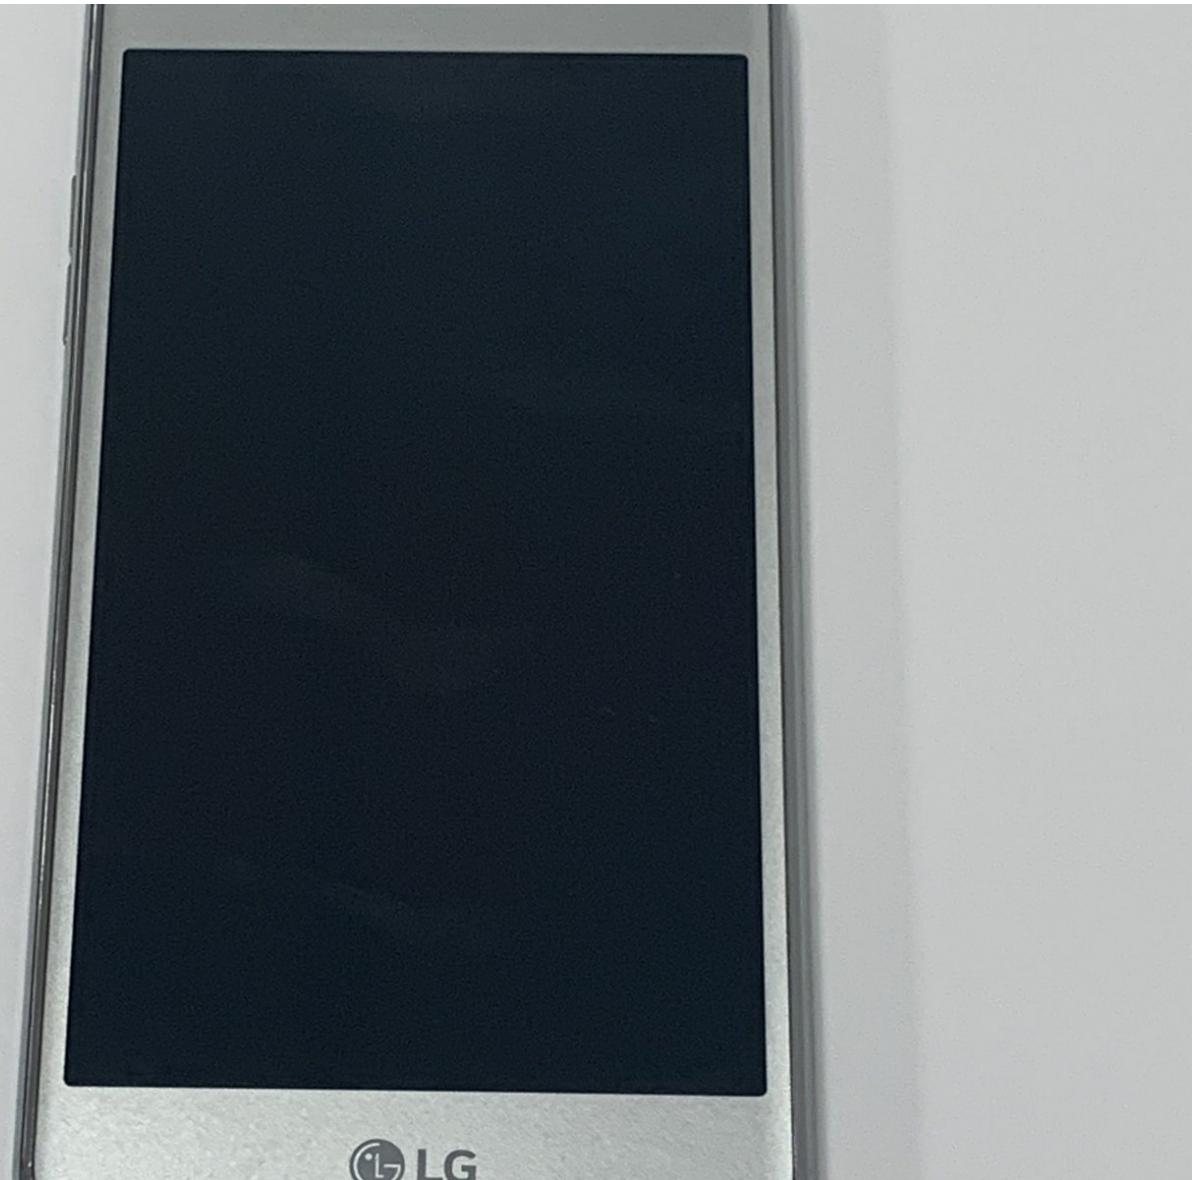

INTRODUCTION

The guide was developed to help replace the screen of a LG Aristo, also known as LGMS210 or MS210.

TOOLS:

- [Phillips #000 Screwdriver](#) (1)
- [Tweezers \(optional\)](#) (1)
- [1 x Opening Picks](#) (1)
- [Metal Spudger](#) (1)
- [iFixit Opening Tools](#) (1)

Step 1 — Screen



- Turn off the device and make sure you are working on a flat, lit surface.

Step 2



- Use an iFixit opening tool to pry off the back case.

Step 3





- Remove the SD and SIM cards by sliding the cards out with your finger.

Step 4




- Remove the battery by prying it up with a fingernail or opening tool from the bottom edge.

Step 5

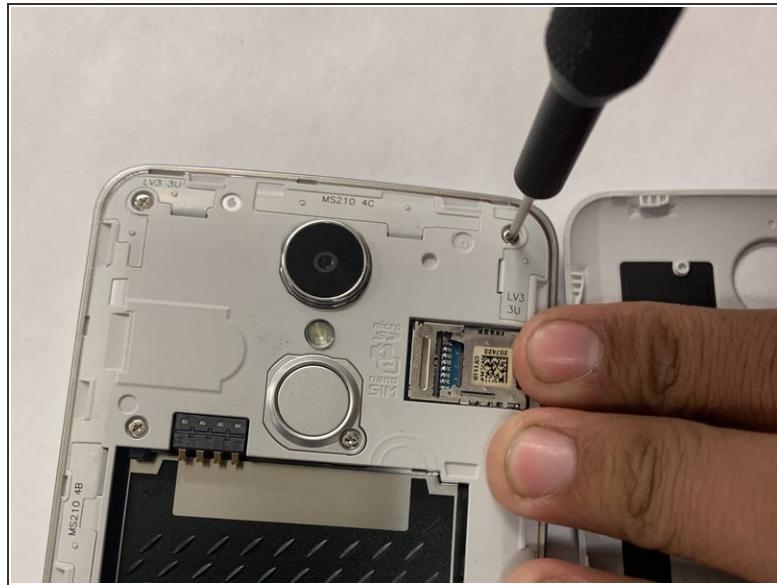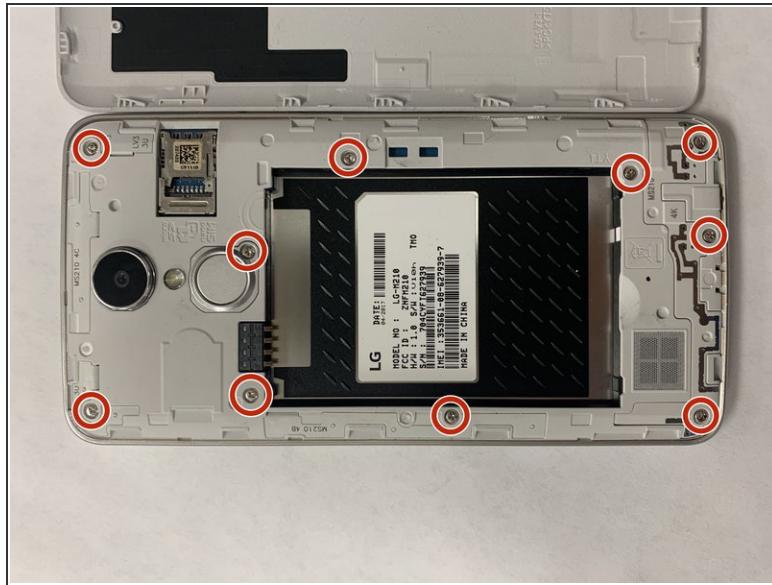

- Remove the ten screws from the midframe with a Phillips #000 screwdriver.


Step 6

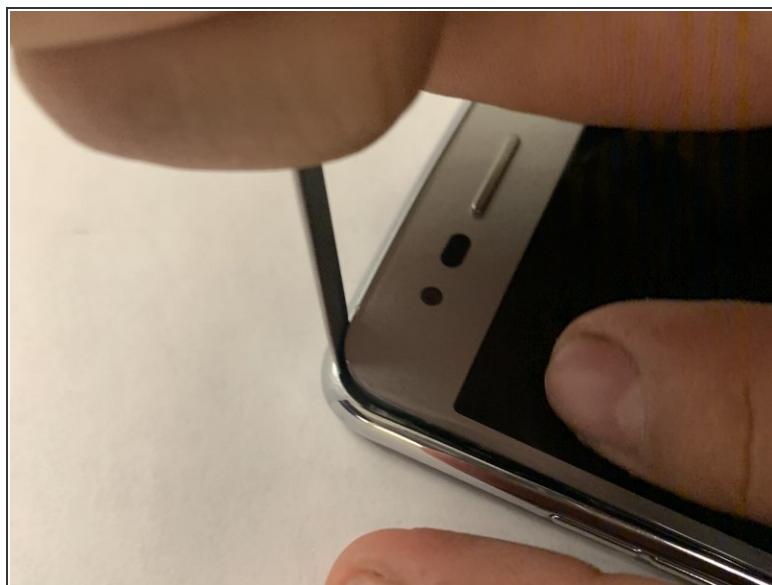

- Pry up on the screen with a plastic opening tool.

⚠ Try to avoid using a metal spudger as shown in the images as it has the possibility to damage the screen.

Step 7

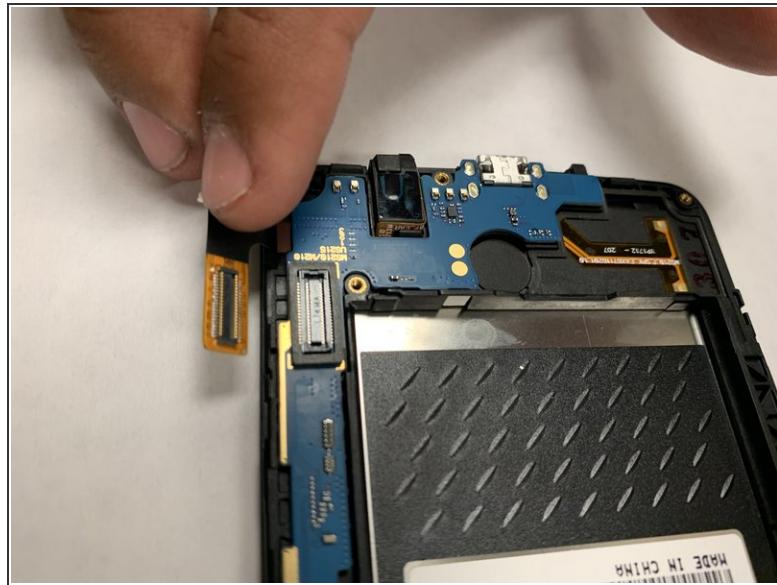

- Detach the cables from the press fit connectors.
- There are four connectors in total, they consist of two on the cameras, one on the ear jack, and the one attached to the motherboard.
- You can lift them up with you finger or you can use tweezers (optional).

Step 8



- Gently remove the motherboard.

Step 9



- Replace the screen.

To reassemble your device, follow these instructions in reverse order. I hope that these steps have helped you with your issue.

