



LG CF360 Rear Speaker Replacement

How to remove the back speaker.

Written By: Annie White




INTRODUCTION

This guide will teach you how to remove the back speaker, located directly underneath the back cover. Only minimal disassembly is required.

TOOLS:

- [Phillips #000 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [Tweezers](#) (1)

Step 1 — Battery

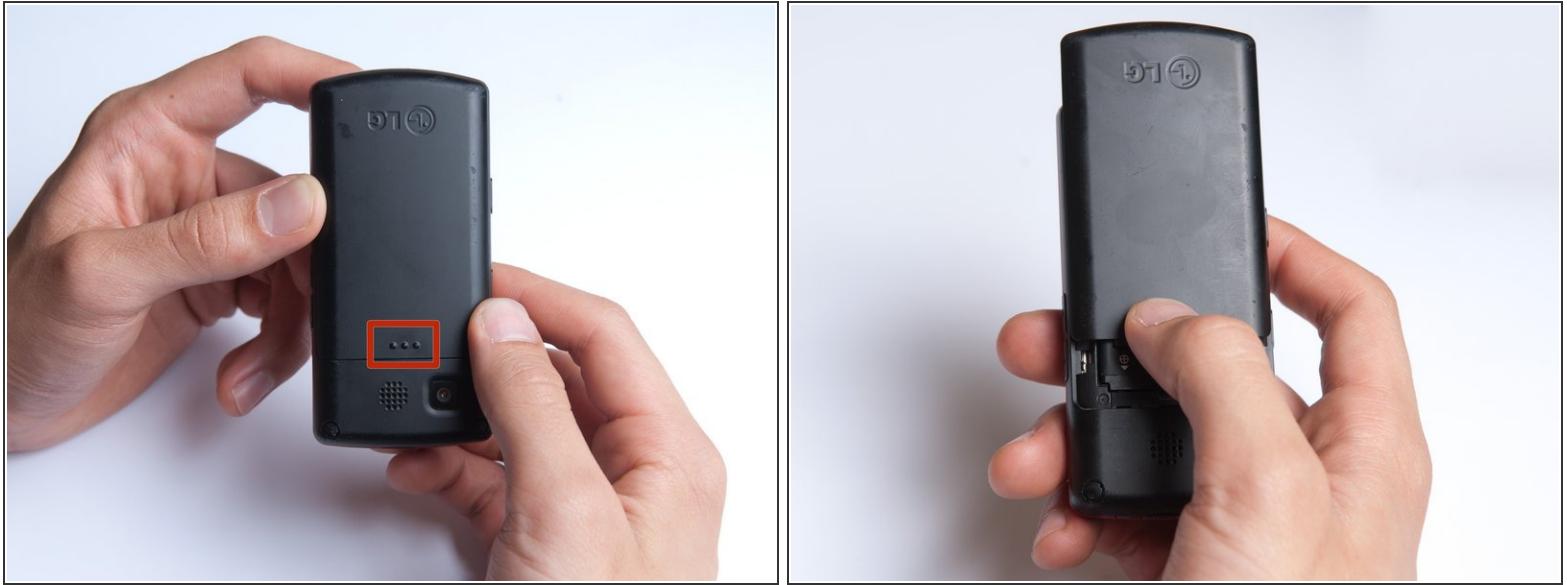


- On the back of the phone, place your thumb on the three raised bumps and slide the back cover upward.

Step 2



- Lift and remove the battery.

Step 3 — Back Cover

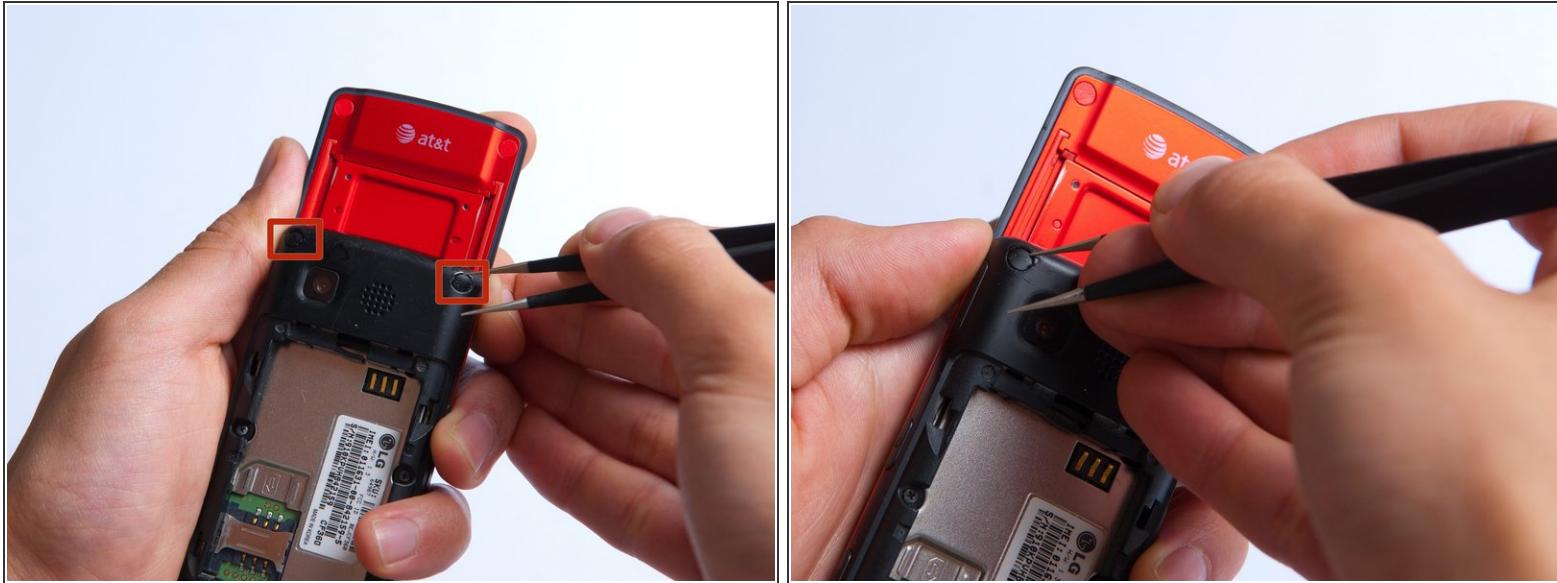

- Remove the two screw covers at the top of phone with tweezers.

Step 4



- Remove the six Phillips #000 (3mm) screws.

Step 5




- Use the plastic opening tool to pry the back cover off. Insert the tool between the back cover and red mid section and go around the entire phone.

(i) The plastic side buttons fall out when you take the back cover off.


(i) The back cover is connected to the speaker by red and black wires.

Step 6

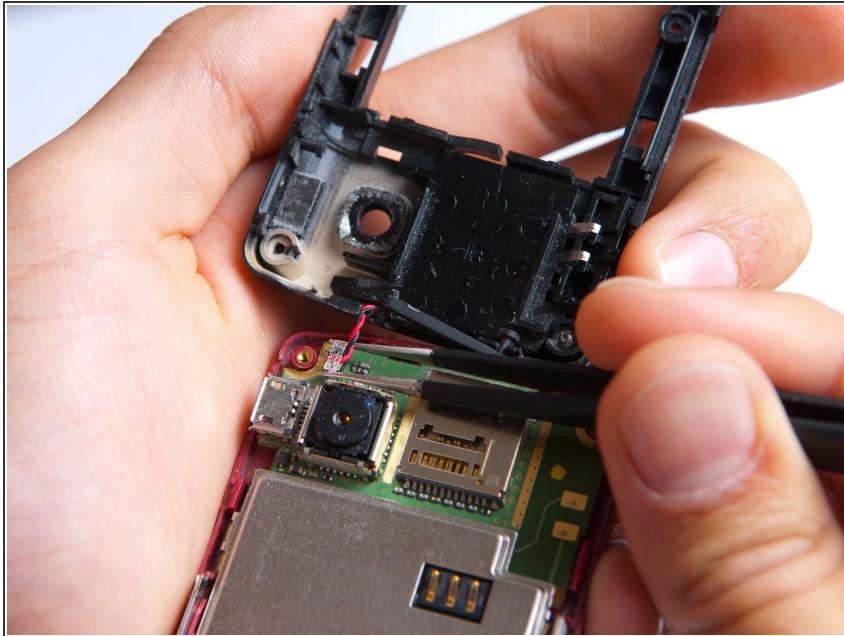


- Use the tweezers to remove the red and black wires connecting the speaker to the green motherboard by pinching the sides of the plastic base near the motherboard.
- Set the back cover with the speaker aside.

Step 7 — Rear Speaker

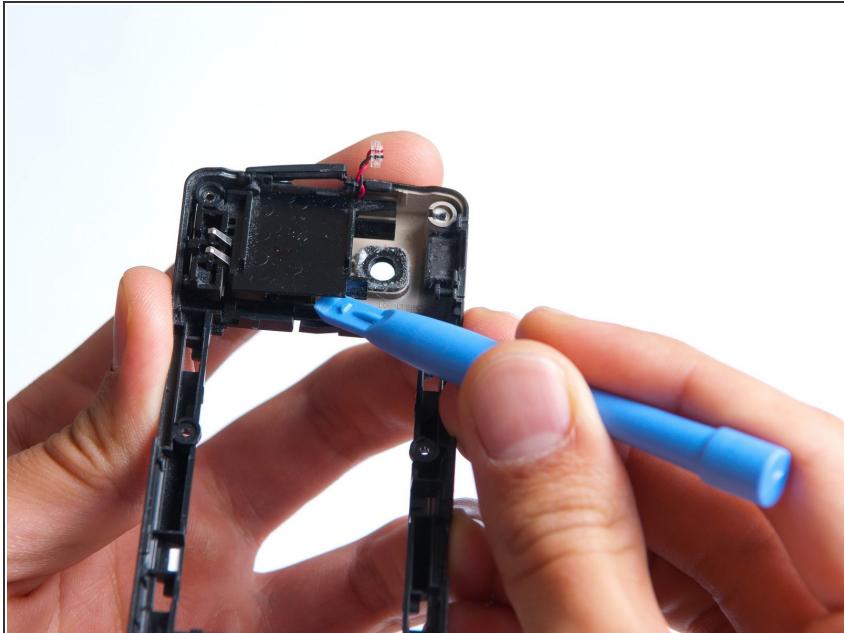

- Use the plastic opening tool to pry the speaker cover off of the phone.

Step 8

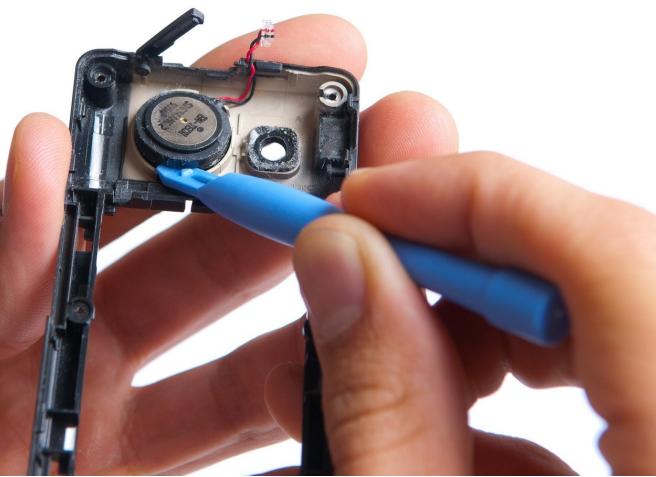

- Use the plastic opening tool to pry the speaker out of the back cover.

To reassemble your device, follow these instructions in reverse order.