




LG G2 mini LTE Headphone Jack Replacement

If there is no sound coming out of the headphones, it is possible that the headphone jack needs to be replaced. These are the steps needed to replace the headphone jack on the LG G2 mini.

Written By: Aung Myin Thu Mayet

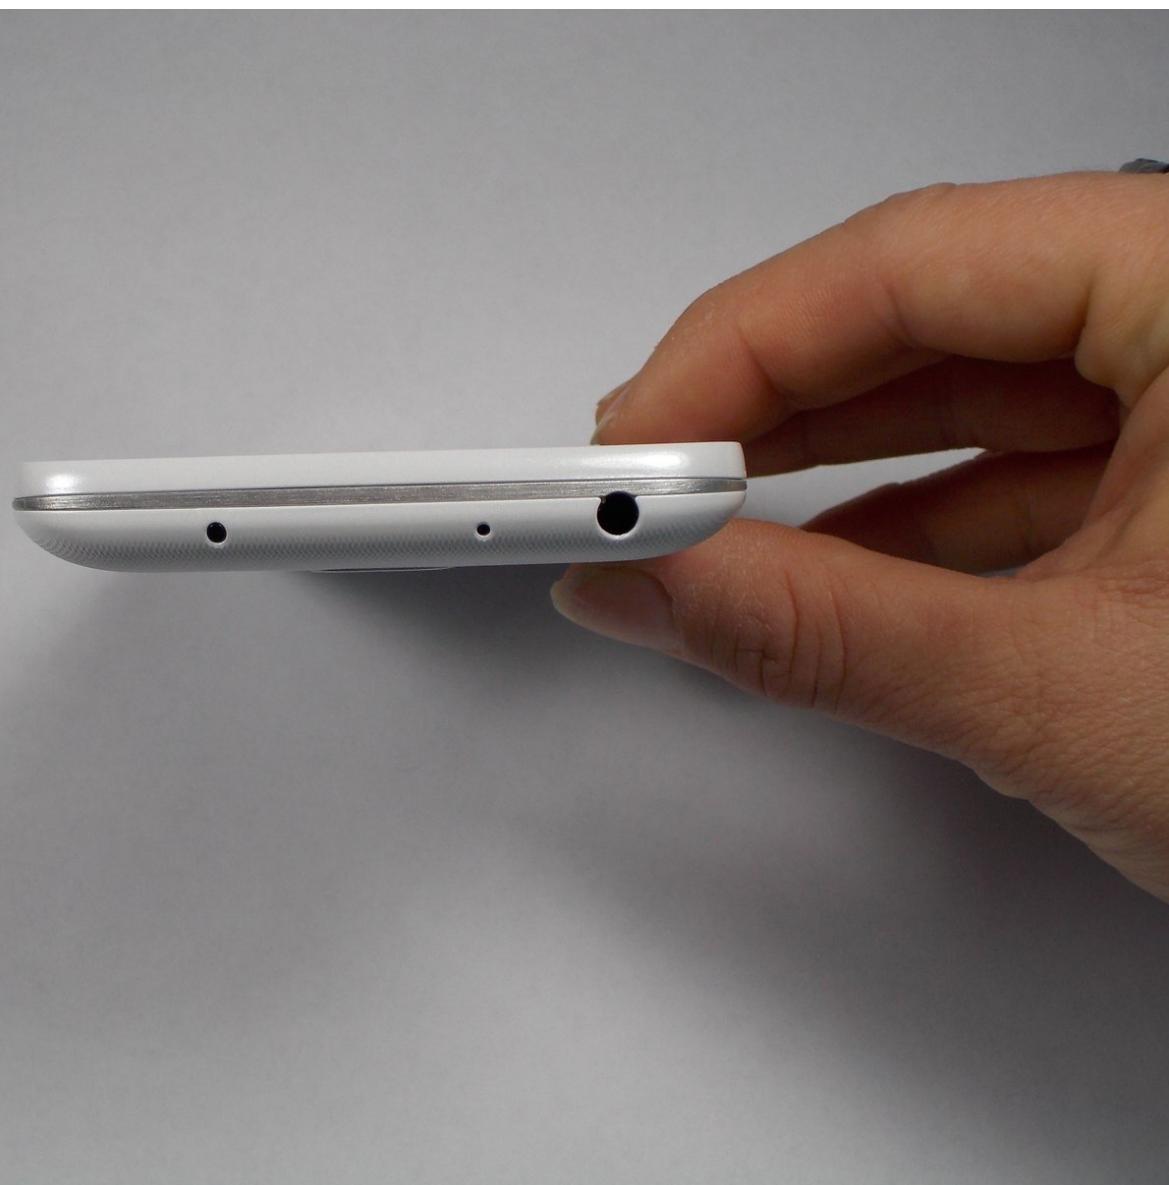

 **TOOLS:**

- [Phillips #2 Screwdriver \(1\)](#)
- [Spudger \(1\)](#)

 **PARTS:**

- [LG G2 mini Headphone Jack Replacement Part \(1\)](#)

Step 1 — Remove the Battery Cover



- Remove the back cover by placing your fingernail in the crease between the cover and the charging port.
- Pry upward and the cover should pop off easily.

Step 2 — Remove the Battery



- Remove the battery from the battery bay by prying with your finger at the groove on the lower end of the battery bay.

Step 3 — Unscrew the Motherboard Cover




- Locate 10 screws and remove each one using a screw driver.

Step 4 — Remove the Motherboard Cover



- Use a plastic spudger tool to pry away the cover by placing it between the cover and the screen bezel.
- Pry all the way around the phone about every centimeter until the cover is completely separated from the phone.

Step 5 — Remove Headphone jack

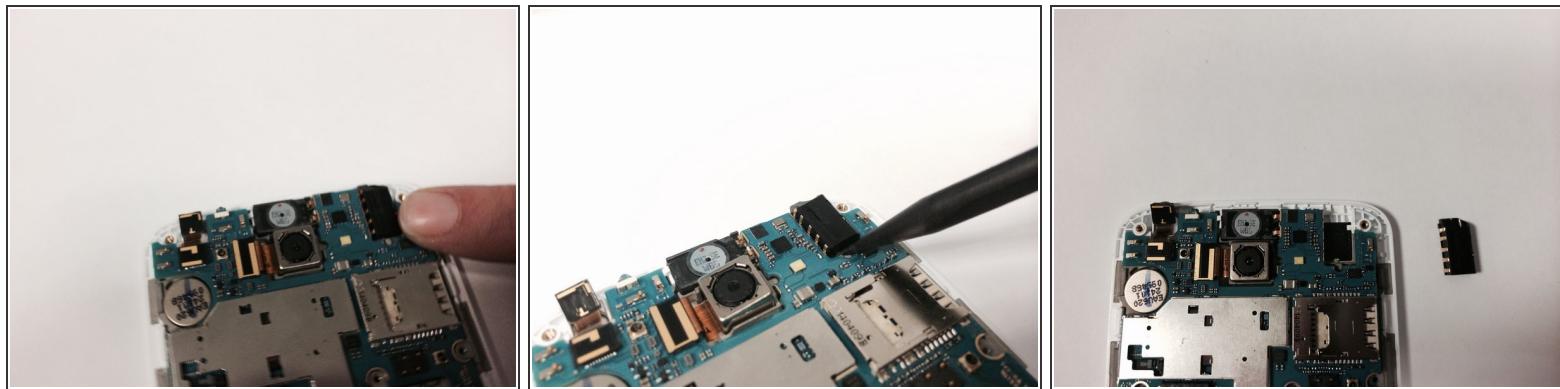

- Locate the headphone jack.
- Use spudger tool to pry the headphone jack from the bottom.
- Use fingers to fully remove the headphone jack.

To reassemble your device, follow these instructions in reverse order.