



LG Optimus F3 Speaker Replacement

This guide will guide step by step the procedure to replace a faulty speaker.


Written By: Hubert



 **TOOLS:**

- [iFixit Opening Tools \(1\)](#)
- [Phillips #00 Screwdriver \(1\)](#)

Step 1 — Speaker

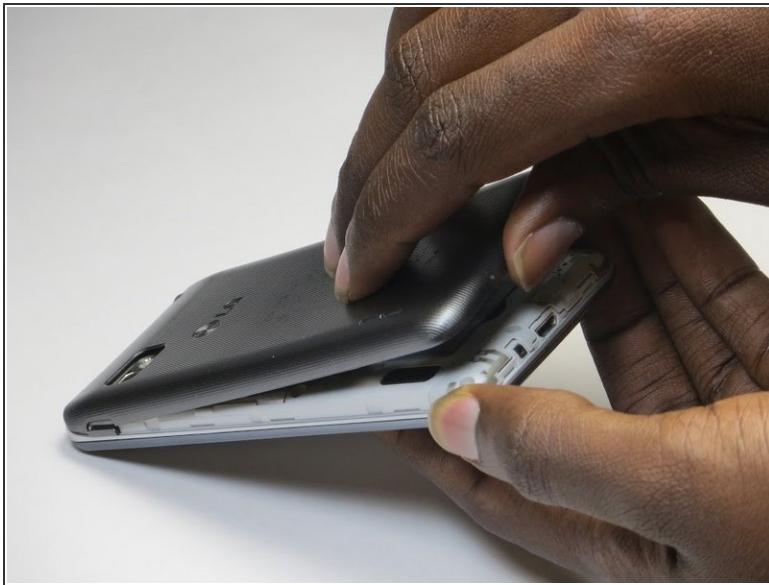

- Remove battery cover.
- Remove battery

Step 2




- Remove the ten (10) holding screws located on the phone using phillips screwdriver.

Step 3




- Use spudger tool to separate the main board from back face.

Step 4 — Speaker Removal

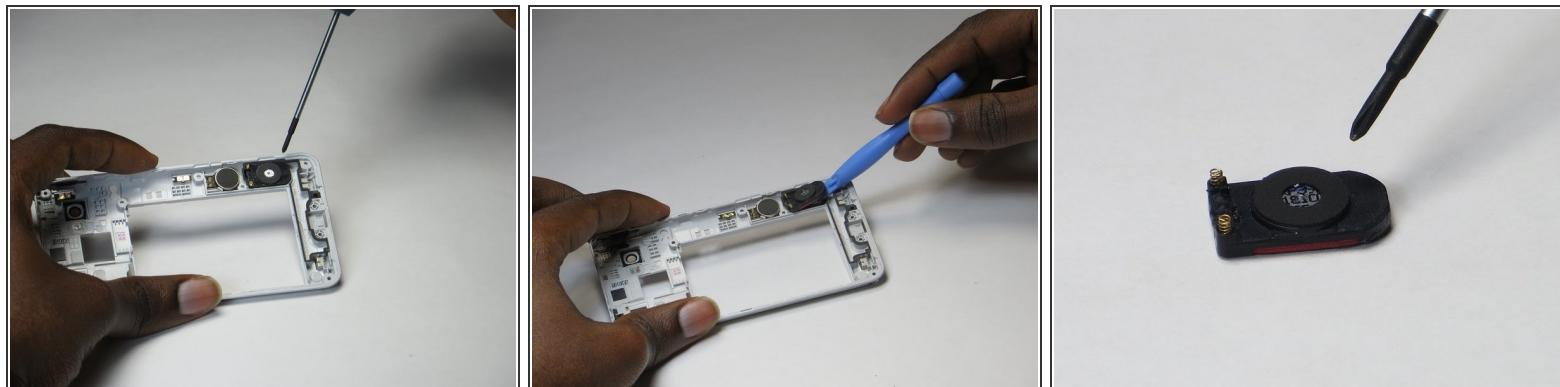

- Locate faulty speaker.
- Use spudger to separate speaker from terminal (it will take a reasonable amount of force to do this, due to the adhesive holding the speaker in place).

Step 5 — Speaker Placement

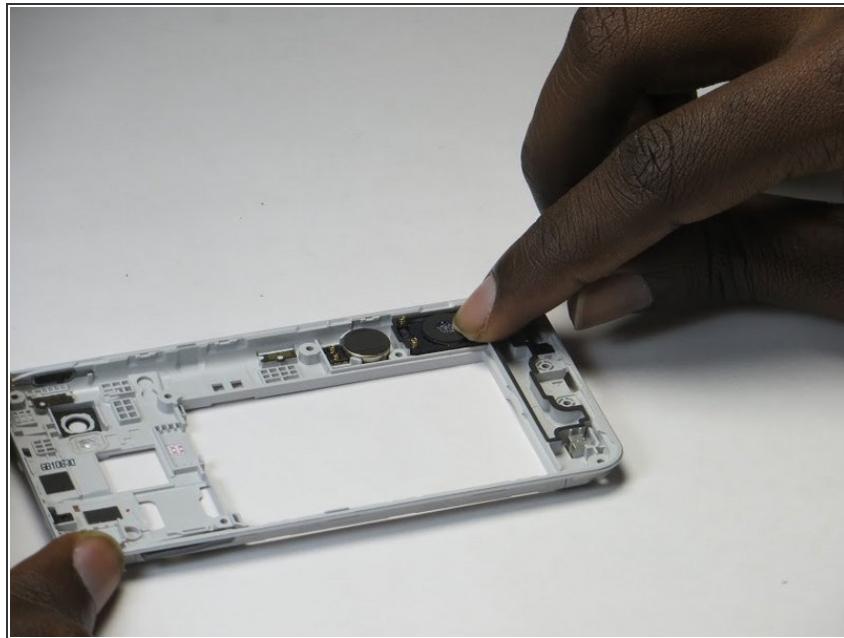

- Align new speaker to the area.
- Ensure speaker is securely in place.

To reassemble your device, follow these instructions in reverse order.