



LG Power Screen Replacement

If your touchscreen is cracked or unresponsive, you may have to remove your old screen and replace it with a new one. Follow this guide to access and replace your LG Power touchscreen.

Written By: Nadia Wilson



INTRODUCTION

This guide is made to help remove the screen from your phone if you are having problems with it or need to replace it. Be careful while removing the back plating, mid plating, and screen. If this is your first time removing a touchscreen seek the help of a professional, because you may accidentally caused the image on the screen to after you put the phone back together.

TOOLS:

- [Phillips #000 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [Screwdriver](#) (1)

Step 1 — Battery



- Slide a plastic spudger, or guitar pick, between the back and front panel at the bottom .

⚠ A metal spudger can easily damage your device. A plastic opening tool is always the only option.

Step 2



- Carefully pop the back panel off and place it to the side.

Step 3




- Use the thumb tab to remove the battery.

Step 4 — Motherboard




- Remove the eight 4mm screws along the side of the mid panel using the Phillips #000 screwdriver head.

Step 5

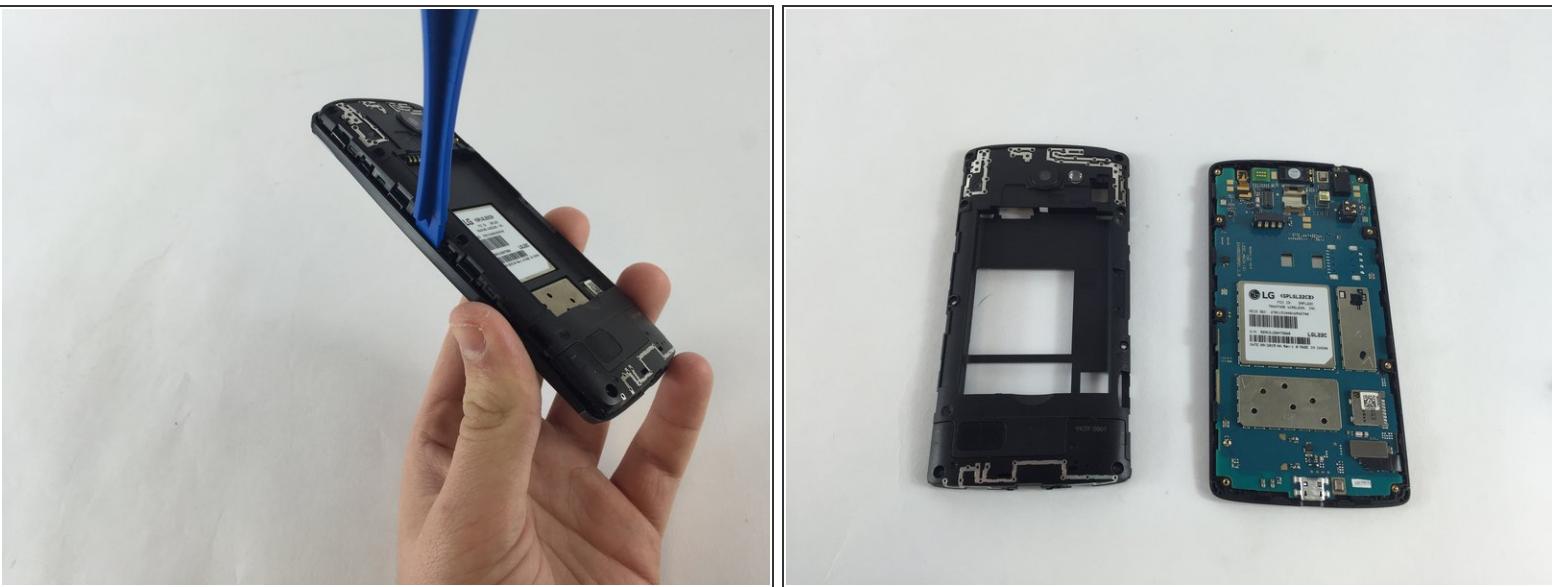

- Slide a plastic opening tool between the mid and front panel to remove the middle panel.
- Place the mid panel to the side.

Step 6

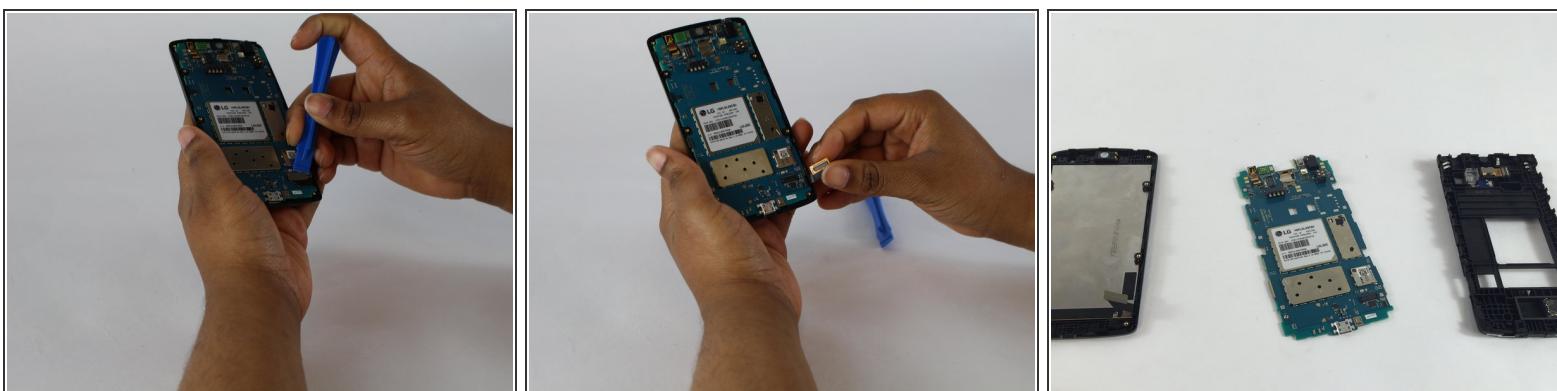

- Detach the motherboard and touchscreen from each other by using a plastic opening tool.
- The motherboard will then be free from the phone.

Step 7 — Screen



- After removing the motherboard, slide a thin plastic opening tool between the screen and the frame.
- *(i)* This step may take awhile, because of the glue keeping the frame and screen together.

To reassemble your device, follow these instructions in reverse order.