



# LG Risio Midframe Replacement

This guide will give you walk through as to how to replace the midframe of the LG Risio.

Written By: Kevin Garcia




## INTRODUCTION

Use this guide if you are looking to gain access to the LG Risio Motherboard or other components inside the device.

### TOOLS:

- [iFixit Opening Tools](#) (1)
- [Phillips #0 Screwdriver](#) (1)

## Step 1 — Back Panel

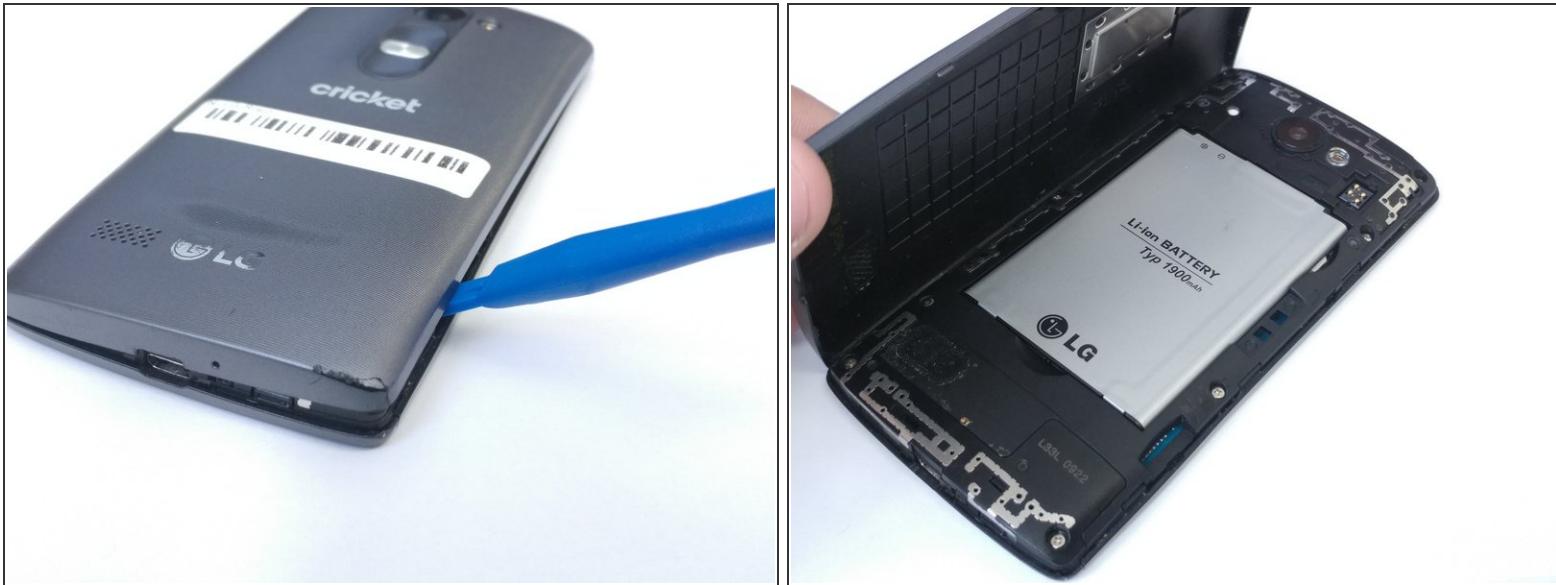


- Use a plastic opening tool to separate the back panel from the device.
- Remove the back panel.

## Step 2 — Battery



- Place your thumb along the bottom of the battery and pry upwards to remove.

## Step 3 — Midframe

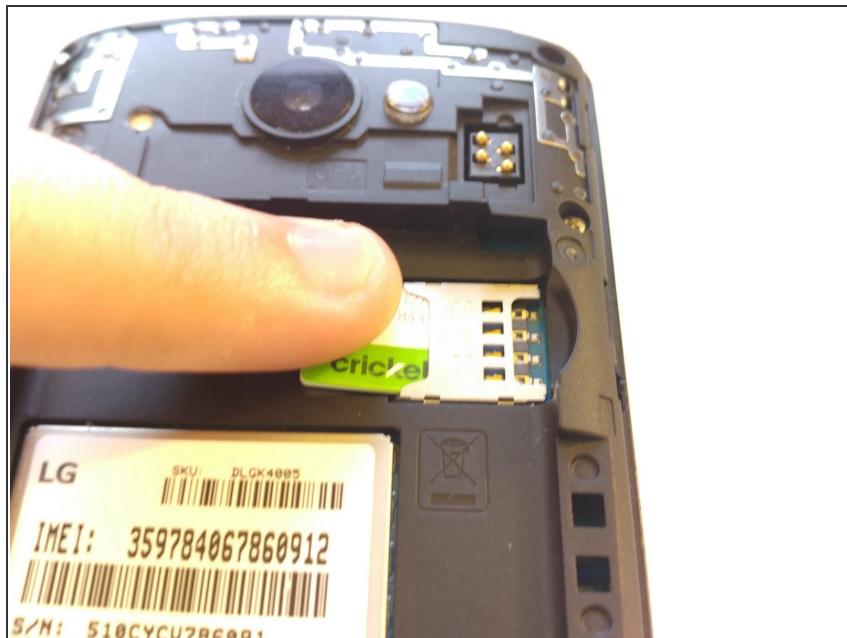

- Press down on the SIM eject tab with a fingernail (or iFixit opening tool), and slide the SIM card out.

## Step 4



- Remove the eight Phillips #0 screws from the internal support frame.

## Step 5



- Use an opening tool on the marked locations to lift the edges up. There should be a small click when lifting these edges up.

## Step 6



- Using your hand, pick up the midframe to separate it from the phone.

**⚠** If the midframe does not want to lift off, go back and repeat step 6.

To reassemble your device, follow these instructions in reverse order.