




LG Rumor Touch Motherboard Replacement

By following the following procedures, you will successfully be able to replace the mother board in your LG Rumor Touch cell phone.

Written By: Jose Rivas

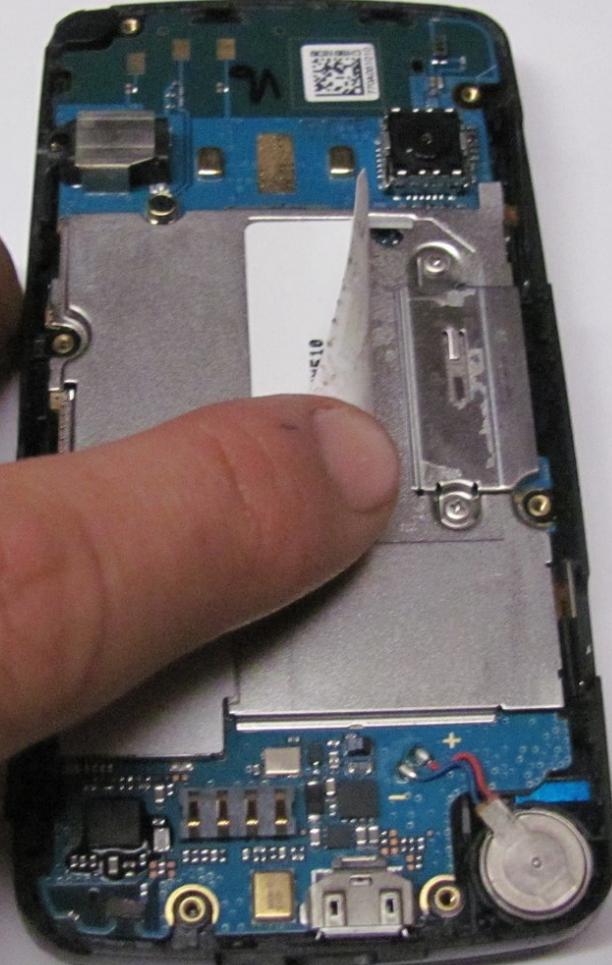

INTRODUCTION

This guide explains how to replace the motherboard of an LG Rumor Touch, a touch screen phone.

TOOLS:

- [Spudger](#) (1)
- [Phillips #1 Screwdriver](#) (1)
- [Phillips #00 Screwdriver](#) (1)

Step 1 — Battery



- Remove the phone's back cover by placing your thumb the above charging port, located at the bottom of the phone, and sliding the back cover upward.

Step 2



- Gently pry the battery out of the phone with the spudger.

Step 3 — Inner Shell




- Unscrew the 5 #1 5mm screws.

Step 4



- Lift the inner shell from the phone.

Step 5 — Motherboard

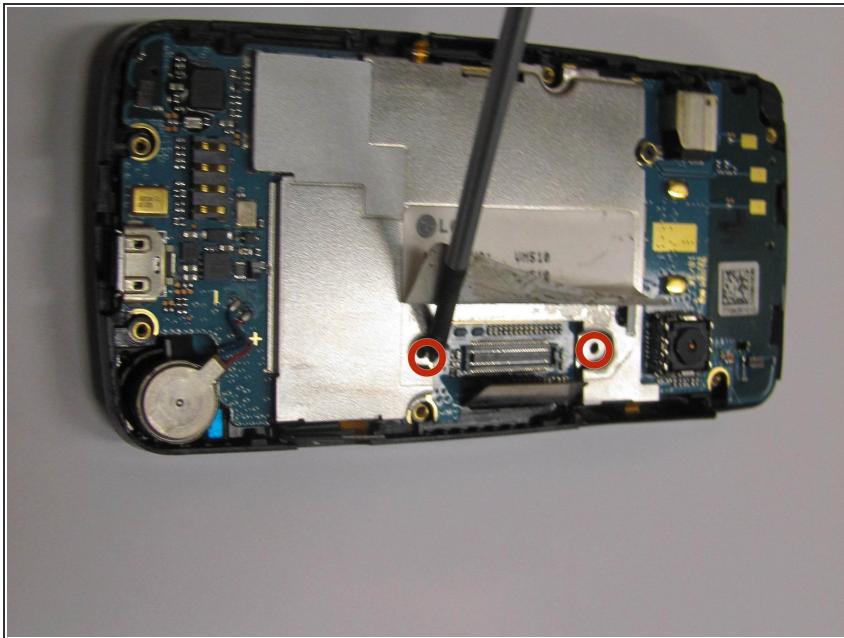


- Unscrew two 2mm #00 screws located behind the white serial code sticker.

Step 6




- Disconnect the ribbon found in the middle of the phone
- Gently pull the ribbon out of the way.

Step 7

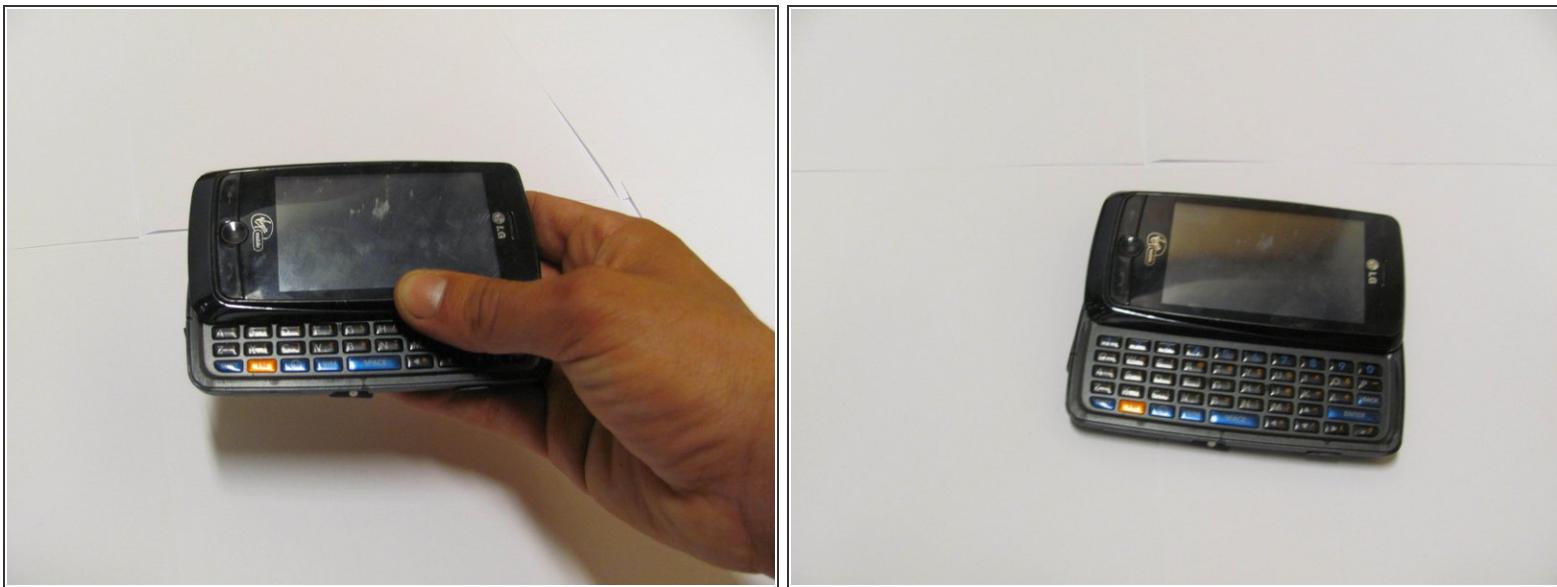

- Slide open the phone, revealing the QWERTY keyboard.

Step 8

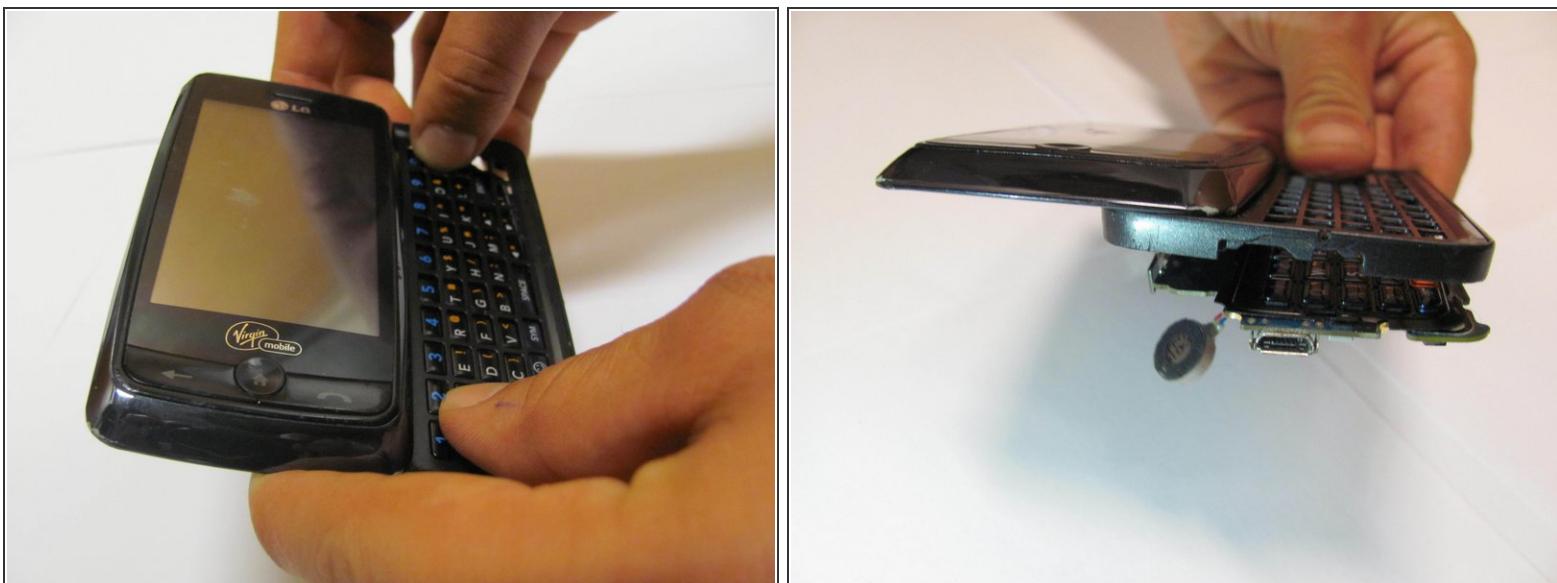

- Carefully push the mother board through by pressing into the keyboard.

Step 9



- The mother board will fall out of the back along with the silicon keyboard pad.

To reassemble your device, follow these instructions in reverse order.