



LG Spectrum Audio Port Replacement

Replacing the Audio Port can potentially fix and skipping or non-existent audio.

Written By: Aiman Sallam



INTRODUCTION

If the audio still skips or doesn't work even after trying to use different headphones then you may need to replace the Audio Jack in the phone. This guide will take you through the necessary steps to accomplish this.

TOOLS:

- [iFixit Opening Tools](#) (1)
- [Phillips #000 Screwdriver](#) (1)

Step 1 — Battery



- Using your thumbnail, lift up on the notch in the middle of the bottom side of the phone.

Step 2



- Using either your thumbnail or a plastic opening tool, lift up on the battery using the notch in the bottom left hand corner of the battery and remove it from the phone.

Step 3 — Audio Port




- Remove eleven 4mm Phillips #000 screws with a PH000 screwdriver.
- Use the magnet board to keep the screws in one place.*

Step 4



- Use the plastic opening tool to firmly unclip the plastic backing around the perimeter of the phone.

Step 5

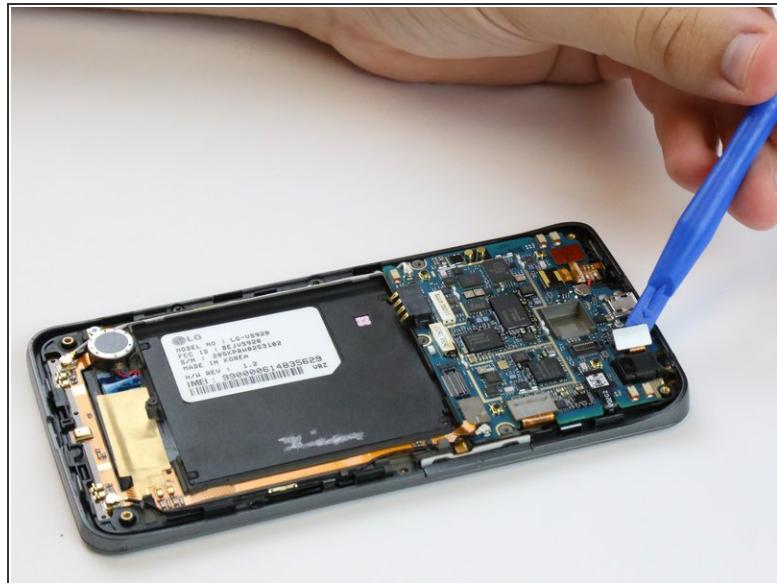

- Using the plastic opening tool, gently pry up the plastic film connecting the audio port to the motherboard.

Step 6



- Remove the audio port from the motherboard either with your hand or the plastic opening tool.

To reassemble your device, follow these instructions in reverse order.