



LG Stylo 2 Plus Mid-Frame Replacement

Removal of the LG Stylo 2 Plus mid-frame.

Written By: Tiffany Wheeler



INTRODUCTION

This guide will assist you in the removal process of the LG Stylo 2 Plus mid-frame.

TOOLS:

- [Spudger \(1\)](#)
- [Metal Spudger \(1\)](#)
- [JIS #000 Screwdriver \(1\)](#)

Step 1 — Rear Case




- To remove the rear case of the phone, insert the spudger into the opening on the back of the case.
- With the spudger parallel to the frame of the phone, slide it along the edge, forcing the casing to pop off.

Step 2 — Battery



- To remove the battery, insert your fingernail or the flat end of the spudger into the dimple at the bottom of the battery and lift upwards.
- Firmly grasp the battery and remove from the phone.

Step 3 — Mid-Frame

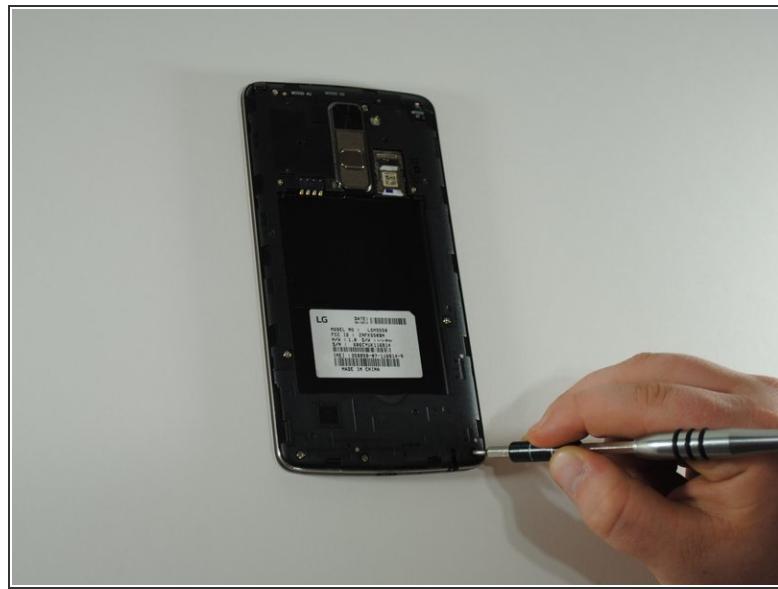

- Using the JIS #000 screwdriver, remove the eleven 4mm screws around the mid-frame.

Step 4



- Insert the metal spudger in the dimple at the base of the cover.
- Pry upward, removing the mid-frame from the phone.

To reassemble your device, follow these instructions in reverse order.