




LG TP 1100 Keypad Replacement

Written By: Johnny Inlow

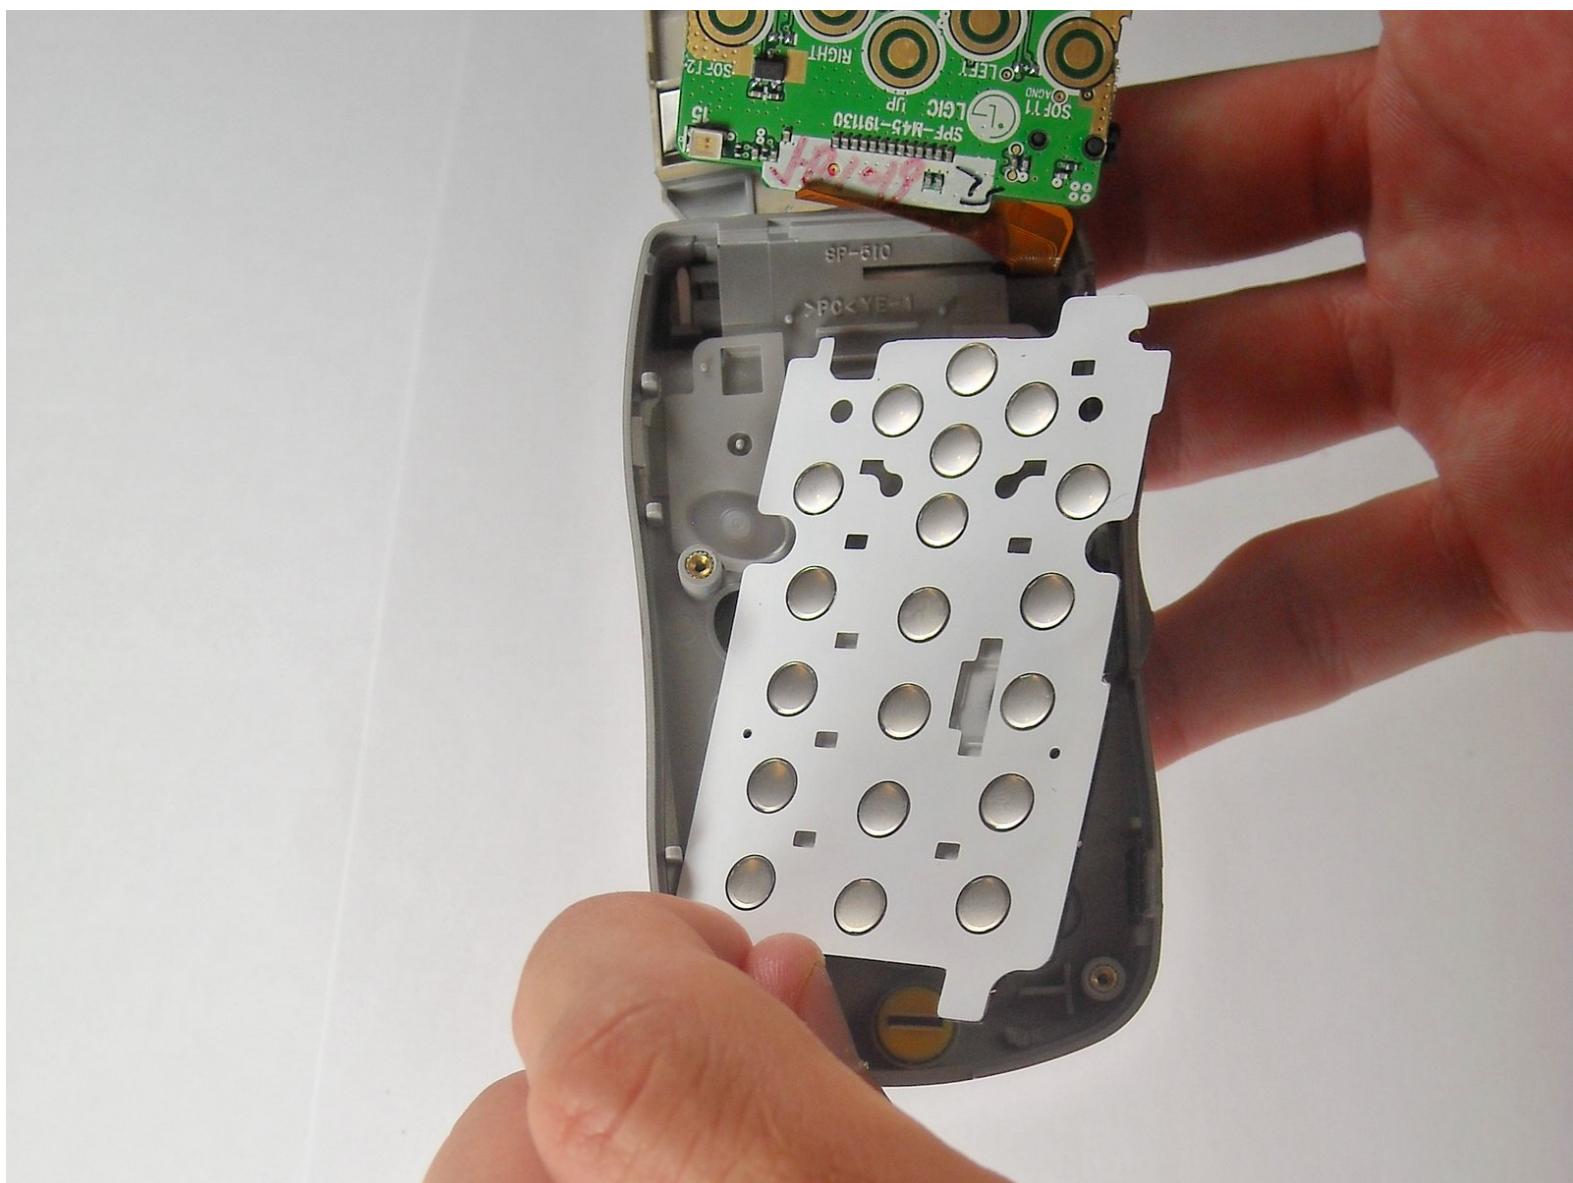

This document was generated on 2019-09-17 05:32:23 PM (MST).

INTRODUCTION

The keypad for the phone

TOOLS:

- [iFixit Opening Tools](#) (1)
- [64 Bit Driver Kit](#) (1)

Step 1 — Keypad



- Unscrew Antenna

Step 2



- Pull Antenna from socket

Step 3



- Turn Phone over

Step 4



- Pull up tab on top

Step 5




- Remove the battery

Step 6



- Unscrew the four screws behind the battery

Step 7

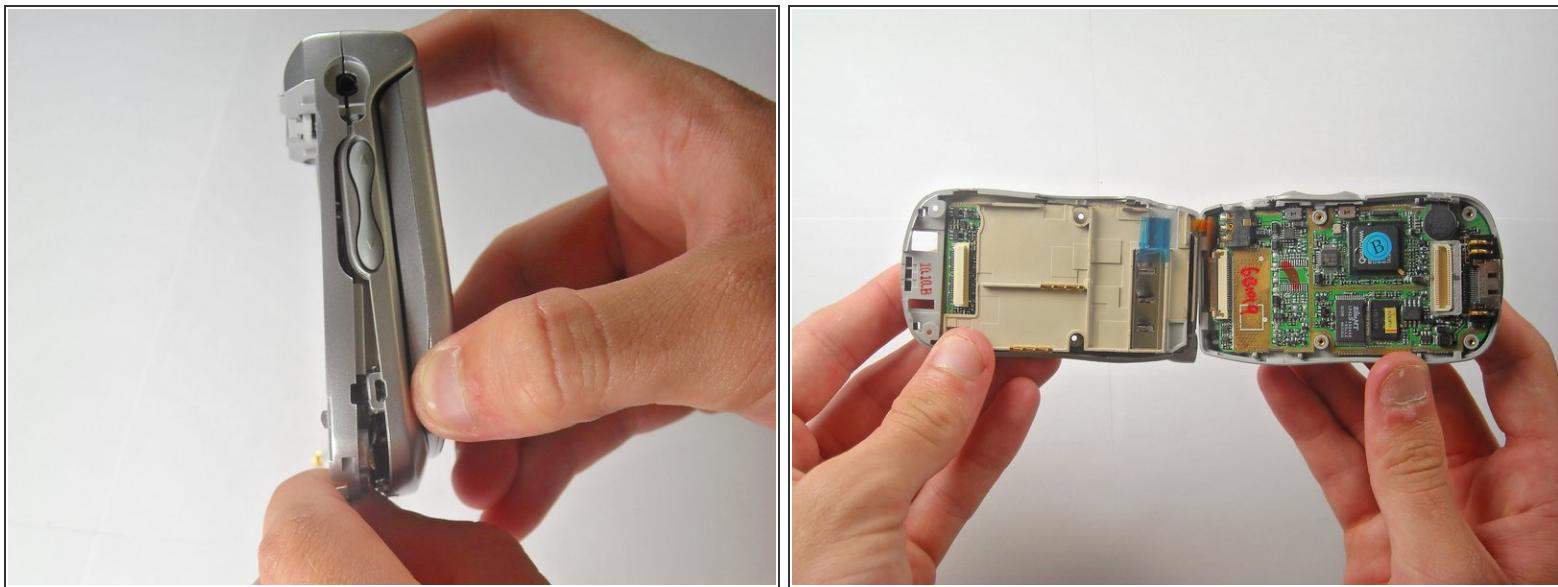


- Pull off back cover
 - Do not separate the covers
 - Do not rip the tape connecting the two covers

Step 8




- Remove back cover

Step 9

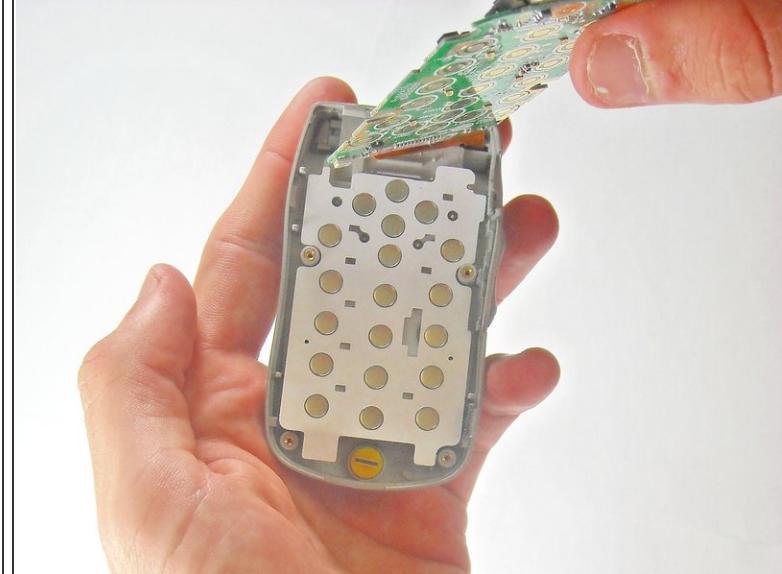

- Pry the circuit board from front cover
- Do not let number pad fall out

Step 10

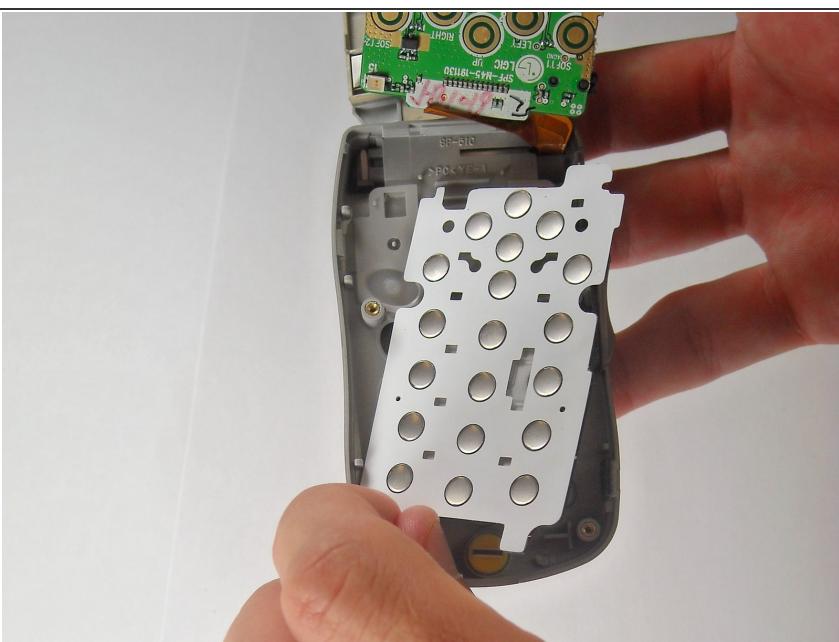

- Now remove the number pad

Step 11



- Remove the navigation keys

To reassemble your device, follow these instructions in reverse order.