




LG Tribute motherboard Removal

prerequisite only guide

Written By: Aaron Amdall

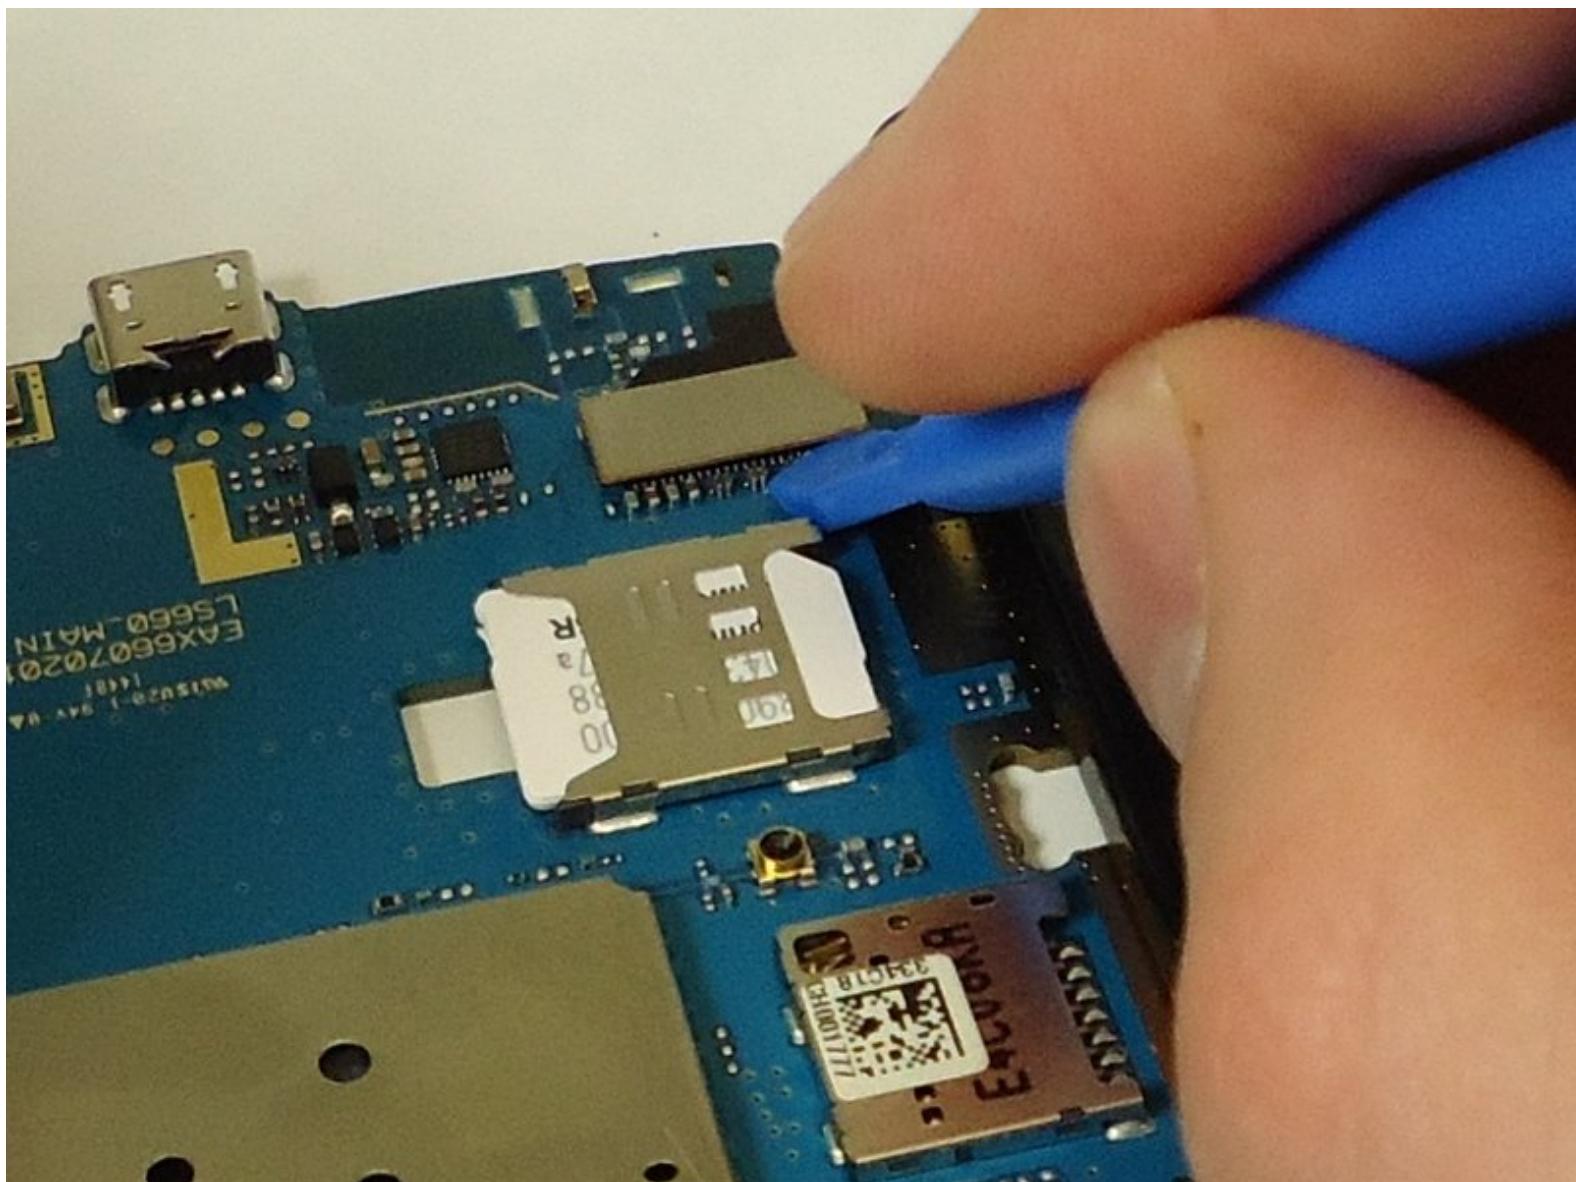

 **TOOLS:**

- [iFixit Opening Tools \(1\)](#)
- [Phillips #000 Screwdriver \(1\)](#)
- [iFixit Opening Picks set of 6 \(1\)](#)

 **PARTS:**

- [LG Tribute Battery \(1\)](#)

Battery

Step 1 — Battery



- Use the plastic opening tool to pry off the back cover.


Step 2



- Lift the battery out of place.


When replacing the battery, the (+) and (-) symbols must match up with the phone's charging nodes.

Step 3 — Mid-panel

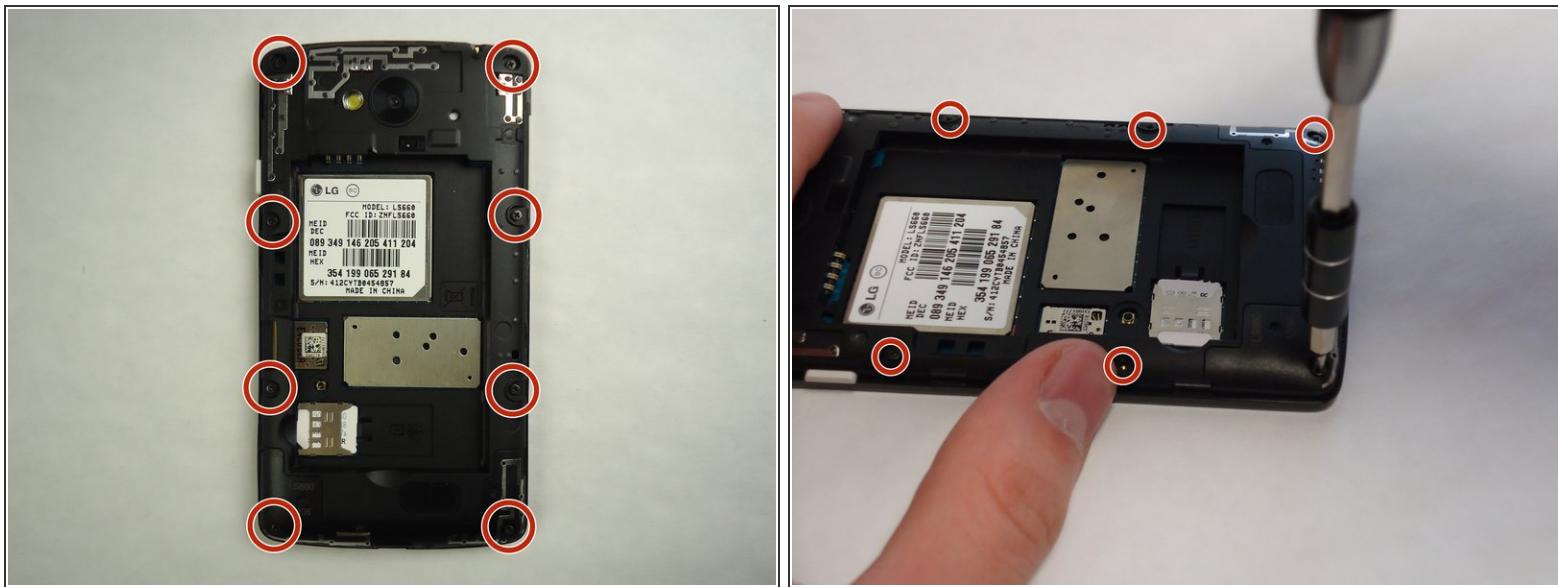

- Remove eight 4mm screws using a Phillips head 000 screwdriver (PH000).


Step 4

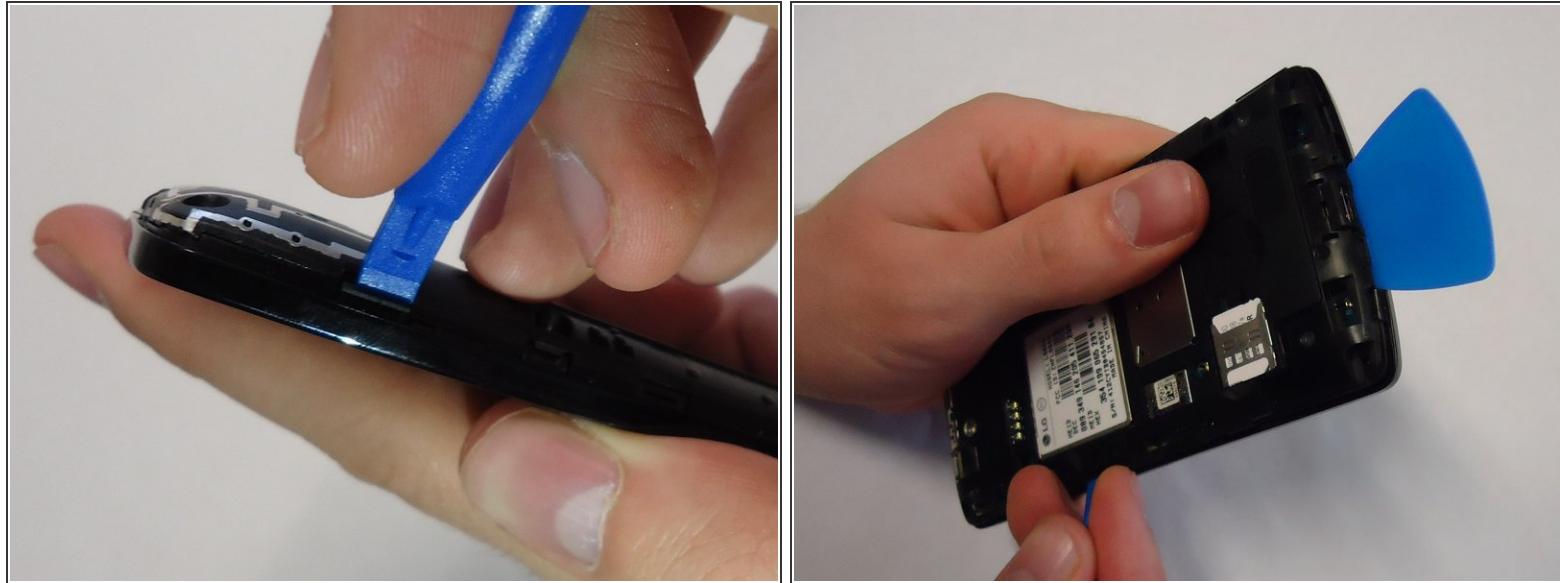

- Use a plastic opening tool to loosen the tabs around the edge of the phone.
- *i* Inserting a thin piece of plastic will help prevent opened tabs from locking back into place.

! This step can be frustrating, but requires patience. Avoid the temptation to pry the panel loose. Using excessive force may break the delicate tabs.

Step 5 — Motherboard

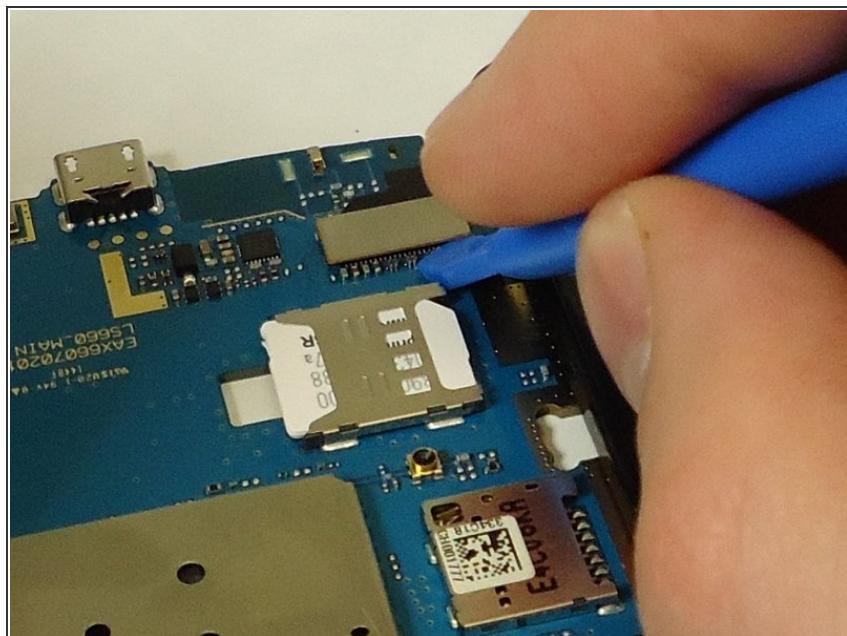

- Use a plastic opening tool to disconnect the touchscreen from the motherboard.
- *i* The motherboard will be completely free from the front panel after this step.

To reassemble your device, follow these instructions in reverse order.