




# LG V30 Plus Battery Replacement

This guide will teach you how to replace the battery in your LG V30 Plus.

Written By: Samuel Jahnke

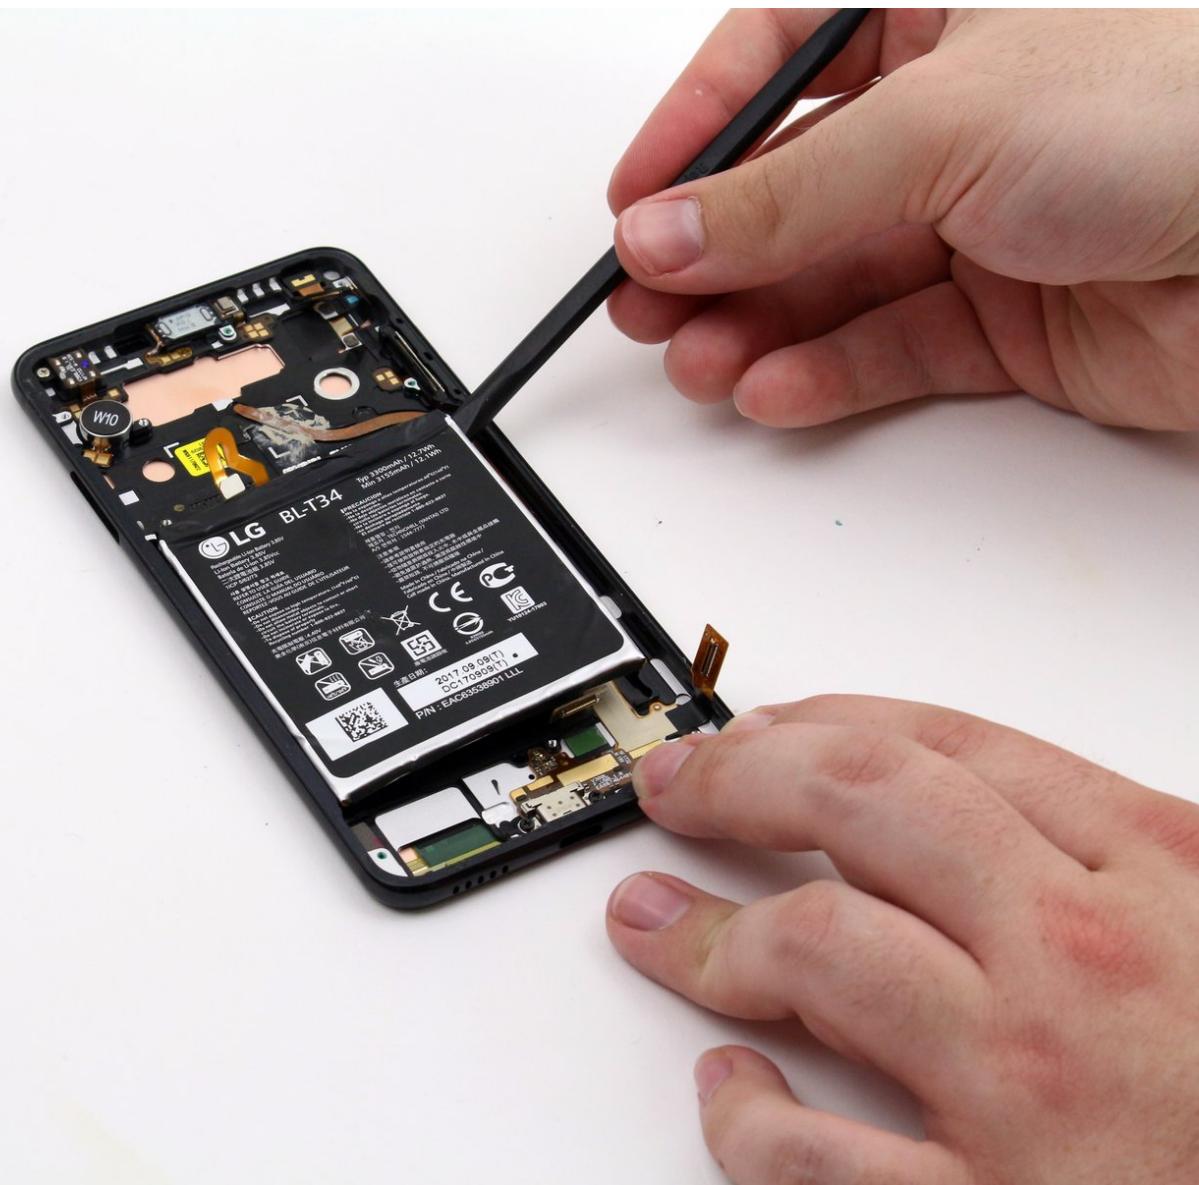

## INTRODUCTION

If your device isn't turning on even after a charge, the battery may be faulty. Before you remove the battery, be advised that there may be a strong adhesive holding the battery with the phone. Use this guide to replace the battery in your device.

### TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [Suction Handle](#) (1)
- [iFixit Opening Tools](#) (1)
- [iFixit Opening Picks set of 6](#) (1)
- [iOpener](#) (1)


## Step 1 — Rear Glass



- Use a pair of iOpeners by heating them in a microwave and placing the hot pads on the edges of the phone.
- Allow to sit for 1-2 minutes to heat up the adhesive.

*(i)* A heat gun may need to be used if you have trouble separating the backing in the next step.

## Step 2

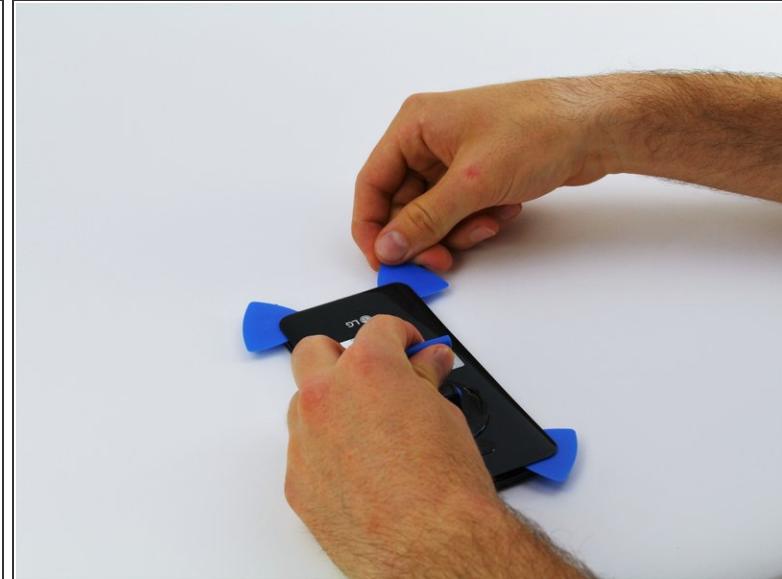

- Insert an Opening Tool into the seam between the rear glass and side of the phone.
- Pry the glass off just enough to insert an Opening Pick.
- Slide the Opening Tool around the edges of the device, placing Opening Picks regularly.

## Step 3




- Once all edges of the device are lifted free, use a Suction Handle to gently pull the rear glass off the device.

## Step 4 — Motherboard




- Remove the ten 4mm screws using the Phillips #00 Screwdriver.

## Step 5

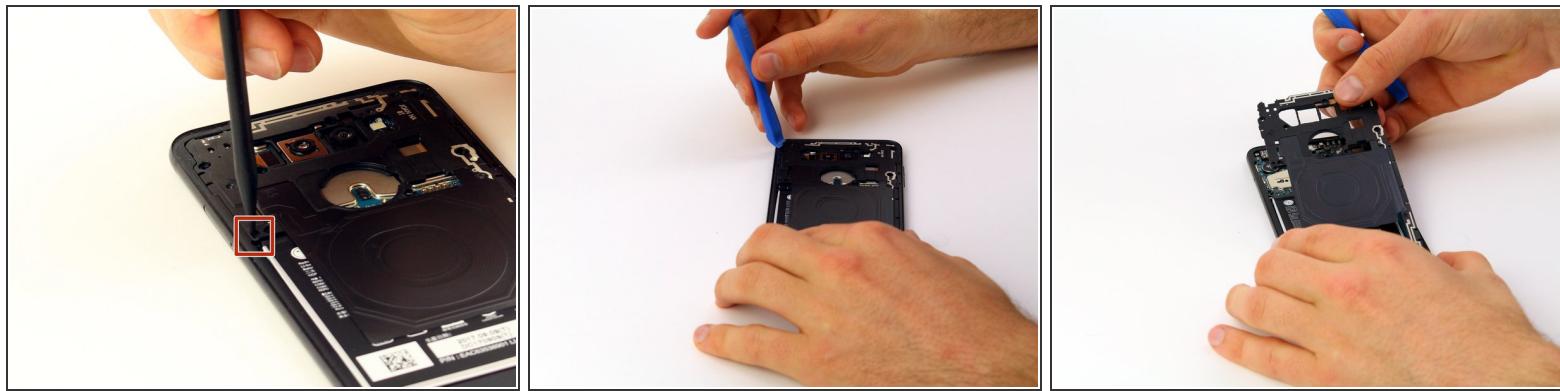

- Gently push down on the small black tab with a Spudger to release the protective board.
- Slide an Opening Tool between the phone and the protective board and slide along the edges of the phone to unclip it.
- Carefully wiggle the board back and forth while gently pulling to unclip the last attachment point.

## Step 6

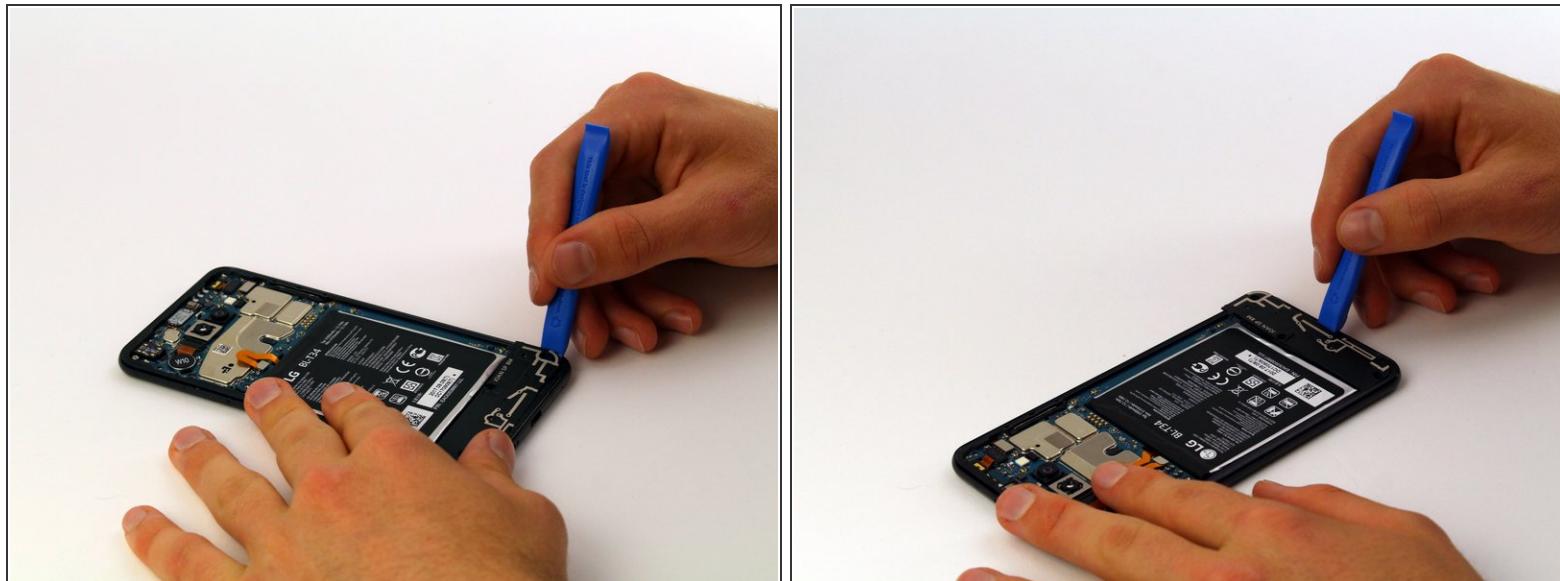

- Slide an Opening Tool between the lower protective board and the phone to unclip.
- Slide the tool along the remaining edges of the protective board until it pops off.

## Step 7



- Gently pry each visible ribbon cable away from the motherboard to disconnect them.

## Step 8



- Gently remove the motherboard from the phone.

## Step 9 — Battery



- Use a Spudger to get between the battery and the phone and pry each edge of the battery away from the board.
- There may be a strong adhesive under the battery, so work your way around the battery carefully and slowly.
- Insert Opening Picks if needed to keep the battery elevated.

To reassemble your device, follow these instructions in reverse order.