




# LG VX4500 Keypad Replacement

Written By: David Foster

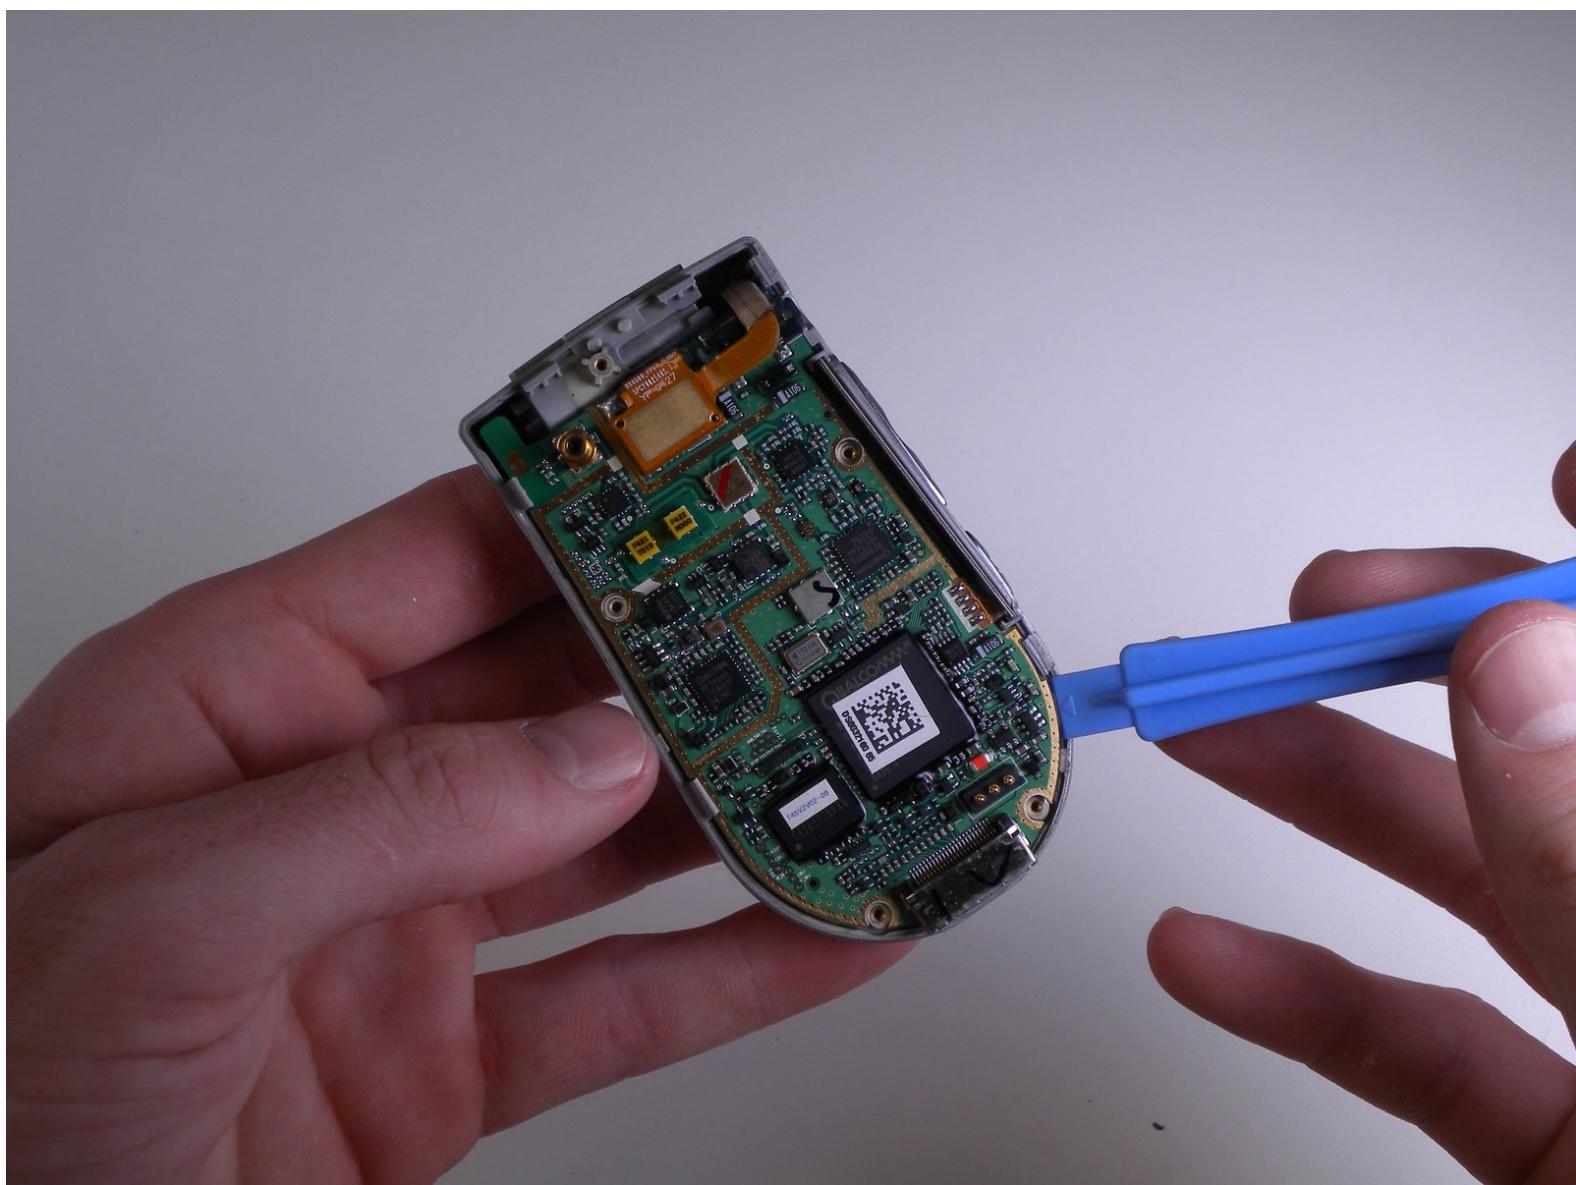

## INTRODUCTION

Replacing the keypad.

### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [Spudger](#) (1)
- [iFixit Opening Tools](#) (1)

## Step 1 — Battery



- Turn the closed phone so that the back panel is facing you.
- Press down and forward firmly on the gray tab in the middle of the phone.

## Step 2



- Now just lift up on the battery and remove it from the phone.

## Step 3 — Rear Cover



- Remove the rubber grommet using a Spudger.


## Step 4



 Be sure not to lose the screws. They are small!

- Remove the five screws using a Phillips #00 Screwdriver.

## Step 5

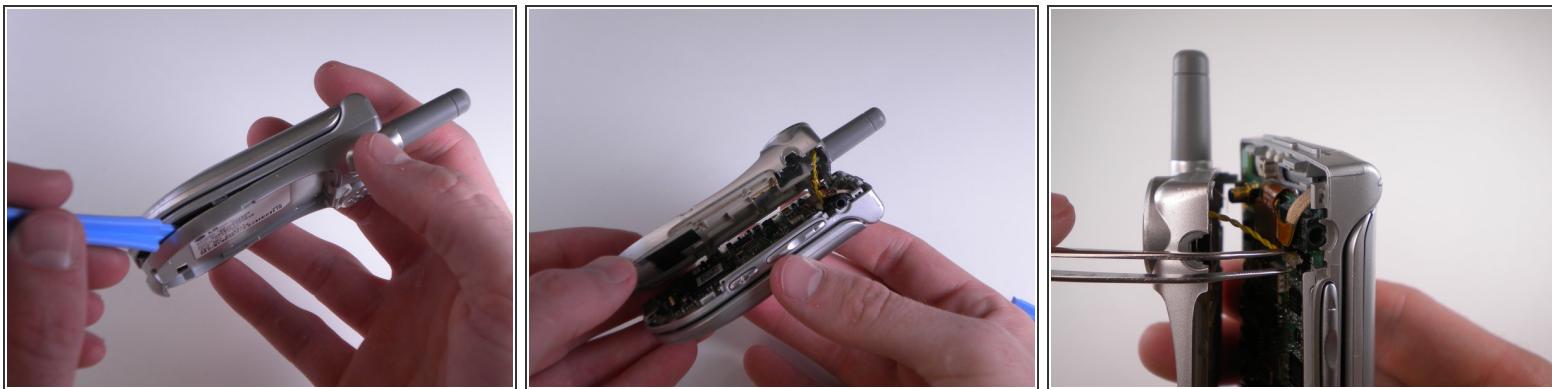

 When removing back cover, be careful not to break the speaker wires.


- Using an iPod Opening Tool, carefully pry off the back cover.
- Using Tweezers, gently pull speaker wires out.

## Step 6




- Separate the two halves.

## Step 7 — Keypad

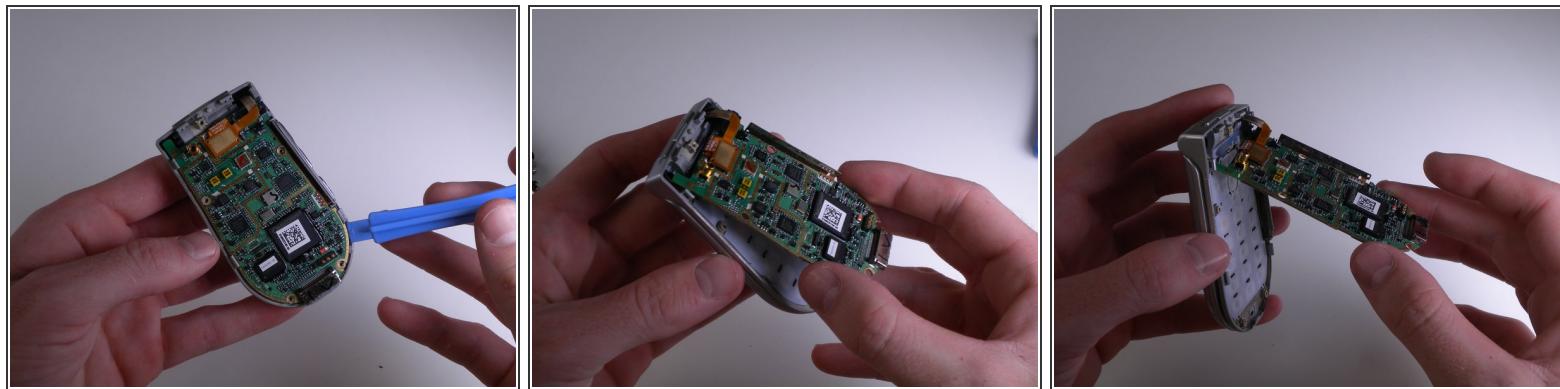


- Carefully pry and lift up on the logic board using an iPod Opening Tool.

## Step 8

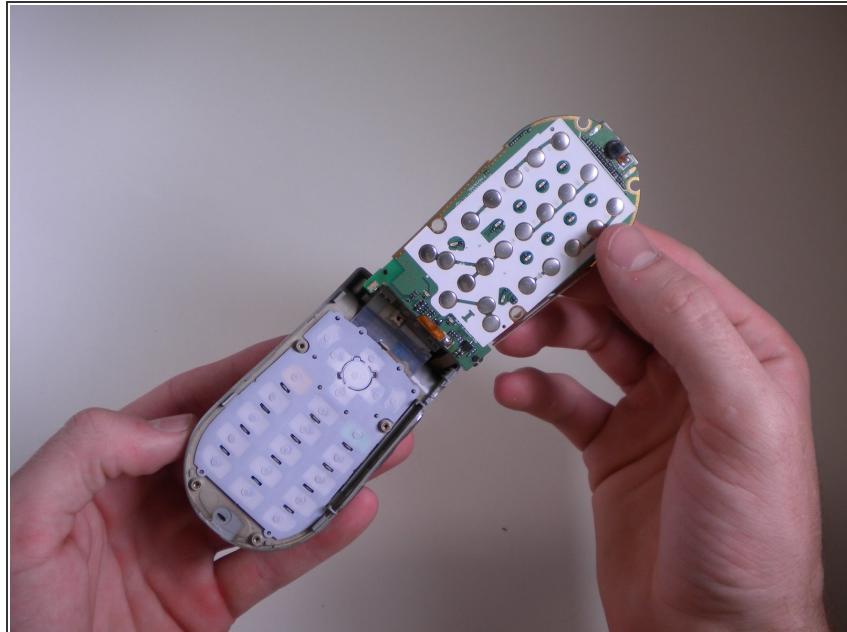

- Carefully flip the logic board up and out of the way.

## Step 9

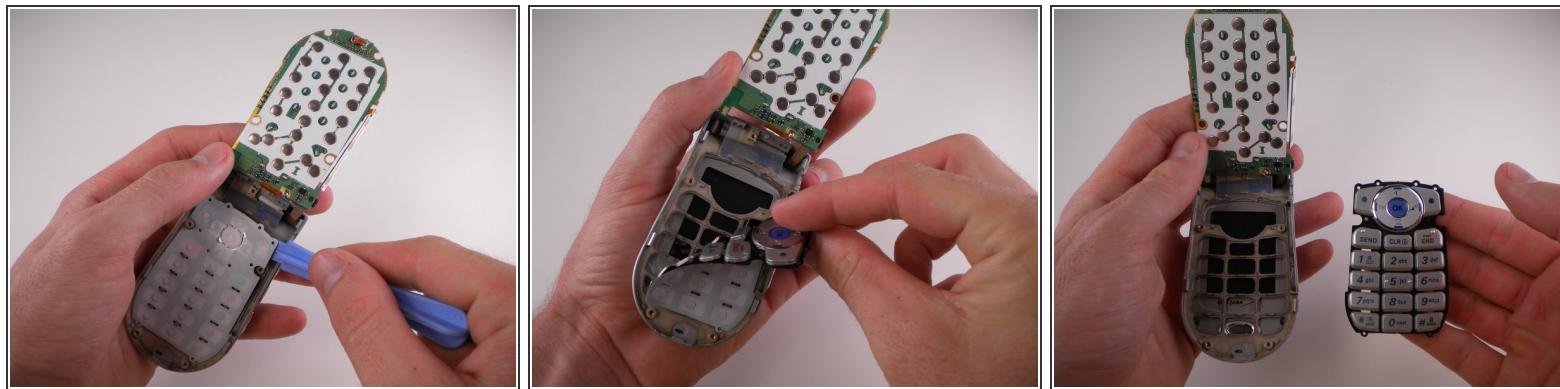

- Use an iPod Opening Tool to lift up on the keypad and pull it out.

To reassemble your device, follow these instructions in reverse order.