



# LG VX5300 Keypad Replacement

Written By: Ashley



Copyright © 2006 PhoneArena.com

## INTRODUCTION

This guide illustrates how to replace the LG VX5300 keypad.

### TOOLS:

- Phillips #0 Screwdriver (1)
- iFixit Opening Tools (1)

## Step 1 — Disassembling Back Cover




- Carefully slide battery cover off in a downward direction.
- Using the plastic opening tool, remove the battery. Light force may be necessary.

## Step 2





- Using a Phillips #0 screwdriver, remove the five screws from the back cover and carefully set them aside.

## Step 3

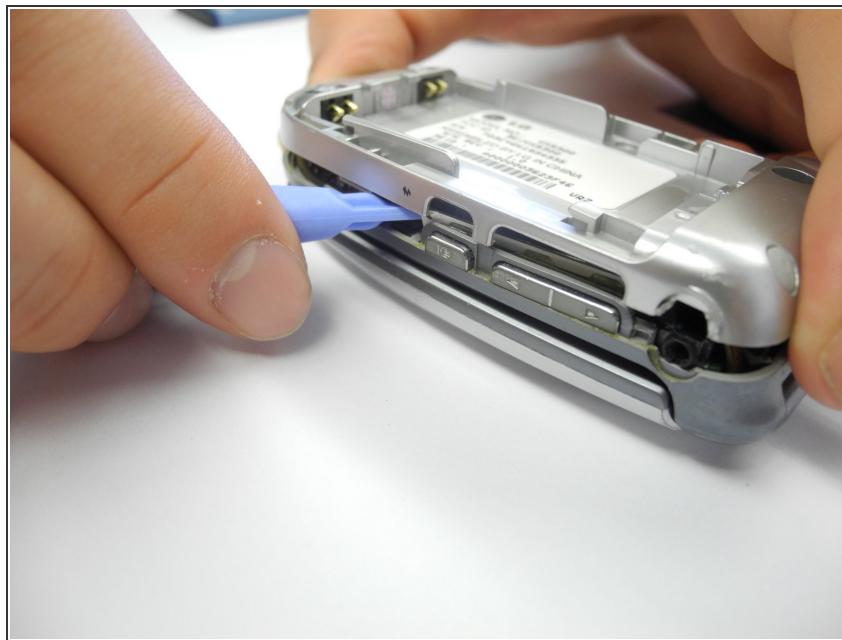

- Using the plastic opening tool, carefully lift the back cover off.


## Step 4 — Keypad

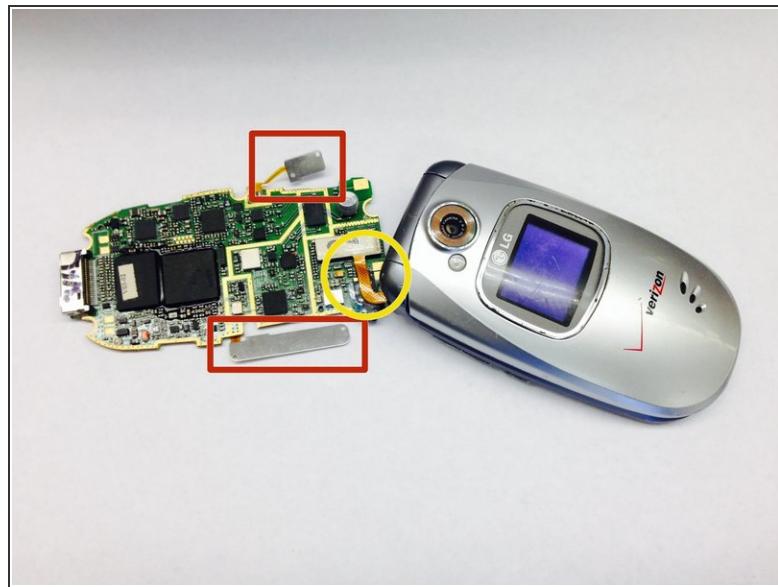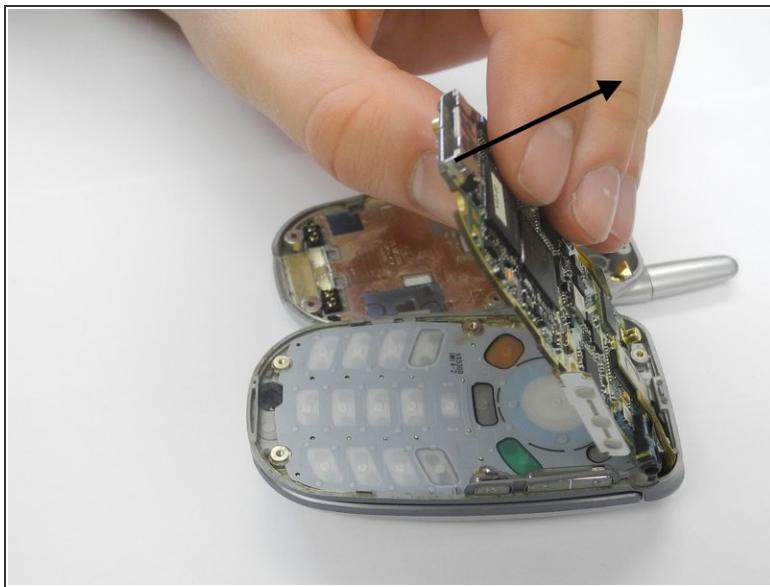

**⚠** Before touching anything inside the phone: it is crucial that you are very cautious when working around the wiring and sensor bars.

- Look to the following photo for the location of the two sensor bars.
- Without disconnecting the orange wire, carefully flip the computer chip over and lay flat on the table, exposing the keypad.


## Step 5

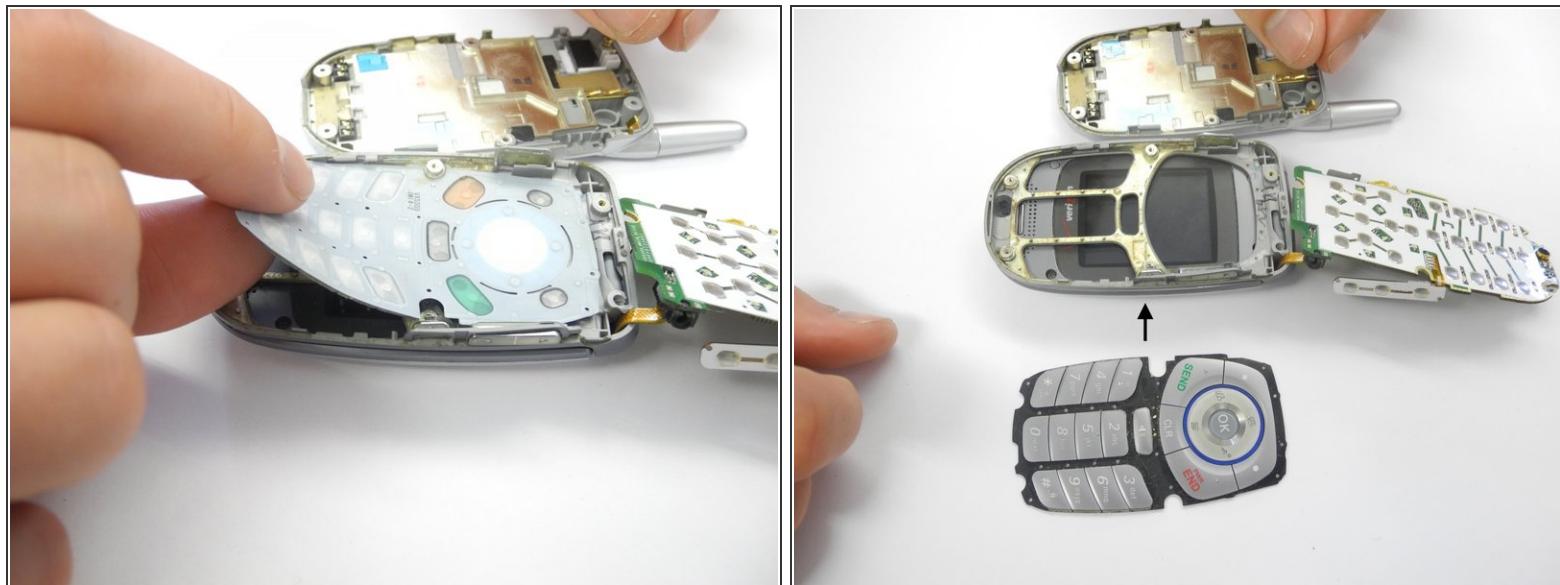

- Carefully remove the keypad and replace with the new keypad.

**⚠** If sensor bars behind the volume and camera buttons fall out, gently put them back in place behind the buttons.

## Step 6

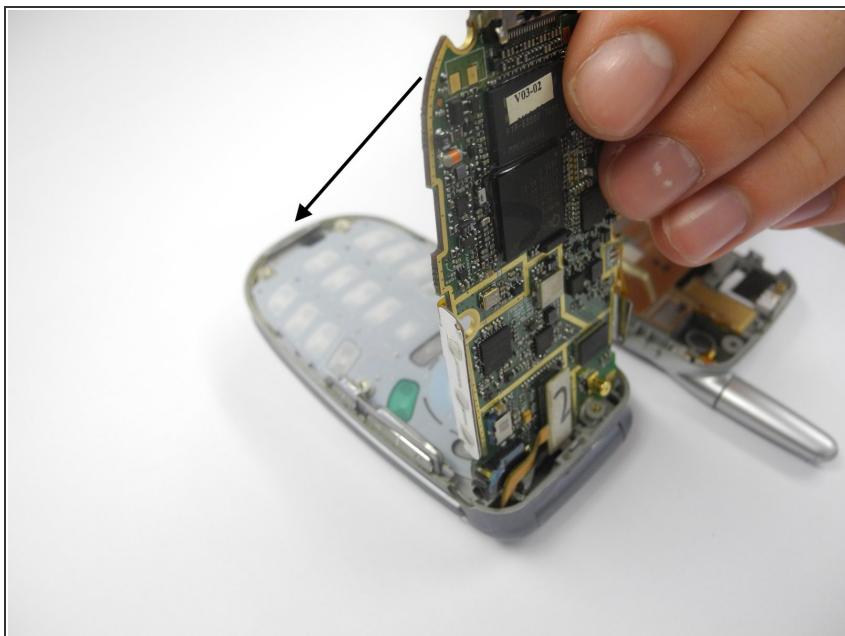

- Carefully set the computer chip back in place.

## Step 7



- Place the back cover back on and secure it with the screws.

## Step 8



- Insert the battery.
- Slide the back cover on the phone.