



LG VX5600 Plastic Screen Protector Replacement

This guide will show you how to install a new plastic screen to the inside cover of your LG VX5600 phone.

Written By: Irena Tran



This document was generated on 2019-10-02 04:20:07 AM (MST).

INTRODUCTION

You will mainly be dealing with the top portion of the phone in this guide. You will only be working with and installing the plastic screen protector in front of the LCD screens.

TOOLS:

- [Phillips #000 Screwdriver](#) (1)
- [Spudger](#) (1)
- [Tweezers](#) (1)

Step 1 — Battery



- Hold your phone with the back casing facing you and the bottom of the phone towards the sky.
- Push down on the cover and slide down to remove. You should only have to apply minimal pressure.

Step 2



- Insert your finger into the small indentation above the battery.
- Push down on the battery and pull it away from the phone; it will pop out.

Step 3 — Plastic Screen Protector



- Use tweezers to remove the two rubber covers found at the left and right corners below the inside screen.

Step 4



- Grasp the phone and rotate it 90 degrees counterclockwise for a better grip.
- Unscrew the two 3.0-mm Phillips #000 screws, found under the rubber covers at the bottom left and right corners.

ⓘ Some of the pictures show the bottom of the phone disassembled. It is unnecessary to disassemble the bottom of the phone for this guide.


Step 5



- Hold the opened phone upright.
- Use the spudger to pry around the edges of the phone and detach the tabs.

ⓘ Make sure all the tabs around the grey cover are detached. They are located on the top and on both sides of the screen.

Step 6

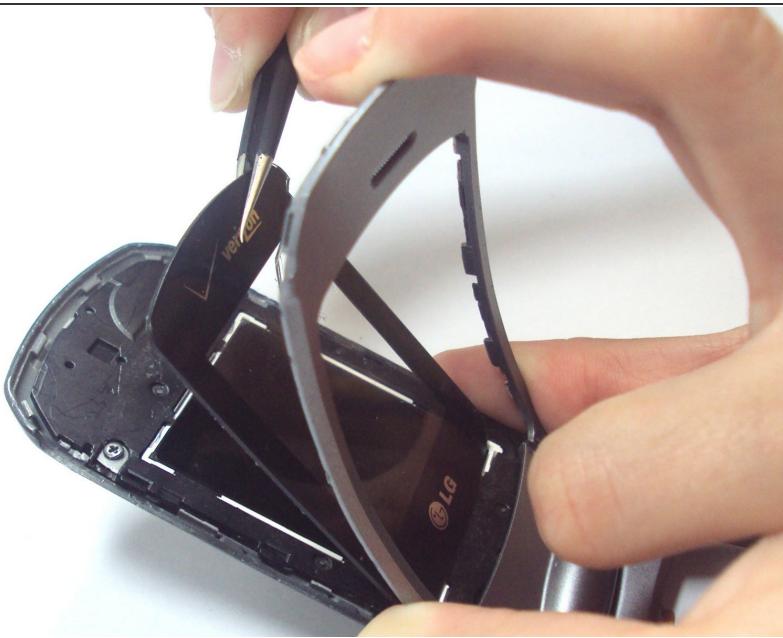

- Use your finger to lift up the grey plastic cover.
- Use the tweezers to grasp the plastic screen, and pull the plastic screen protector up and out of the phone.

i The plastic screen protector is adhered with glue to the back of the phone, so a little force is required to remove it.

To reassemble your device, follow these instructions in reverse order.