



LG VX6000 Body Replacement

Written By: Barrett Wallace



INTRODUCTION

This guide is for dismantling the body of the LG VX6000, a step that is required for many other repairs

TOOLS:

- [Phillips #1 Screwdriver](#) (1)
- [Tweezers](#) (1)

Step 1 — Battery



- Locate the dark gray tab on the back of the phone towards the top. Push the tab towards the top of the phone to release the battery.

Step 2



- Remove the battery by lifting up and rotating the battery away from the bottom edge.

Step 3 — Body



- Pull out the two rubber cushions located on the top of the phone using tweezers.


i Only remove the two cushions that are circled!

Step 4



- Unscrew the six screws seen on the back using a Phillips 00 Screwdriver.
- Remove screws and carefully place on an uncluttered surface or in a small container.

Step 5

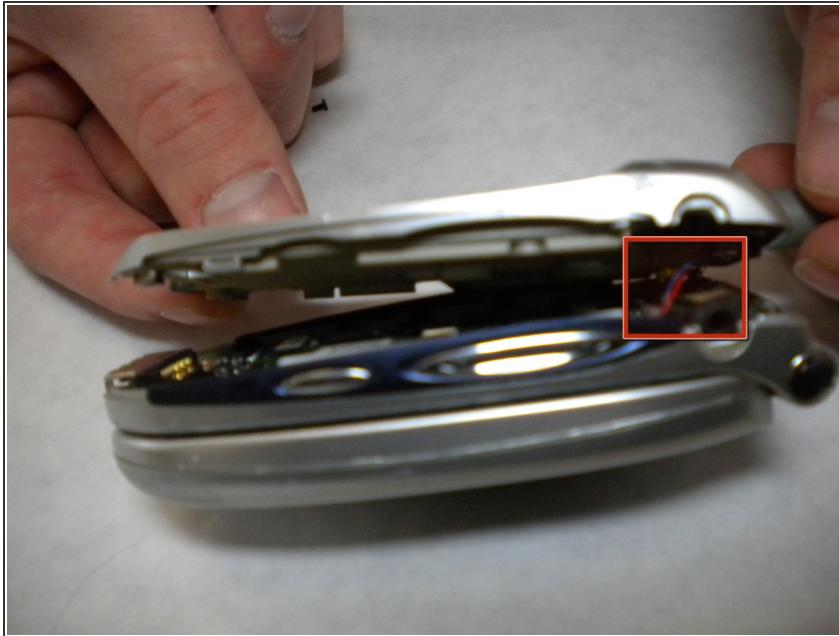

- Carefully remove the back of the phone gently using your fingernails or tweezers.

 There are a pair of red and blue wires that plugs into the motherboard. These wires will snap if you force the pieces apart.

 To reattach the back, you must plug these wires back in.