



# LG VX7000 External LCD Display Replacement

Written By: Nichole Shaw



## INTRODUCTION

Sat on your phone and cracked the outer screen? Replace it.

NOTE: Replacing the outer screen requires replacing the entire outer casing.

### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)


## Step 1 — External LCD Display



- Using Tweezers, remove 4 rubber screw covers.
- Remove screws located under rubber plugs using the screwdriver by turning counterclockwise.

**i** NOTE: Screws will not come completely out of phone.

## Step 2

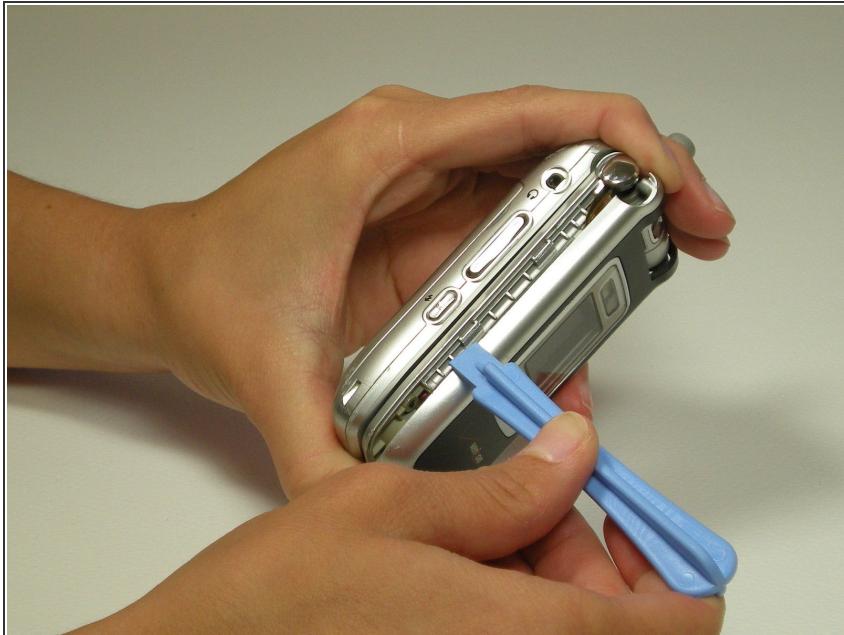

- Using the iPod Opening Tool, pry the face plate off the front of the phone.

**i** NOTE: There will be a significant amount of resistance to removing the face plate from the phone.

- Align new face plate where cracked face plate previously was.

To reassemble your device, follow these instructions in reverse order.