




LG VX7000 Keypad Replacement

Written By: Nichole Shaw

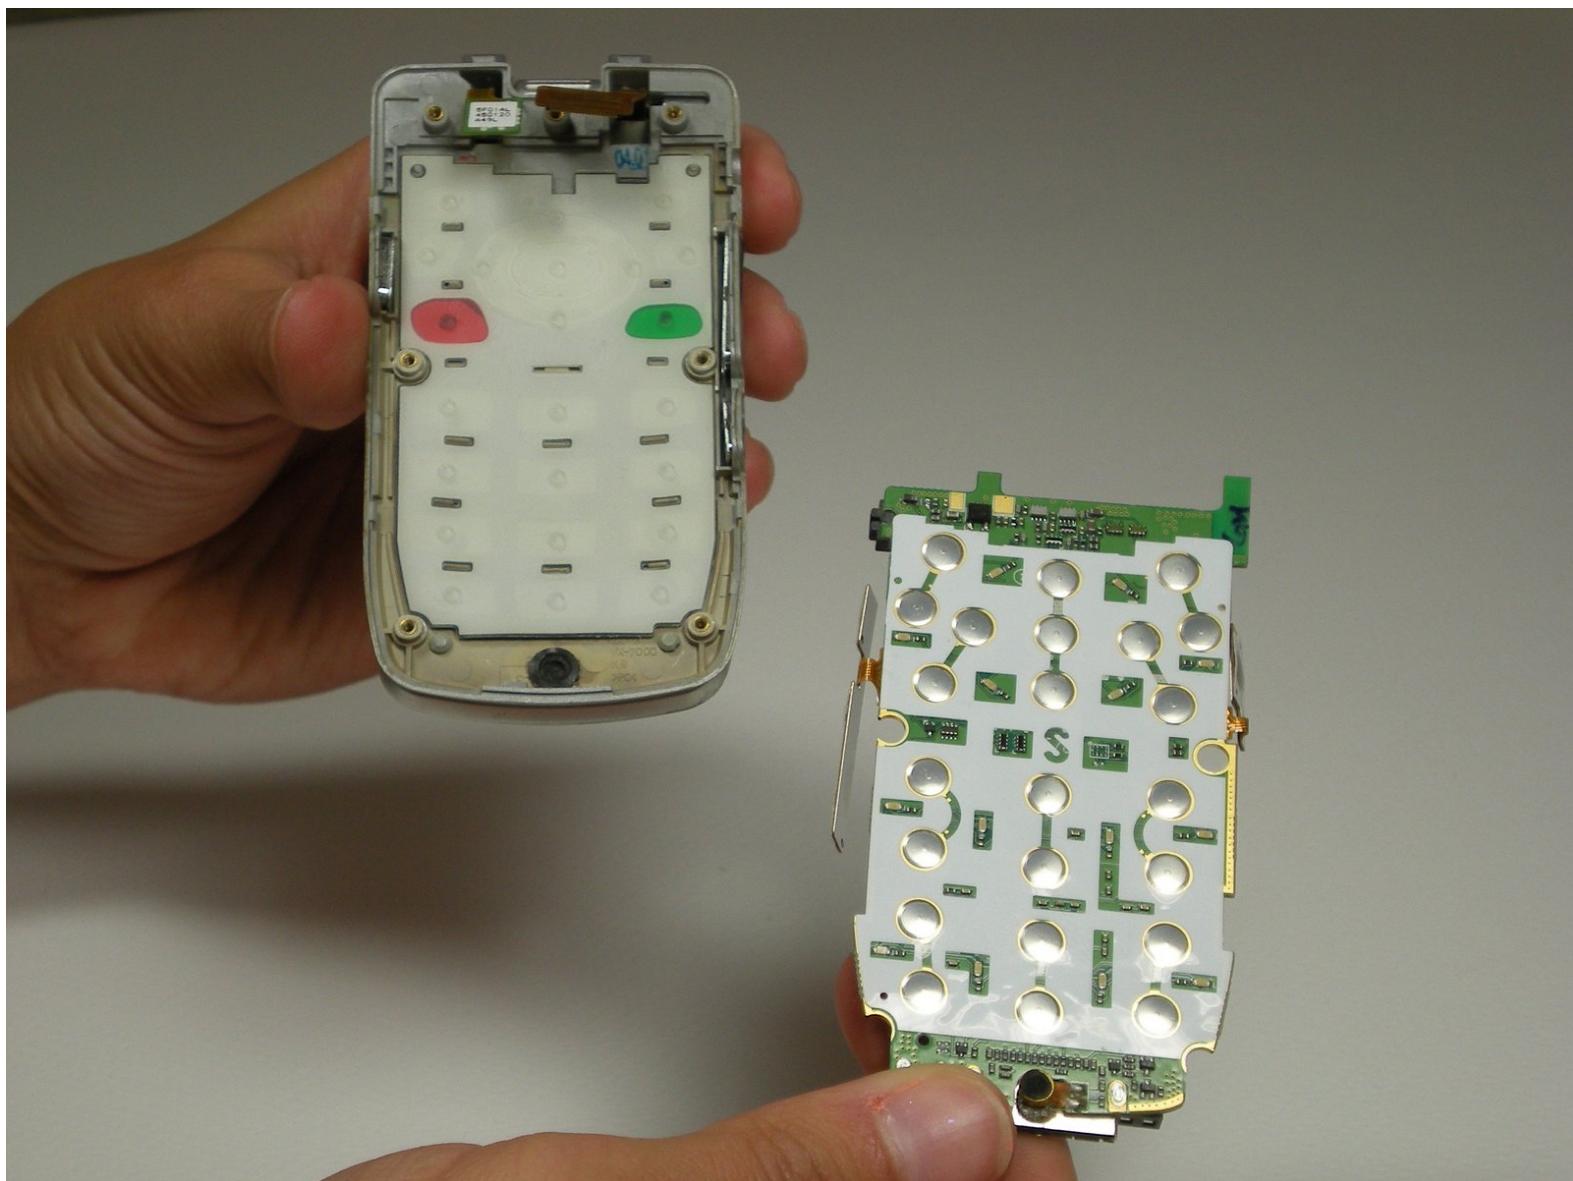

INTRODUCTION

Replace damaged keypad.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)

Step 1 — Battery



- Lay the phone face down with the screen in palm of hand.
- Slide the grey button towards the top of the phone.

Step 2



- While the button is slid up grab the battery on the sides and pull up with the bottom remaining in place.
- Pull the battery up vertically to completely remove from phone.

Step 3 — Keypad



- Locate four screws underneath of the battery.
- Remove screws by turning counter clockwise with screwdriver until they pop out.


Step 4



- Place fingers on bottom of phone near charger adapter and pry back half of bottom apart.


(i) Note: There will be a significant amount of resistance.

Step 5

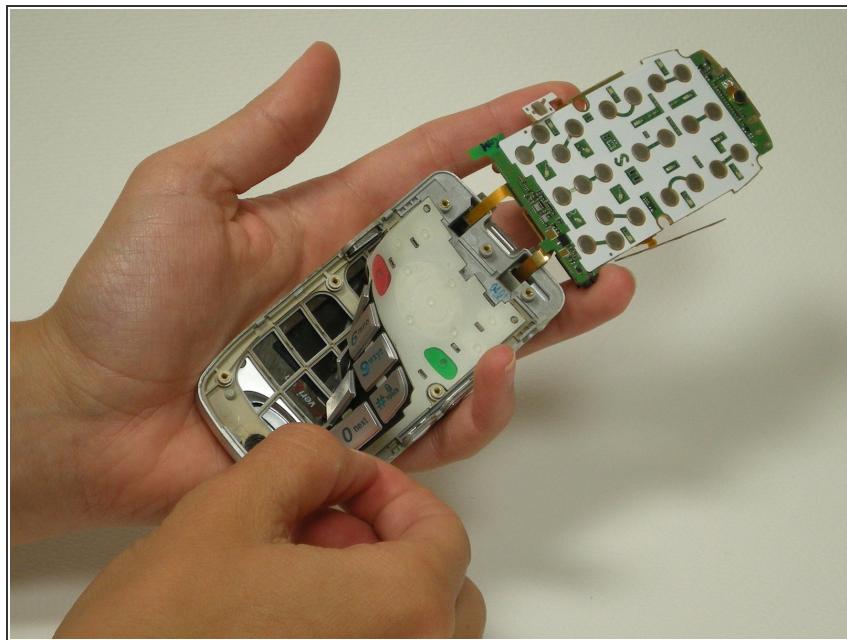

- Lift up logic board without completely removing from phone.
- Remove entire keypad from beneath the logic board.

Step 6

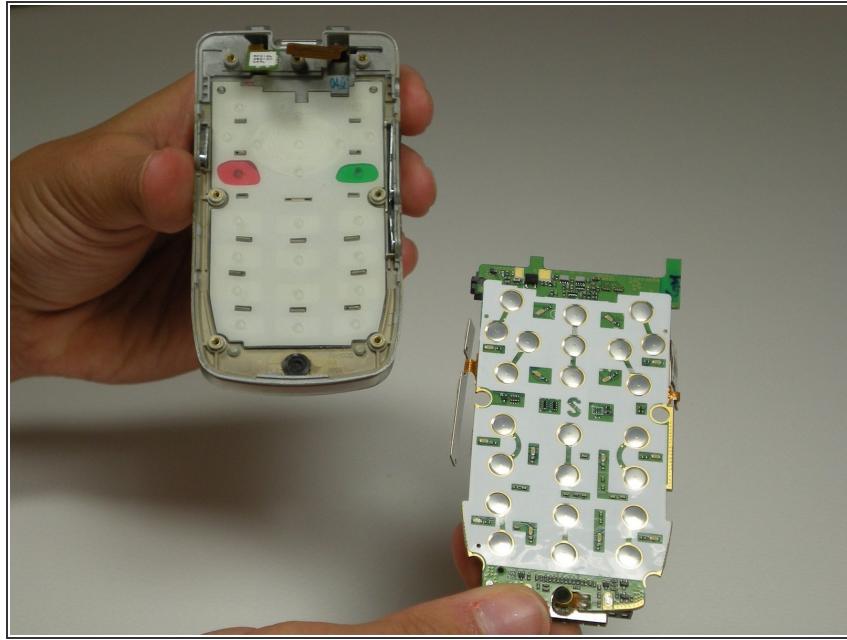

- Insert replacement keypad with buttons aligned in proper holes.

To reassemble your device, follow these instructions in reverse order.