




# LG VX7000 Logic Board Replacement

Written By: Nichole Shaw

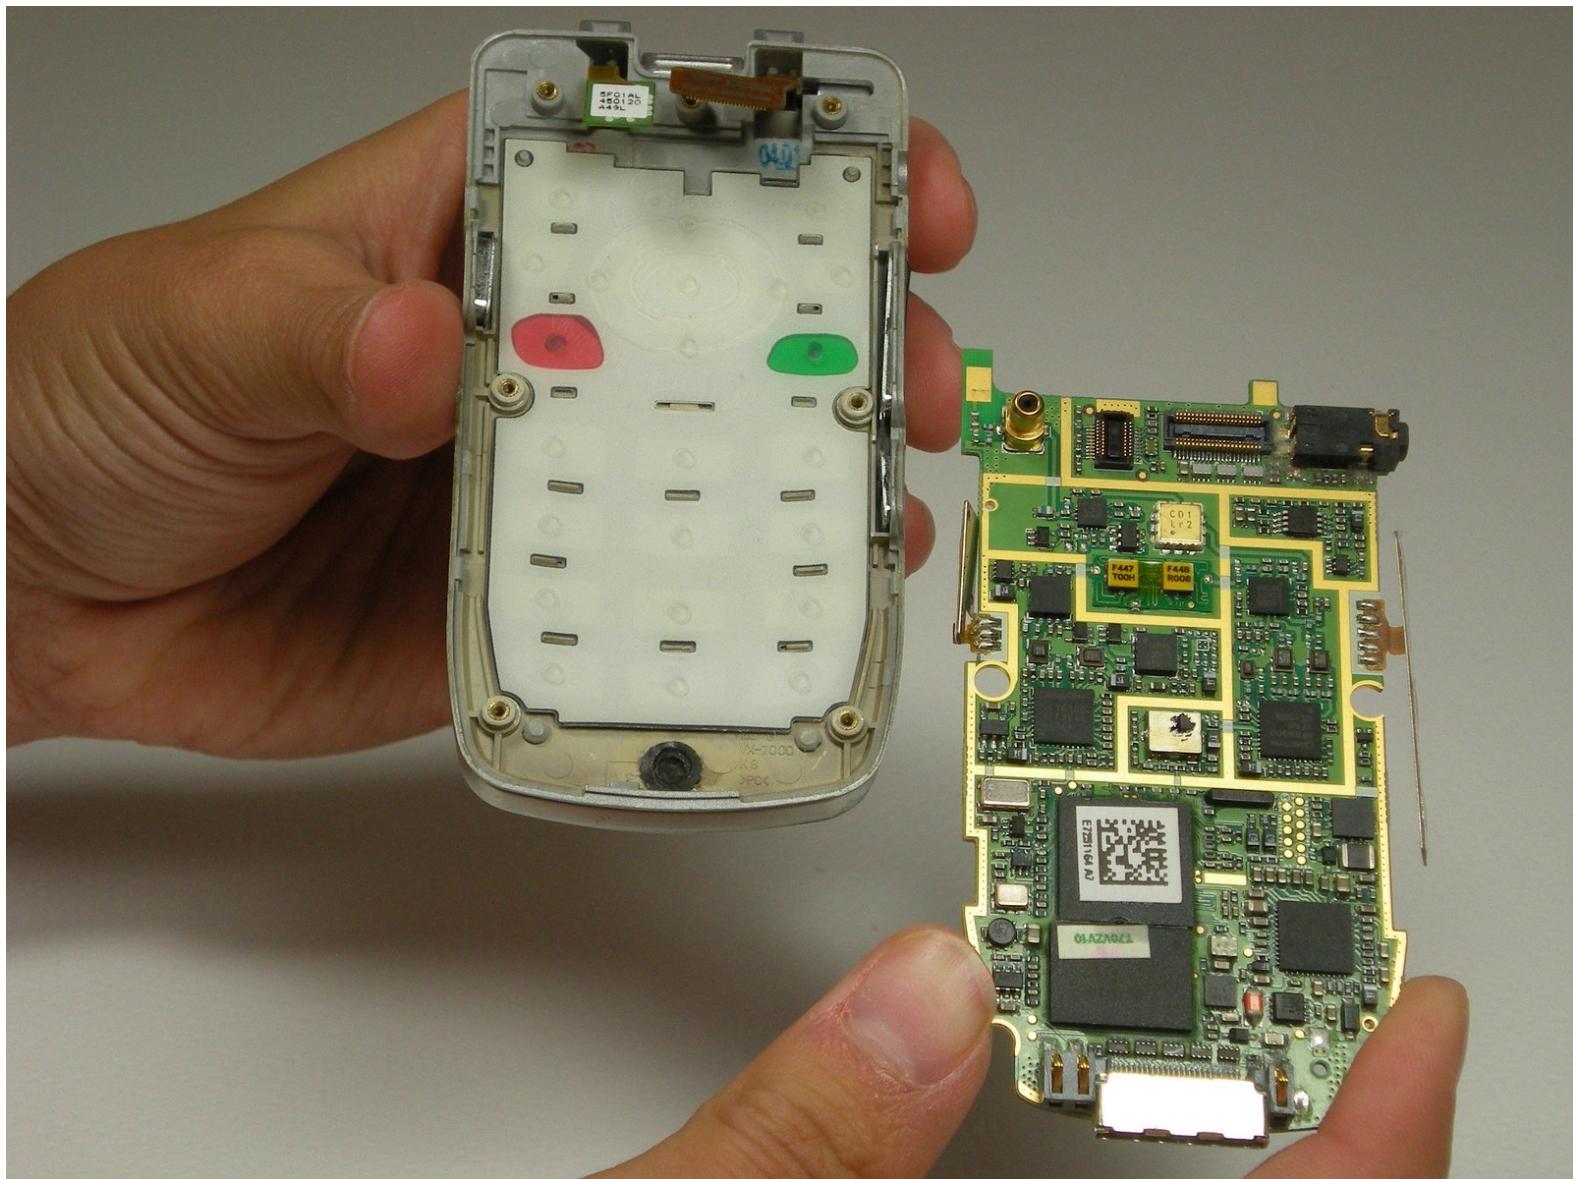

## INTRODUCTION

Phone lacking intelligence? Replace your logic board.

### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [Tweezers](#) (1)

## Step 1 — Battery



- Lay the phone face down with the screen in palm of hand.
- Slide the grey button towards the top of the phone.

## Step 2



- While the button is slid up grab the battery on the sides and pull up with the bottom remaining in place.
- Pull the battery up vertically to completely remove from phone.

## Step 3 — Logic Board



- Remove four screws beneath battery using screw driver.
- Remove three rubber screw covers with tweezers.
- Remove the three screws under the covers with the screwdriver.


## Step 4



- Detach outer casing from back of phone.


***i*** NOTE: There will be a significant amount of resistance to detaching the back casing.

## Step 5

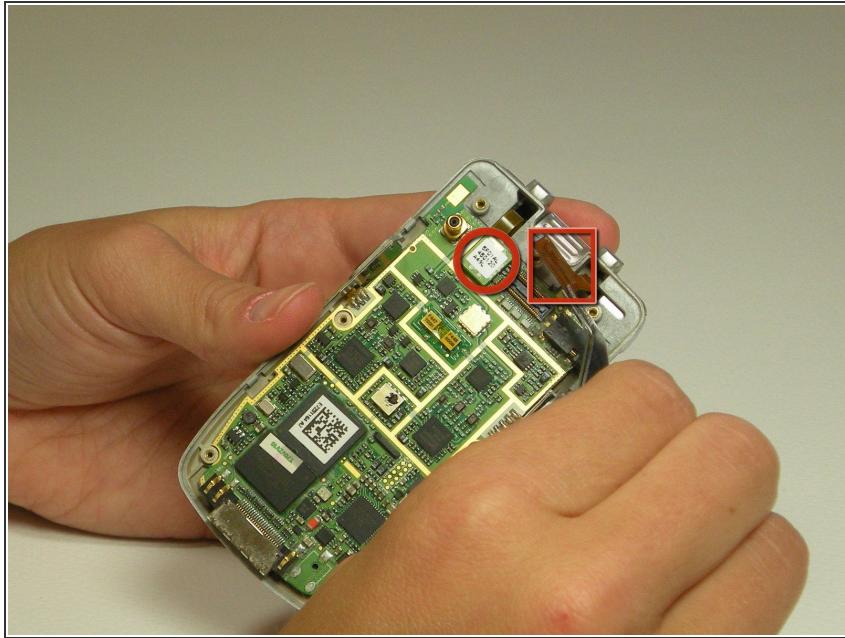

- Unsnap gold rectangular plate and silver square plate from the logic board.

## Step 6

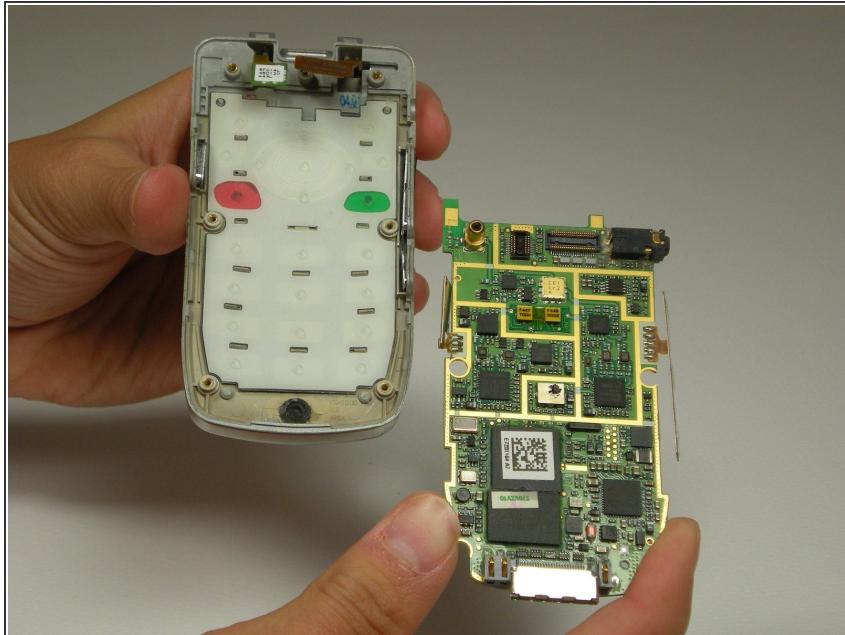

- Remove logic board, being careful not to remove any other pieces.
- Insert new logic board with white side facing down.

***i*** NOTE: Make sure side buttons on logic board are correctly aligned to avoid future complications.

To reassemble your device, follow these instructions in reverse order.