



LG Volt LS740 Charging Port Replacement

Guide to replace LG Volt LS740 Charging Port

Written By: SMcC21985



INTRODUCTION

Found this in the bottom of a closet and through some troubleshooting decided the charging port was broken.

Couldn't find any instructions here so I'm uploading some.

Please Ignore the goofy white borders, forgot to consider aspect ratio when taking the pictures

TOOLS:

- Phillips #0 Screwdriver (1)
- iFixit Opening Tools (1)

PARTS:

- LG Volt Charging Port (1)

Step 1 — Power off and Unplug Phone



- Always power off and unplug your devices before servicing them.

Step 2 — Remove Rear Cover




- There is a pry tab you can use your fingernail or a pry tool to remove the rear cover.

Step 3 — Remove Battery & Sim Card



- Note the location of the screws to remove the inner rear panel.

Step 4 — Remove Inner Rear Cover

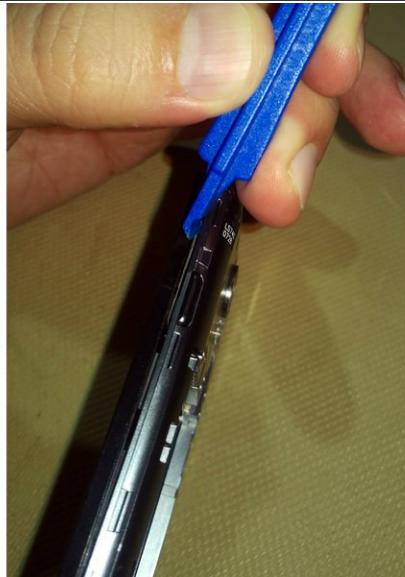

- Remove the 11 screws on the inside rear cover using your Phillips screw driver.
- See photo from "Remove Battery" step for location of screws.
- Use your pry tool and carefully work your way around the inside rear cover to undo the snaps and remove it.

Step 5 — Remove Charing Port / Daughter Board



- Disconnect the 3 cables and two screws before attempting to remove the charging port circuitry.
- **Beware the adhesive on the back!**

To reassemble your device, follow these instructions in reverse order.