



Leapfrog LeapPad 3 Battery Replacement

If the battery inside your LeapPad 3 is dead, it may need to be replaced.

Written By: Matt Irvine



INTRODUCTION

To replace the battery you will need a replacement. Once you have the battery, following this guide will lead you to a fully functioning device.

TOOLS:

- [iFixit Opening Tools](#) (1)
- [Phillips #0 Screwdriver](#) (1)
- [Anti-Static Wrist Strap](#) (1)

Step 1 — Battery



- Before taking apart your device, ensure that it is turned off and that your anti-static wrist strap is secured to a ground.
- Remove the six 10.0 mm Phillips #0 screws from the outer case and remove the cover with your hands.

(i) You will not need to pry the case off.


Step 2



- Unplug the battery from the motherboard with your hands.

(i) The battery sits to the right of the motherboard.

Step 3

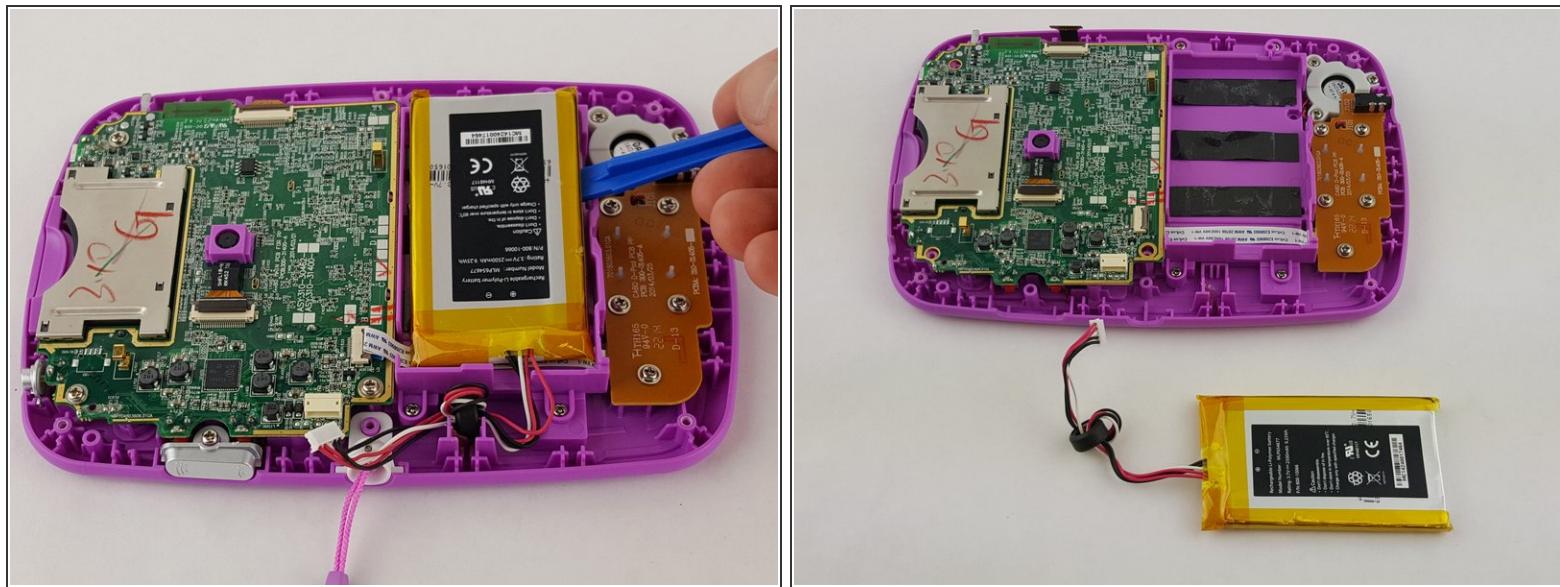

- Pry the battery gently off of the plastic platform with an opening tool.

⚠ Do not puncture the battery, as the material inside can be dangerous.

To reassemble your device, follow these instructions in reverse order.