



Written By: Whitney Hurd






TOOLS:

- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Back Panel

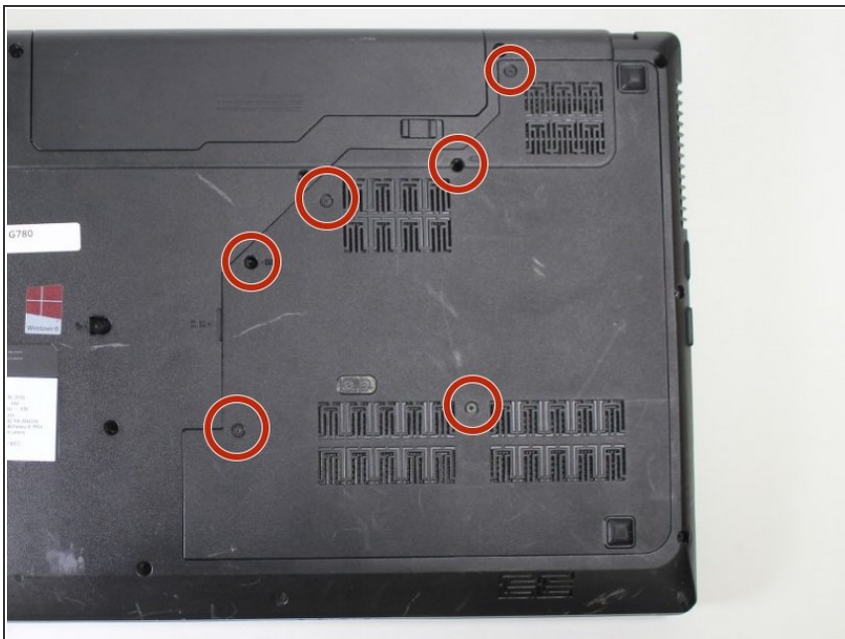

- Using a #0 Phillips screwdriver, remove the six 9mm panel screws from the bottom of the device.

Step 2



- Remove the back panel.

To reassemble your device, follow these instructions in reverse order.