Lenovo IdeaPad Z570 Screen Replacement

In following this guide you will be able to replace a defective or broken LCD screen in your Lenovo IdeaPad Z570.

Written By: Daniel Lopes

This document was generated on 2020-02-10 02:16:37 PM (MST).

INTRODUCTION

In order to proceed with this guide, you should know that the laptop must not be plugged in for safety reasons. The laptop should also be powered off and the battery drained. Once completed, safely dispose of the old screen.

🔧 TOOLS:

- Phillips #0 Screwdriver (1)

This document was generated on 2020-02-10 02:16:37 PM (MST).

Step 1 — Battery

- Place the laptop face down with the battery facing away from you

Step 2

- Flip the right switch right-bound

This document was generated on 2020-02-10 02:16:37 PM (MST).

Step 3

- Hold the left switch.

Step 4

- Push the battery forward lightly to remove it while holding the left switch.

This document was generated on 2020-02-10 02:16:37 PM (MST).

Step 5 — Screen

- Open up the laptop with the screen facing you.

Step 6

- Remove the two rubber square screw covers located in the left and right lower hand corners of the screen.

This document was generated on 2020-02-10 02:16:37 PM (MST).

Step 7

- Unscrew the two 4 mm screws behind the two rubber screw covers using the Phillips #0 screwdriver.
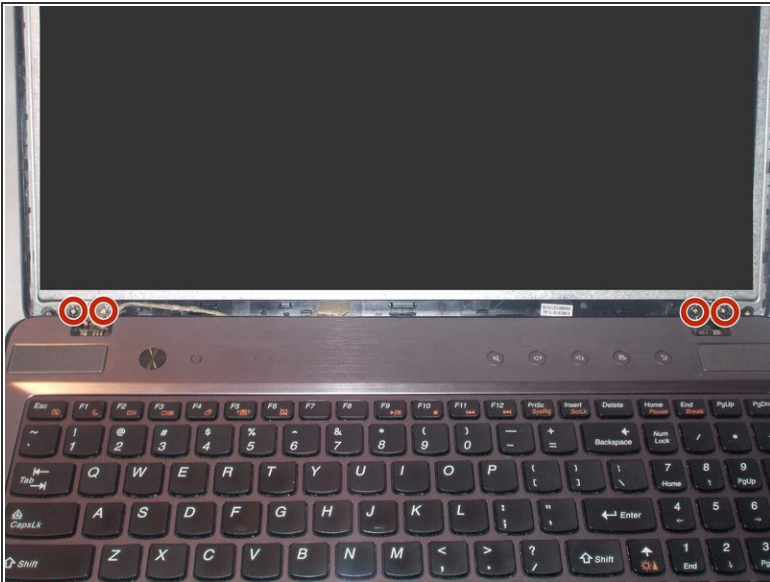
Step 8

- Using the opening tool, pry open the plastic screen border, beginning with the upper right hand corner then working your way around.

- Pry off the screen cover from the device.

This document was generated on 2020-02-10 02:16:37 PM (MST).

Step 9

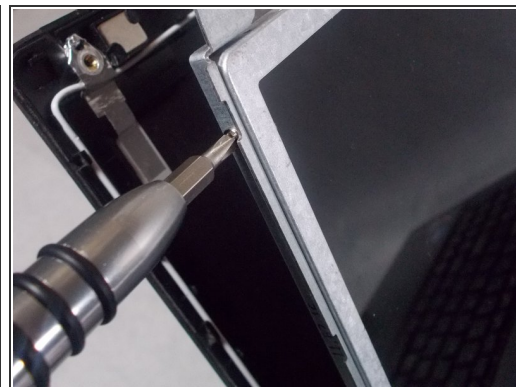- Remove the two 2 mm screws at the top two corners of the screen using the Phillips #0 screwdriver.

Step 10

- Loosen the four 2 mm screws located at the bottom corners of the screen.

- ⓘ These screws cannot be removed.

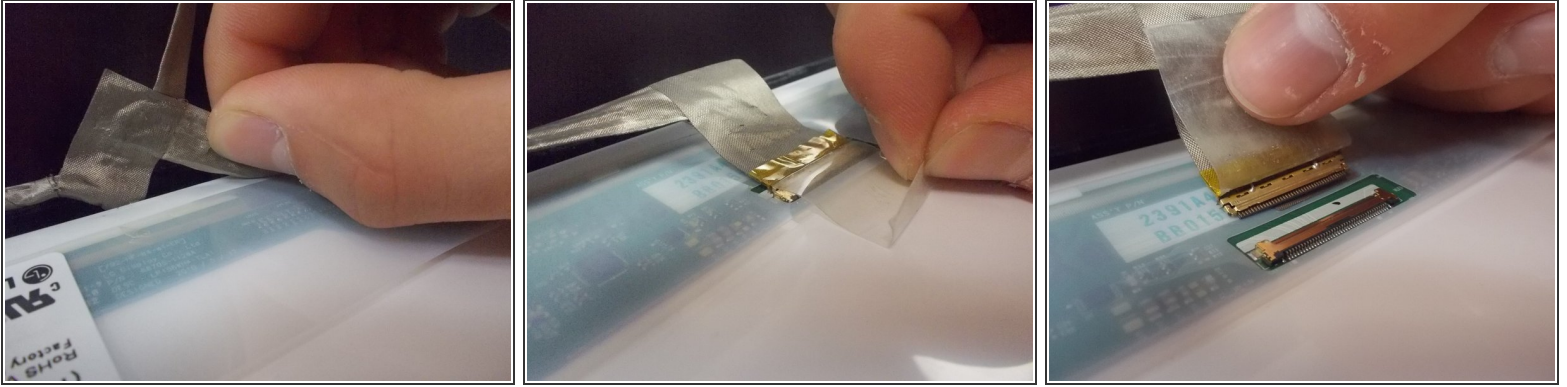This document was generated on 2020-02-10 02:16:37 PM (MST).

Step 11

- Tilt the screen forward gently.

- Remove four 3 mm screws on the sides of the brackets holding the screen (two on the left side and two on the right side) using the Phillips #0 screwdriver.

Step 12

- Lean the LCD screen face-down on the keyboard gently.

       www.iFixit.com

Step 13

- Gently remove the adhesive covering surrounding the wires that's connected to the back of the screen.

- Disconnect the plug from the connection terminal.

- Remove the screen completely.

To reassemble your device, follow these instructions in reverse order.

This document was generated on 2020-02-10 02:16:37 PM (MST).