




Lenovo Miix 2 Speakers Replacement

Replace the speakers in your Lenovo Miix 2

Written By: Diana Chiu

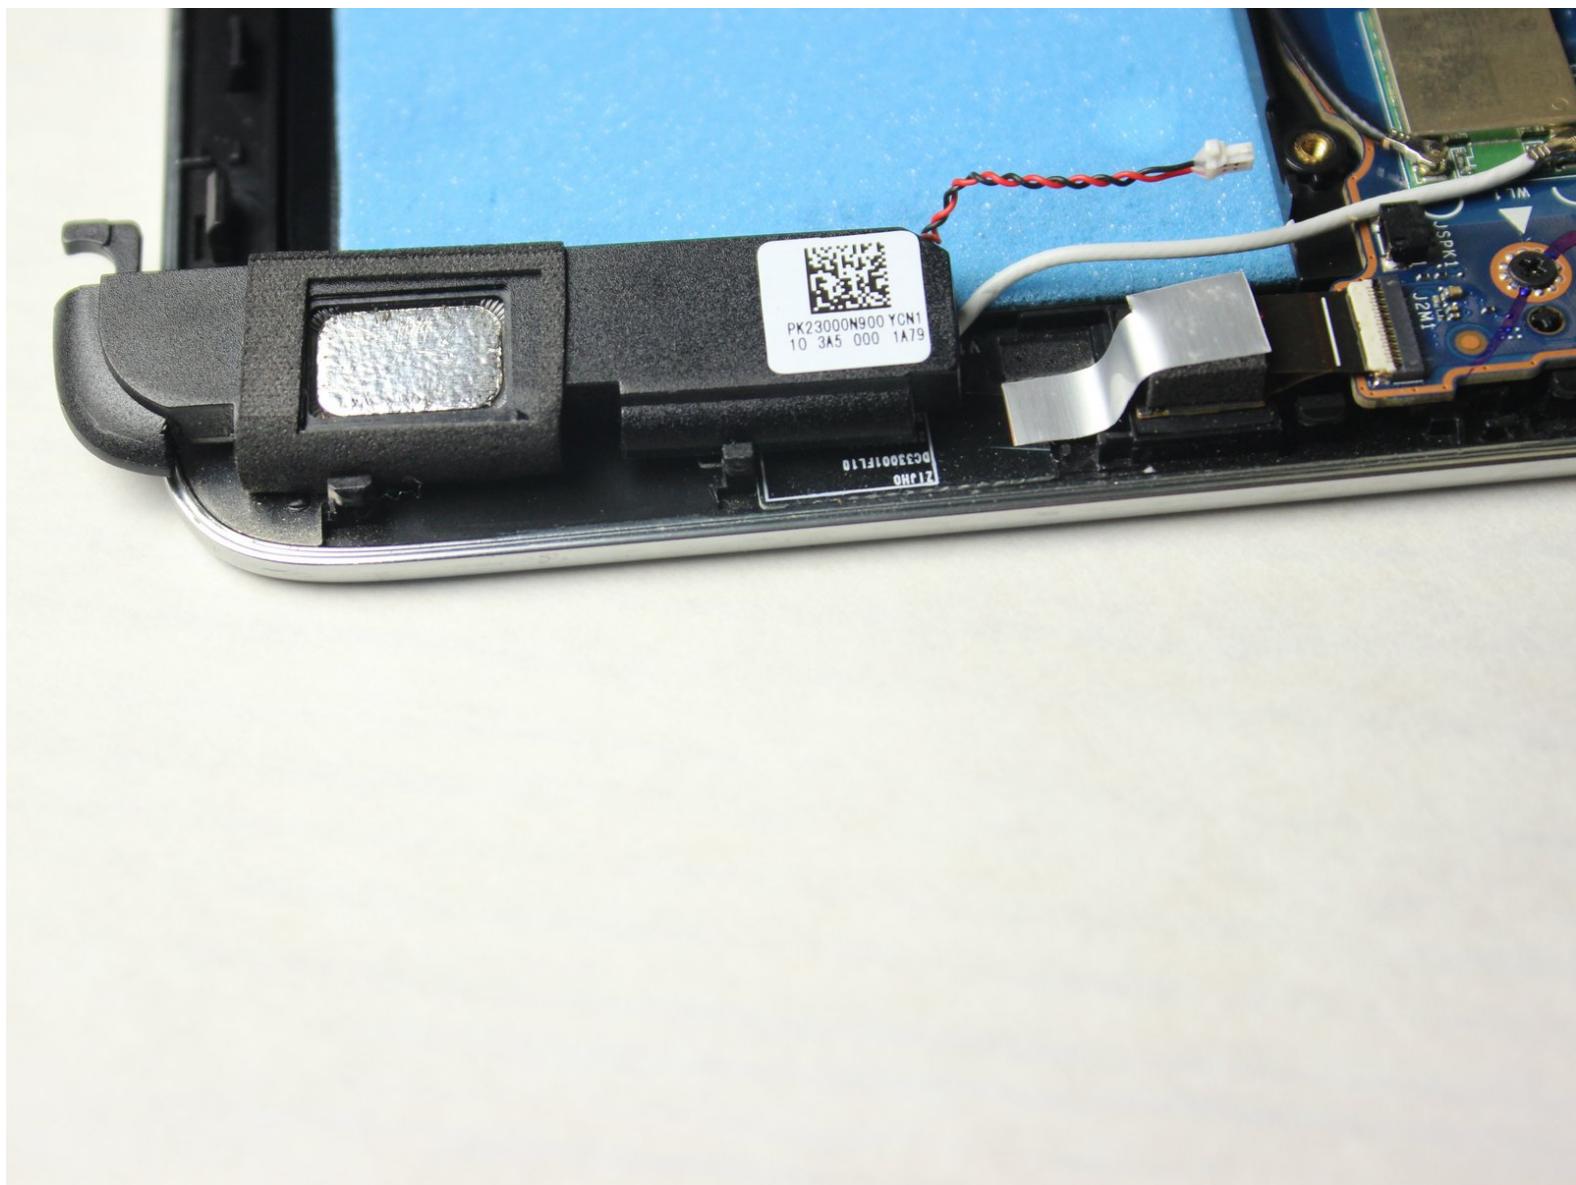

INTRODUCTION

Learn how to remove the speakers from the Miix 2 in a few, quick steps.

TOOLS:

- [Metal Spudger \(1\)](#)
- [Spudger \(1\)](#)
- [JIS #0 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [Tweezers \(1\)](#)

Step 1 — Battery



- Remove the back cover of the tablet by inserting a nylon or metal spudger in the small hole between the screen and rear cover near the volume button. Slide the tool along the edge of the tablet to release the internal clasps.

i You should have to apply a good amount of force, but pry carefully in order to avoid damaging the clasps or the internals.

Step 2



- Unscrew the six 3mm screws surrounding the battery dock using a Phillips #0 screwdriver.

Step 3





- Using a plastic spudger, slowly push each side of the battery connector (back and forward a couple of times) out of its socket on the motherboard.

Step 4



- Remove the battery by prying up with your fingers or a plastic opening tool.

Step 5 — Speakers

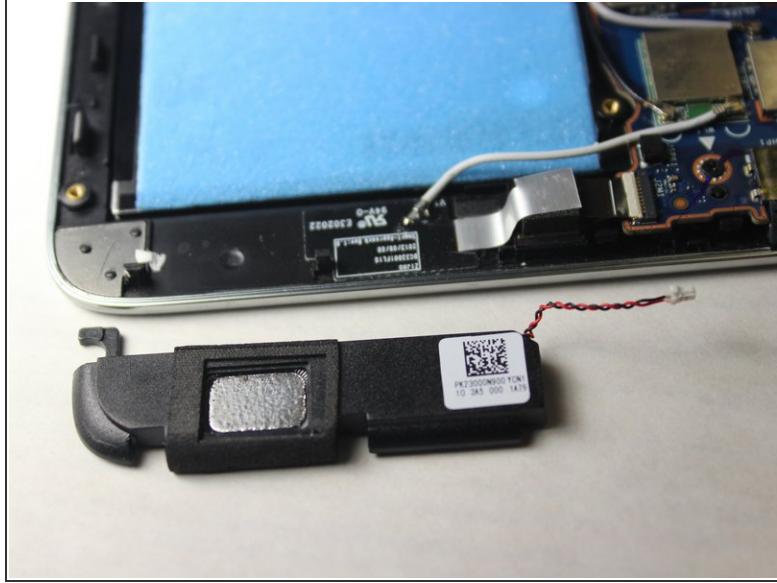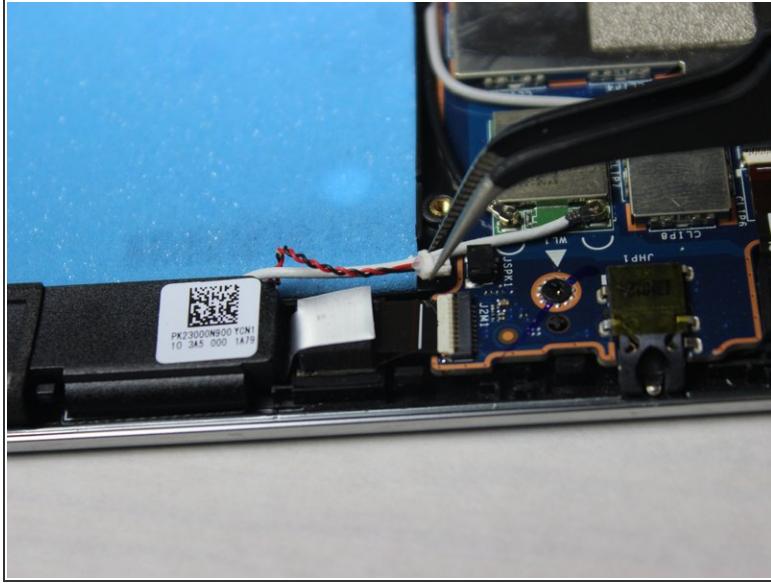

- Remove the red and black connector cable linking the speakers to the motherboard with tweezers by pulling the connector to the left with a light degree of force.

(i) To properly remove the speakers from the casing, push gently left until it shifts, then pull directly up.

This document was generated on 2019-09-26 03:33:16 PM (MST).

To reassemble your device, follow these instructions in reverse order.