




Lenovo Tab 4 TB-8504F Rear Camera Replacement

Learn how to replace the Lenovo Tab 4 8 rear camera.

Written By: Ivan Chavez

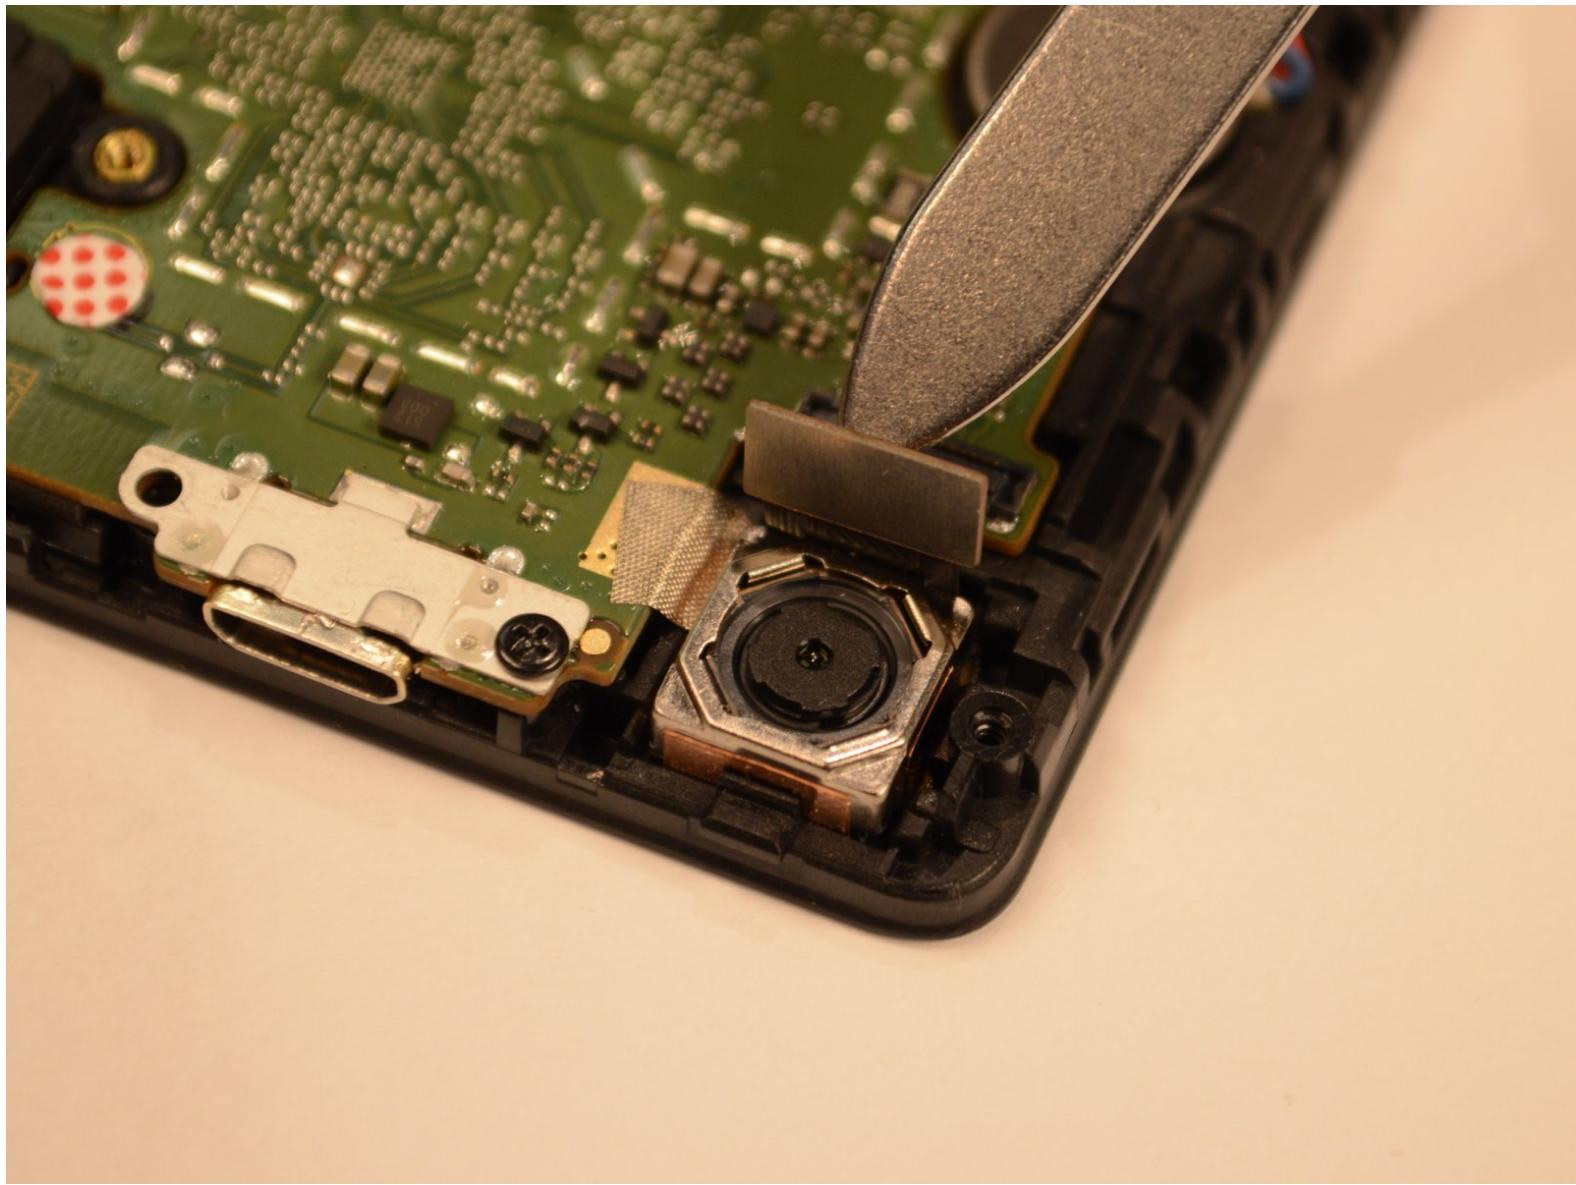

 **TOOLS:**

- [Phillips #000 Screwdriver \(1\)](#)
- [Spudger \(1\)](#)
- [iFixit Opening Picks set of 6 \(1\)](#)
- [Tweezers \(1\)](#)

Step 1 — Battery




- Start at the microSD slot.
- Use the opening pick to slide underneath the back cover of the tablet.
- Slide the opening pick around the tablet until the back cover is off.

Step 2




- Remove the 8 screws with a Phillips #000 screwdriver [bit].
 - There is a screw under the blue "s" sticker.
- Remove tape holding plate down.
- Use precision tweezers or your fingers to remove plate.

Step 3

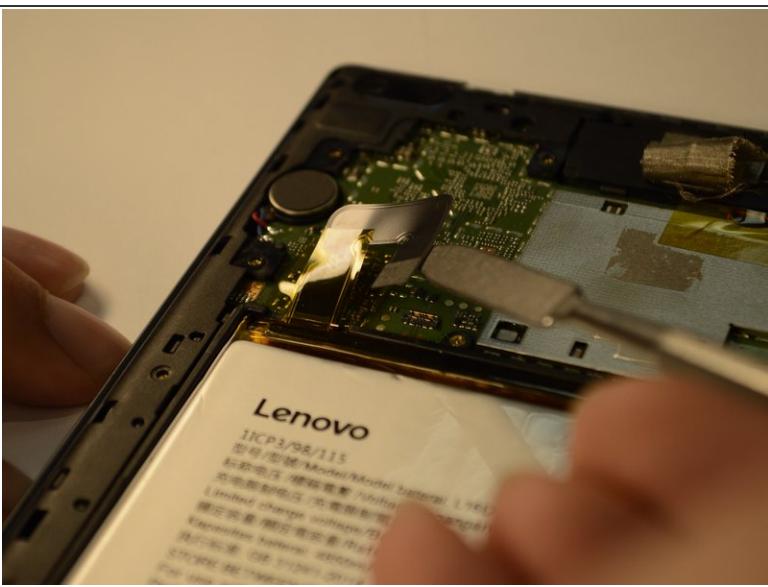

- Remove yellow tape.
- Use a spudger or plastic opening tool to remove the battery's ribbon cable from the motherboard.


Step 4

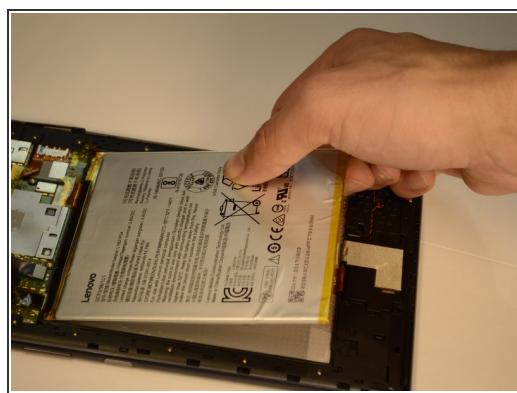

- Gently pull on the two stretch release adhesive strips. Do not pull up, pull away from battery.
- Once the tabs are off, lift the battery up from the frame.

⚠ Do not bend or puncture the battery.

Step 5 — Rear Camera

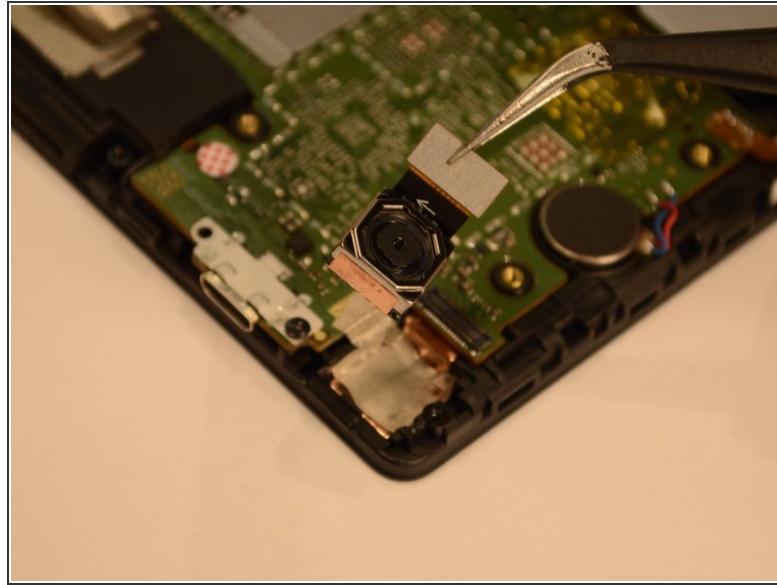

- Use a spudger to lift the rear camera press-fit connector up and free.
- Use tweezers to lift the rear camera out of the frame.

To reassemble your device, follow these instructions in reverse order.