



# Lenovo ThinkPad Helix Screen Replacement

This guide will help you step by step to replace the screen of a Lenovo ThinkPad Helix.

Written By: Manuel Parra Rocha



## INTRODUCTION

This guide will provide information on how to replace a Lenovo Think Pad Helix screen. Be sure to have a clean and large enough workspace to properly replace the screen. Mind you to replace almost all the hardware on ThinkPad Helix you have to take off the screen. So learning how to properly take off the screen will help future replacements.

### TOOLS:


- [iFixit Opening Tools \(1\)](#)

## Step 1 — Screen




- Using a plastic opening tool or opening pick, gently pry the screen off.
- ⚠ If possible, use plastic tools to pry the screen, as the metal tool as shown in the image can potentially damage your device.
- ⓘ You will need to use a little bit of force to pry it open. There is little indent that goes around the tablet. You will insert your tool between this indent and pry it open.
- Once you're able to lift a little bit of the screen away from the tablet, work your way around until screen is separated from tablet. Stop for step two.

## Step 2

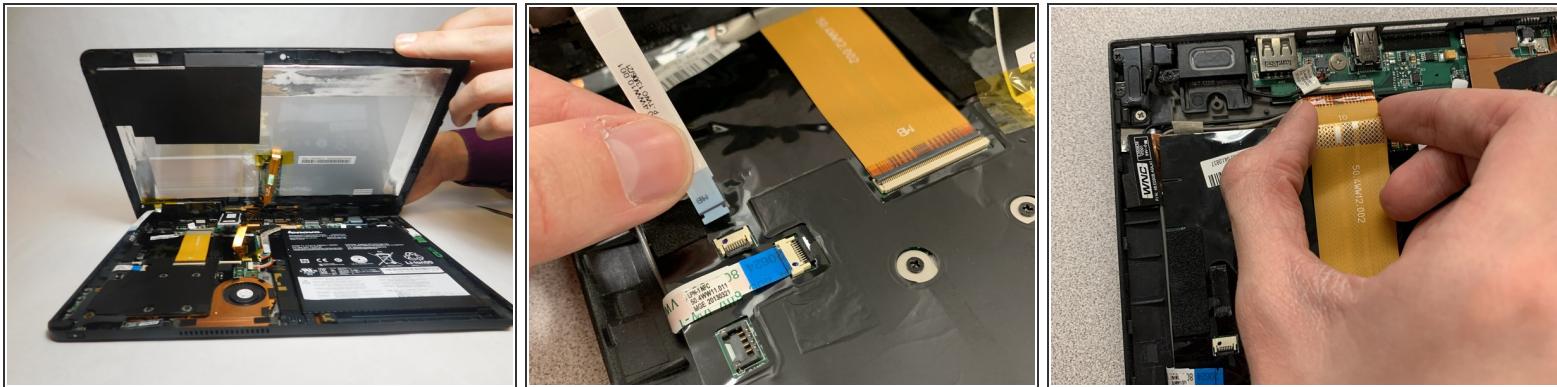

- Lift the screen up slowly.
- Once separated, you can not fully take it off due to some cable connections.
- Open the clips of the ZIF connectors and gently grab the cable to pull it out.

## Step 3

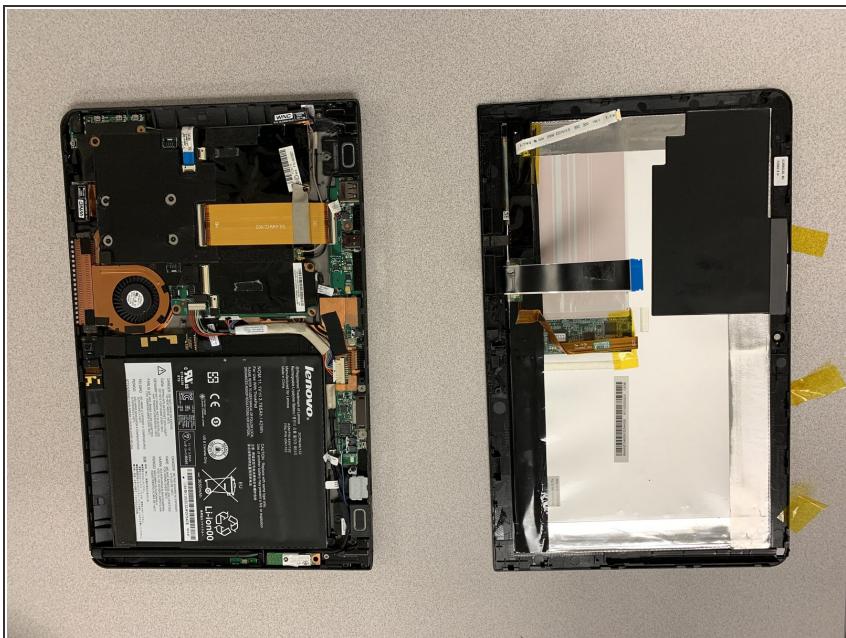

- Once the cables are disconnected, remove the screen.

To reassemble your device, follow these instructions in reverse order.